



# 5. Architectural Glue Patterns

Prof. Dr. U. Aßmann  
Chair for Software Engineering  
Faculty of Computer Science  
Dresden University of  
Technology  
11-1.0, 11/8/11

- 1) Mismatch Problems
- 2) Adapter Pattern
- 3) Facade
- 4) Some variants of Adapter
- 5) Adapter Layers
- 6) Mediator
- 7) Repository Connector

# Literature (To Be Read)


- ▶ D. Garlan, R. Allen, J. Ockerbloom. Architectural mismatch – or why it is so hard to build systems out of existing parts. Int. Conf. On Software Engineering (ICSE 95)  
<http://citeseer.nj.nec.com/garland95architectural.html>
- ▶ GOF – Adapter, Mediator
- ▶ Non-mandatory:
  - Mirko Stölzel. Entwurf und Implementierung der Integration des Dresden OCL Toolkit in Fujaba. Großer Beleg. 2005. Technische Universität Dresden, Fakultät Informatik, Lehrstuhl für Softwaretechnologie

# Goal

- ▶ Understand architectural mismatch
- ▶ Understand design patterns that bridge architectural mismatch


# Architectural Mismatch

- ▶ Case study of Garlan, Allen, Ockerbloom 1995
- ▶ Building the architectural system Aesop

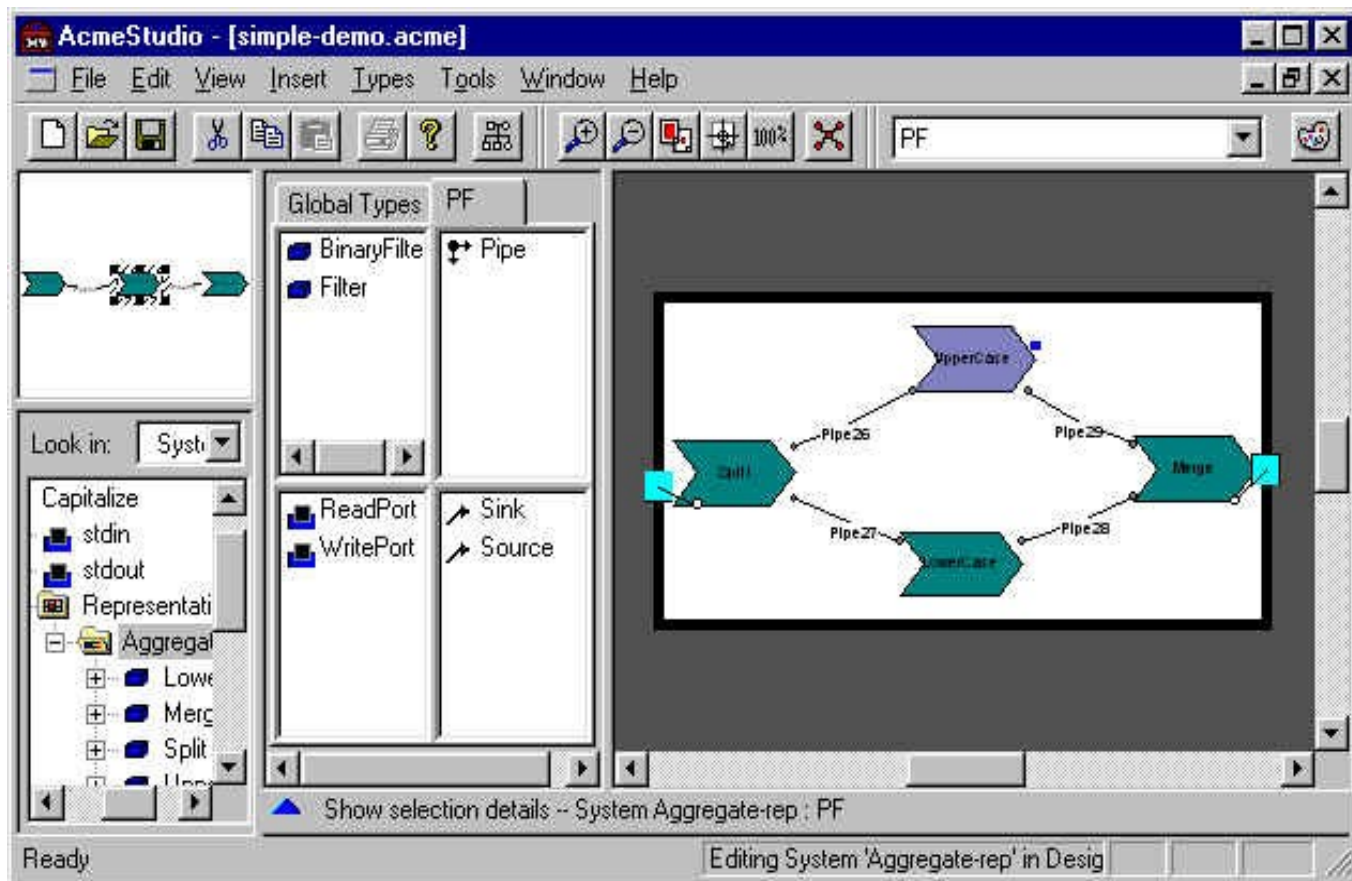


# Architectural Mismatch

- ▶ Aesop was built out of 4 off-the-shelf components
  - OBST: an object-oriented C++ database
  - Interviews and Uniframe, a windowing toolkit
  - Softbench, an event bus (event-based mediator)
  - RPC interface generator of Mach (MIG)
- ▶ All subsystems written in C++ or C
- ▶ First Aesop version took 5 person years, and was still sluggish, very large
- ▶ Problems can be characterized in terms of components and connections

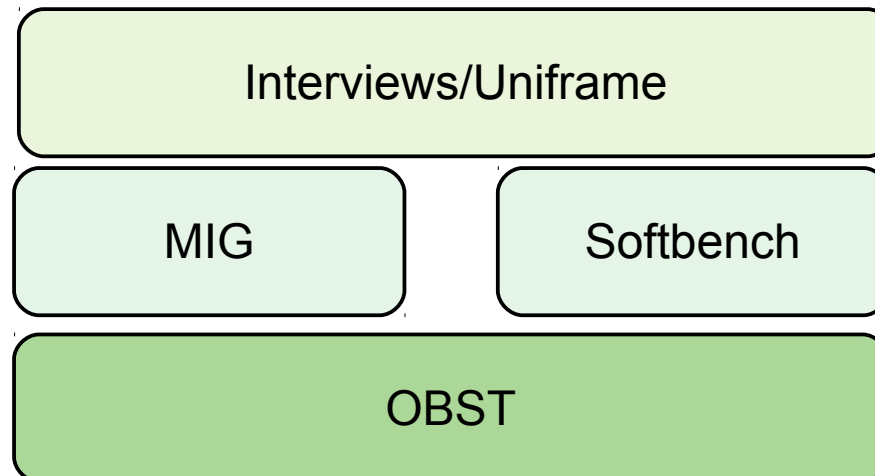

# Classification of Different Assumptions of the COTS

- ▶ Different Assumptions about the *component model*
  - Infrastructure
  - Control model
  - Data model
- ▶ Different assumptions about the *connectors*
  - Protocols
  - Data models
- ▶ Different assumptions about the *global architectural structure*
- ▶ Different assumptions about the *construction process*

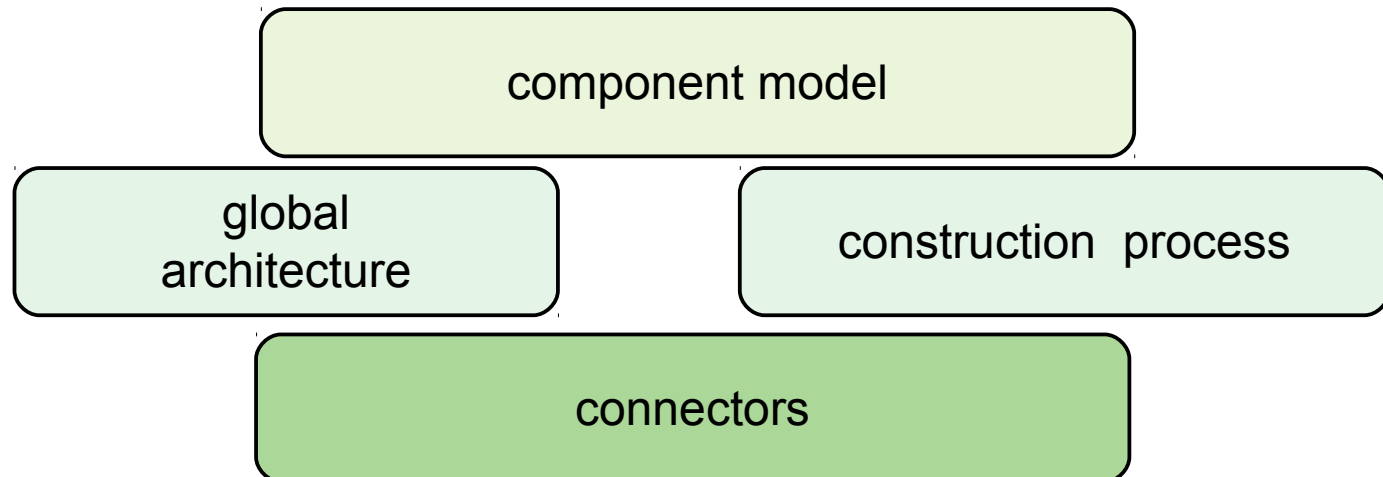

# Different Assumptions about the Component Model

- ▶ A component model assembles information and constraints about the nature of components
  - Nature of interfaces
  - Substitutability of components
- ▶ Here: Infrastructure, Control model, Data model
- ▶ Different Assumptions about the Component Infrastructure:
  - Components assume that they should provide a certain infrastructure, which the application does not need
  - OBST provides many library functions for application classes; Aesop needed only a fraction of those
- ▶ Components assume they have a certain infrastructure, but it is not available
  - Softbench assumed that all other components have access to an X window server (for communication)
- ▶ More in “Component-Based Software Engineering”, summer semester

# Assumptions on Control Model

- ▶ COTS think differently in which components have the main control
  - Softbench, Interviews, and MIG have an ever-running event loop inside
  - They call applications with callbacks (observer pattern)
- ▶ However, they use different event loops:
  - Softbench uses X window event loop
  - MIG and Interviews have their own ones
  - The event loops had to be reengineered, to fit to each other



# Assumptions on Data Model

- ▶ Different assumptions about the data
  - Uniframe: hierarchical data model
  - Manipulations only on a parent, never on a child
  - However, the application needed that
  - Decision: rebuild the data model from scratch, is cheaper than modification




# Assumptions about the Connectors

# Protocol Mismatch

- ▶ Softbench works asynchronously; which superimposes concurrency to tools
  - Softbench is a mediator between tools
- ▶ 2 kinds of interaction protocols
  - Request/Reply (callback, observer): tool requests a service, registers a callback routine, is called back by Softbench
  - Notify via Softbench

# Protocol Mismatch

- ▶ Softbench works asynchronously; which superimposes concurrency to tools, when messages of different tools are crossing

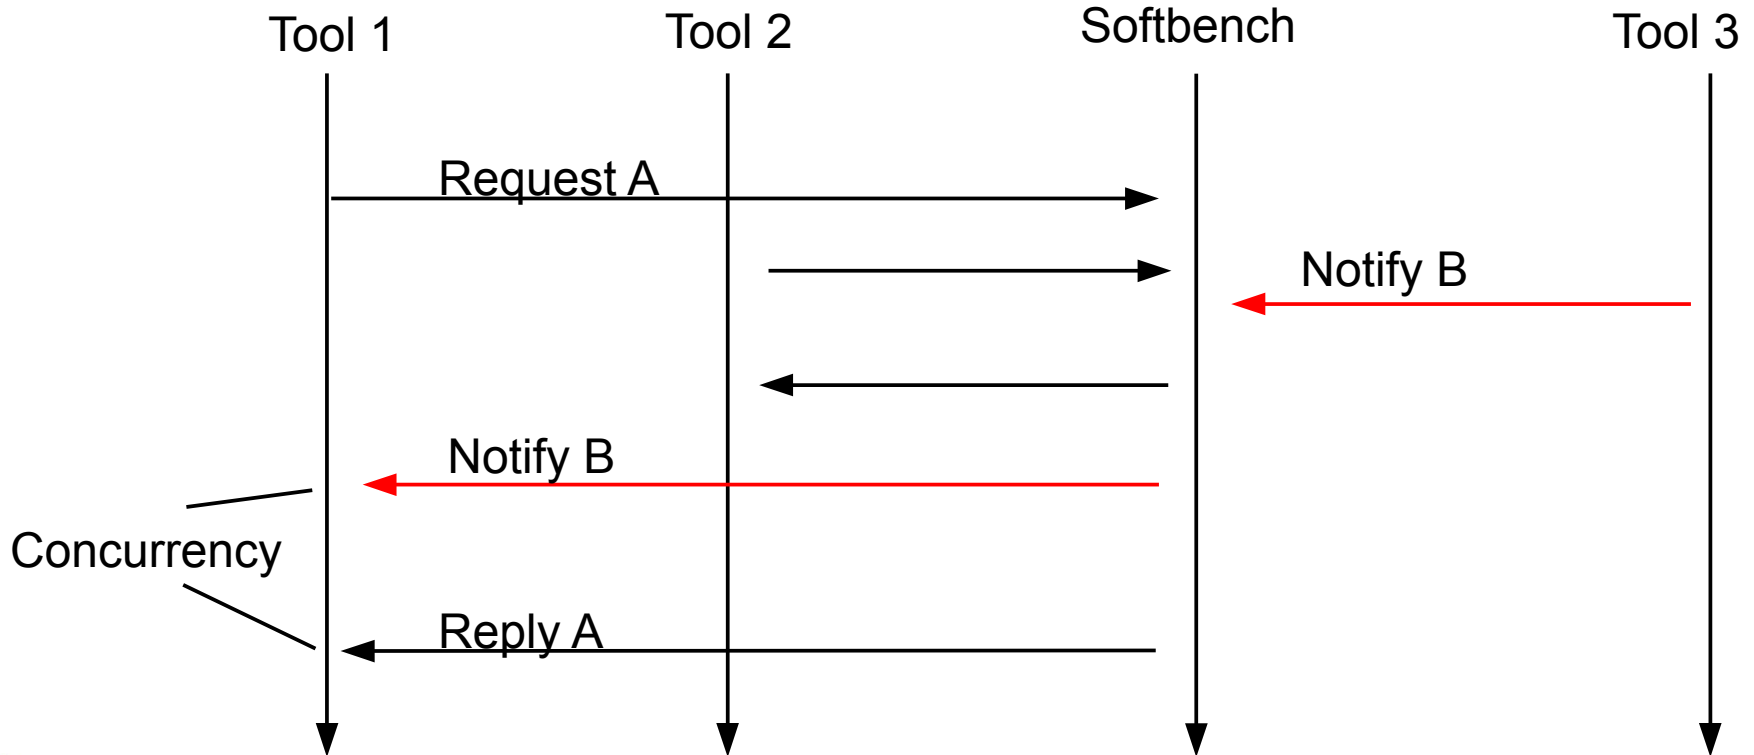

# Data Format Mismatch

- ▶ Components also have different assumptions what comes over a channel (a connection).
  - Softbench: Strings
  - MIG: C data
  - OBST: C++ data
- ▶ Requires translation components
  - When accessing OBST, data must be translated all the time
  - This became a performance bottleneck

# Assumptions about the Global Architecture

- ▶ OBST
  - Assumes a database-centered architecture
  - Assumes independence of client tools
  - And provides a transaction protocol per single tool, not per combination of tools
  - Doesn't help when tools have interactions

# Assumptions about the Building Process

- ▶ Assumptions about the library infrastructure
- ▶ Assumptions about a generic language (C++)
- ▶ Assumptions about a tool specific language
- ▶ Combination is fatal:
  - Some component A may have other expectations on the generated code of another component B as B itself
  - Then, the developer has to patch the generated code of A with patch scripts (another translation component)

# Proposed Solutions of [Garlan]

- ▶ Make *all* architectural assumptions explicit
  - Problem: how to document or specify them?
  - Many of the aforementioned problems are not formalized
  - Implicit assumptions are a violation of the information hiding principle, and hamper variability
- ▶ Make components more independent of each other
- ▶ Provide bridging technology
  - For building language translation components (compiler construction, compiler generators, XML technology)
- ▶ Distinguish architectural styles (architectural patterns) explicitly
  - Distinguish connectors explicitly
- ▶ Solution: design patterns serve all of these purposes



# Usability of Extensibility Patterns

- ▶ All extensibility patterns can be used to treat architectural mismatch
- ▶ Behavior adaptation
  - ChainOfResponsibility as filter for objects, to adapt behavior
  - Proxy for translation between data formats
  - Observer for additional behavior extension, listening to the events of the subject
  - Visitor for extension of a data structure hierarchy with new algorithms
- ▶ Bridging data mismatch
  - Decorator for wrapping, to adapt behavior, and to bridge data mismatch, not for protocol mismatch
  - Bridge for factoring designs on different platforms (making abstraction and implementation components independent)



## 5.2 Adapter

---


---

# Object Adapter


- ▶ An object adapter is a proxy that maps one interface to another
  - Or a protocol
  - Or a data format
- ▶ An adapter cannot easily map control flow to each other
  - Since it is passed *once* when entering the adapted class

# Object Adapter

- ▶ Object adapters use delegation

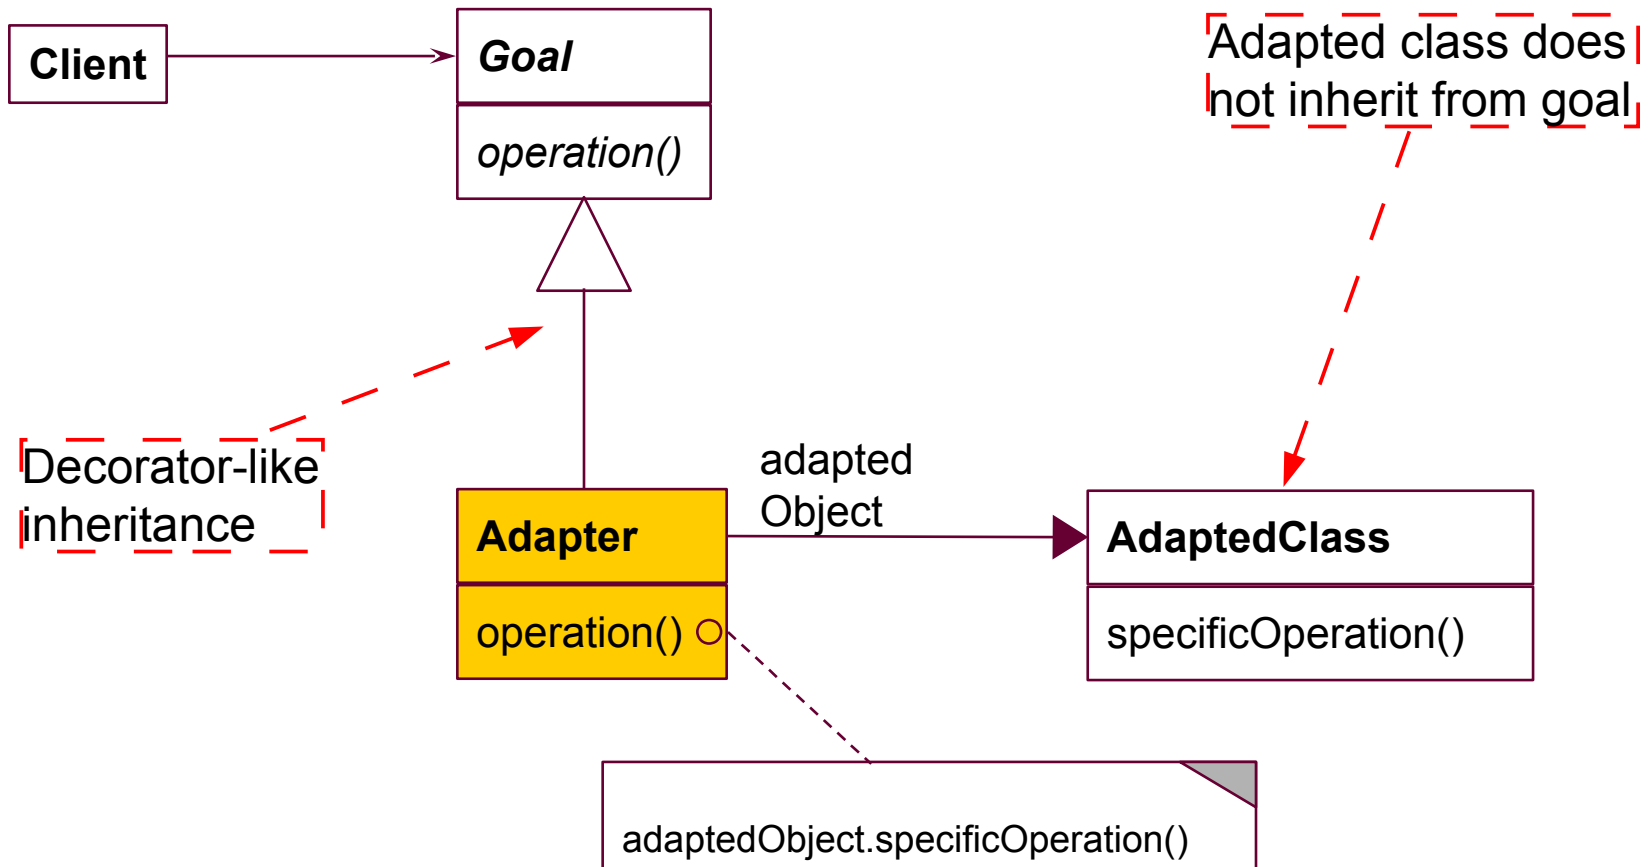


# Example: Use of an External Class Library For Texts

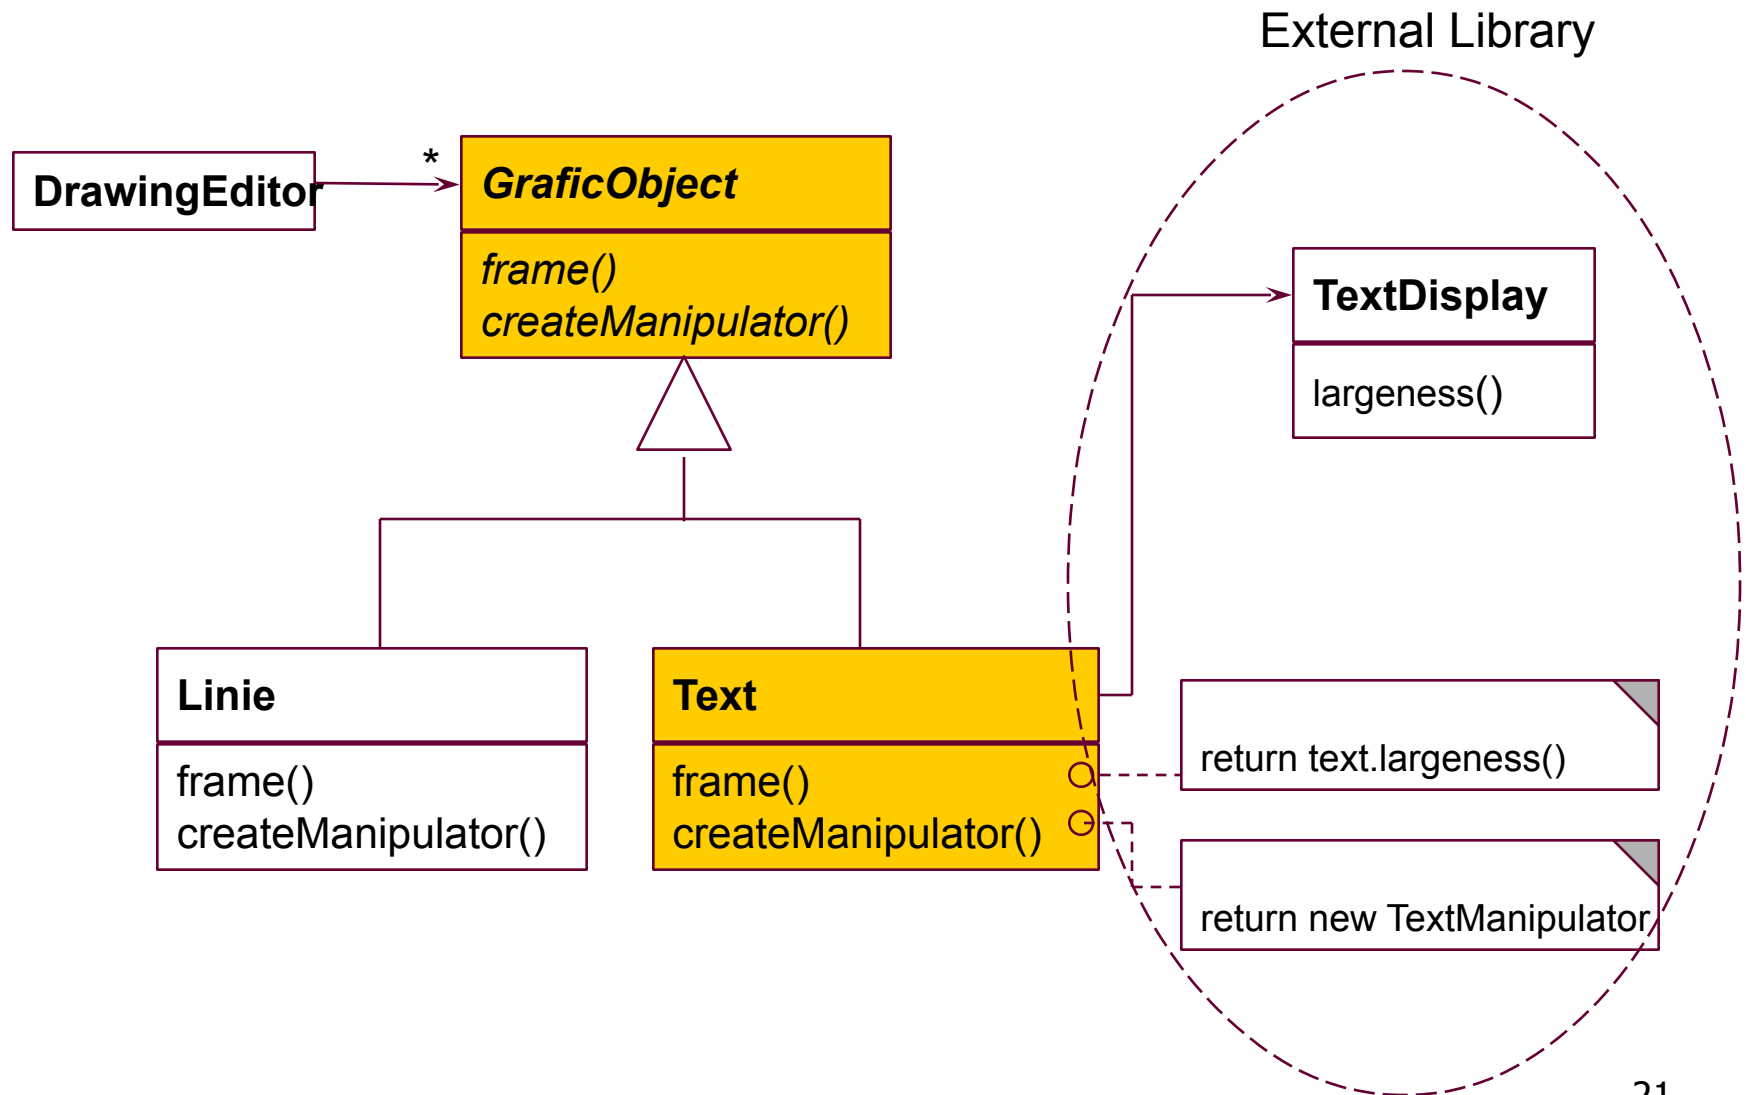

# Adapters for COTS

- ▶ Adapters are often used to adapt components-off-the-shelf (COTS) to applications
- ▶ For instance, an EJB-adapter allows for reuse of an Enterprise Java Bean in an application

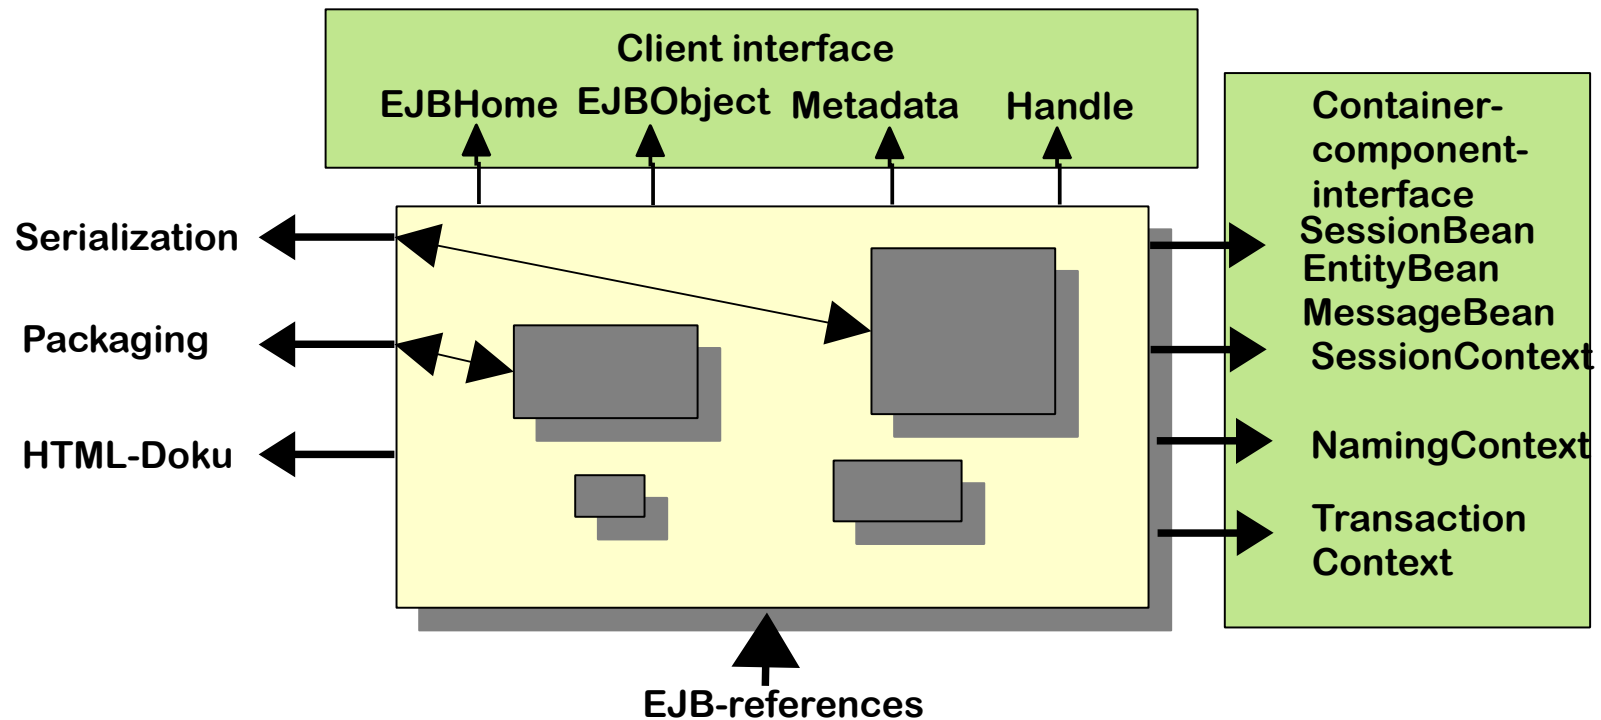

# EJB Adapter

Client interface  
EJBHome EJBObject Metadata Handle

BillingApplication

\*

Bill

*addItem(Item)*  
*calculateSum()*

EJBHome

getBean()

EJBObject

EJBMetaData

EJBHandle

OtherBill

*addItem(Item)*  
*calculateSum()*

EJBBill

fetchBean()  
*addItem(Item)*  
*calculateSum()*

.. contact EJBHome for EJB...  
.. if not there, create EJBObject

.. EJBObject = fetchBean();  
.. addItem(EJBObject, Item)

.. EJBObject = fetchBean();  
.. sum up (EJBObject)





# A Remark to Adapters in Component Systems

- ▶ Component models define *standard, unspecific* interfaces
  - E.g., EJBHome / EJBObject
- ▶ Classes usually define *application-specific* interfaces
- ▶ To increase reuse of classes, the Adapter pattern(s) can be used to map the application-specific class interfaces to the unspecific component interfaces
- ▶ Example:
  - In the UNIX shell, all components obey to the pipe-filter interfaces *stdin*, *stdout*, *stderr* (untyped channels or streams of bytes)
  - The functional parts of the components have to be *mapped* by some adapter to the unspecific component interfaces.



# Adapters and Decorators

- ▶ Similar to a decorator, an adapter inherits its interface from the goal class
  - but adapts the interface
- ▶ Hence, adapters can be *inserted* into inheritance hierarchies later on

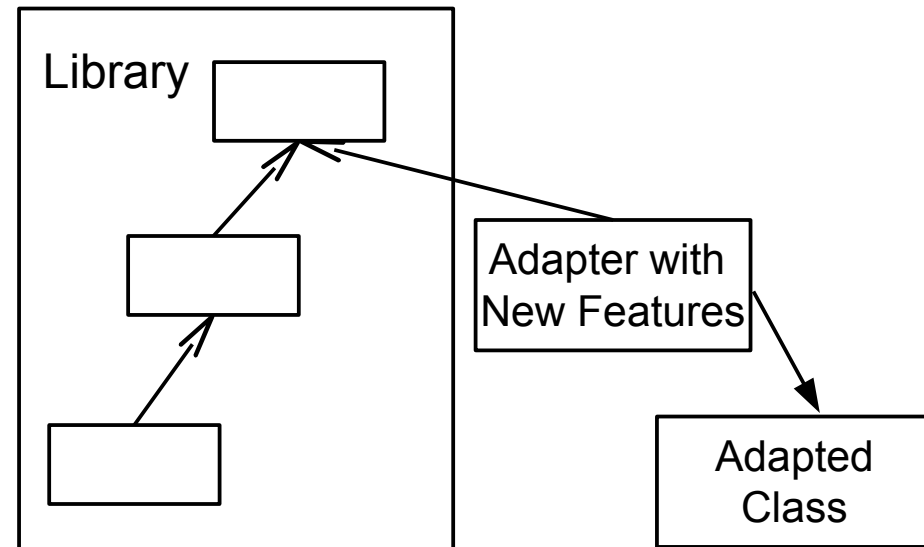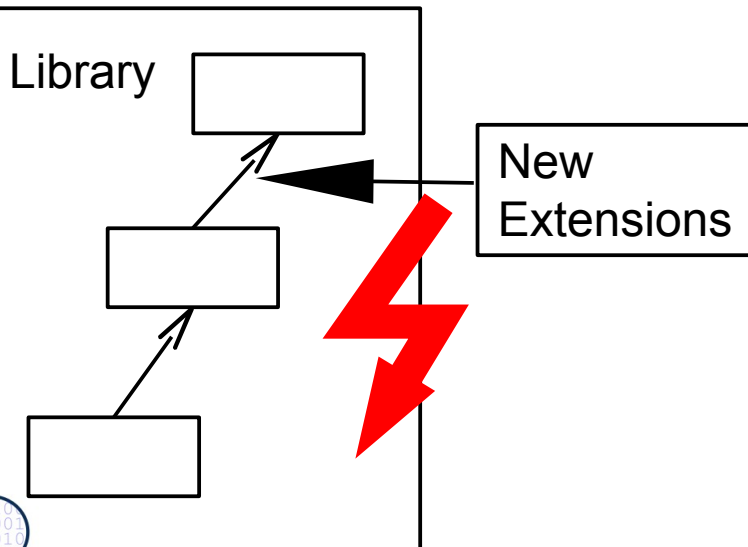




## 5.3 Facade

---


- A **facade** is an object adapter that hides a complete set of objects (subsystem)
  - Or: a proxy that hides a subsystem
  - The facade has to map its own interface to the interfaces of the hidden objects

# Facade Hides a Subsystem

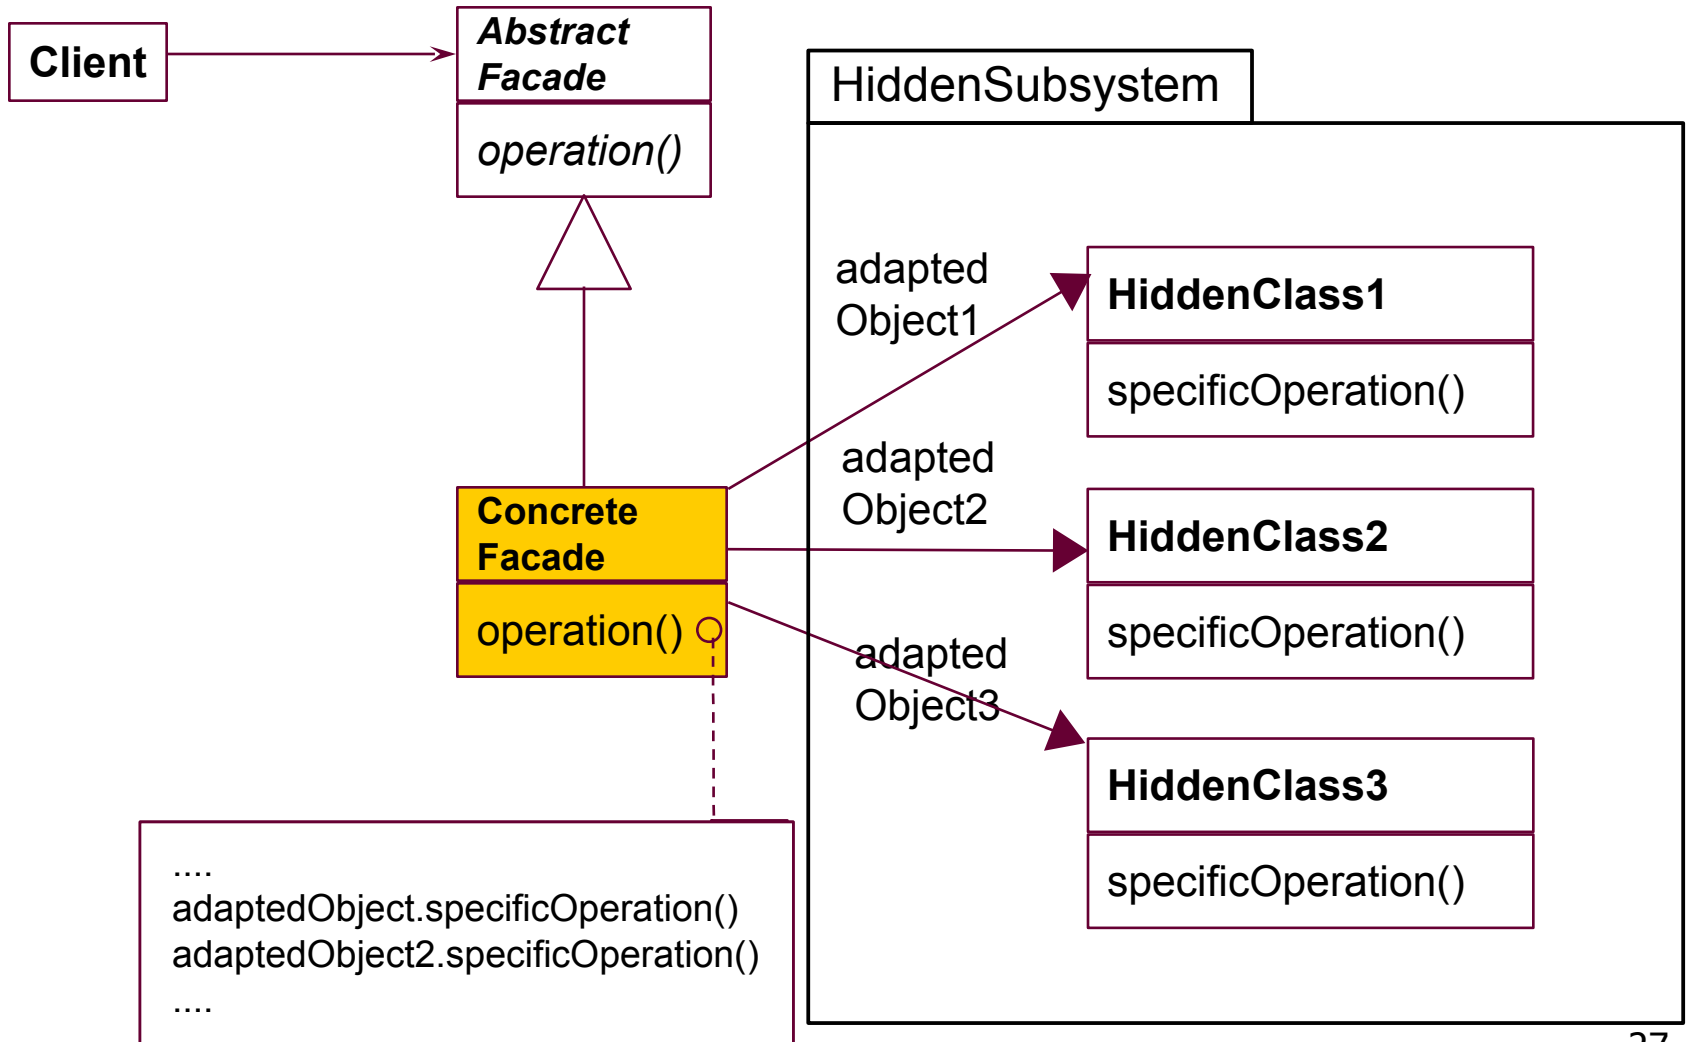


# 5.4 Class Adapter (Integrated Adapter)

- ▶ Instead of delegation, class adapters use multiple inheritance

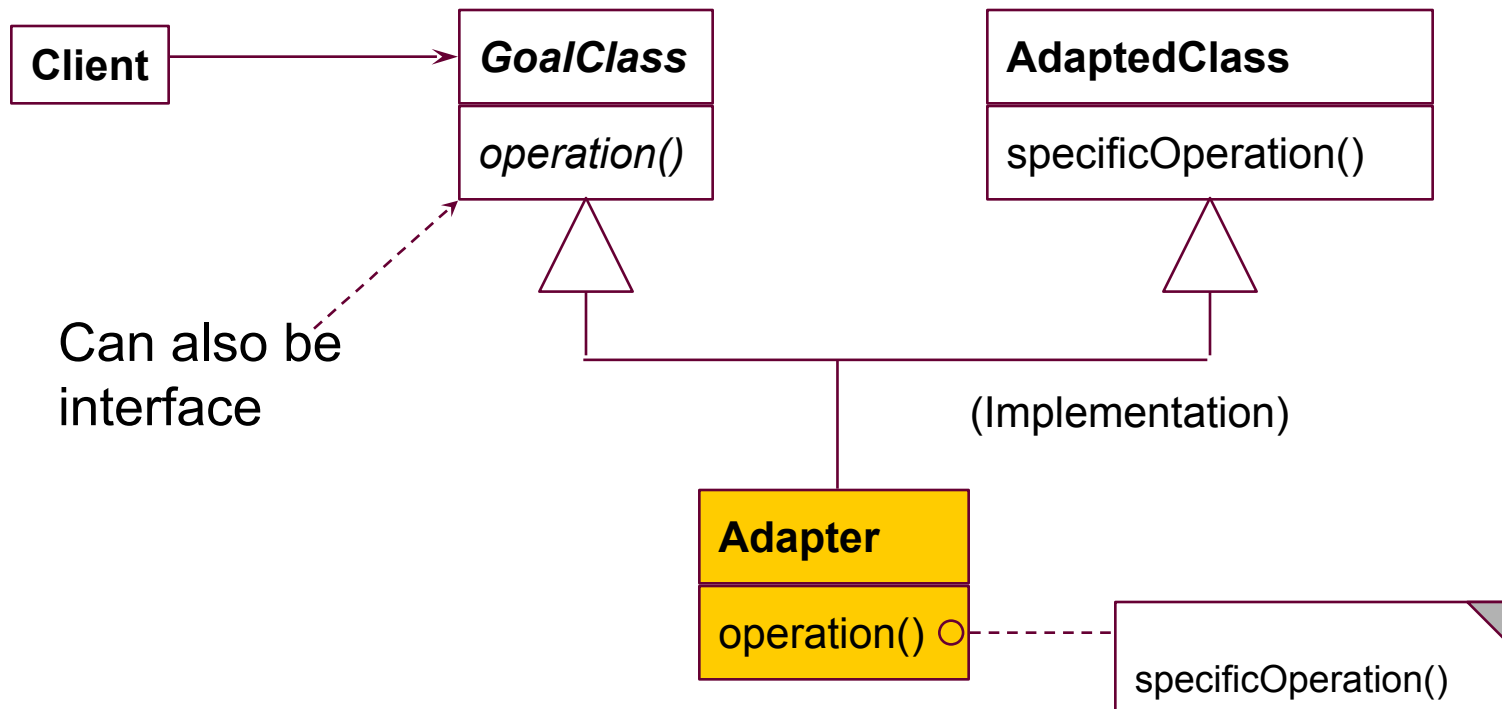


# 2-Way Class Adapter (Role Mediator)

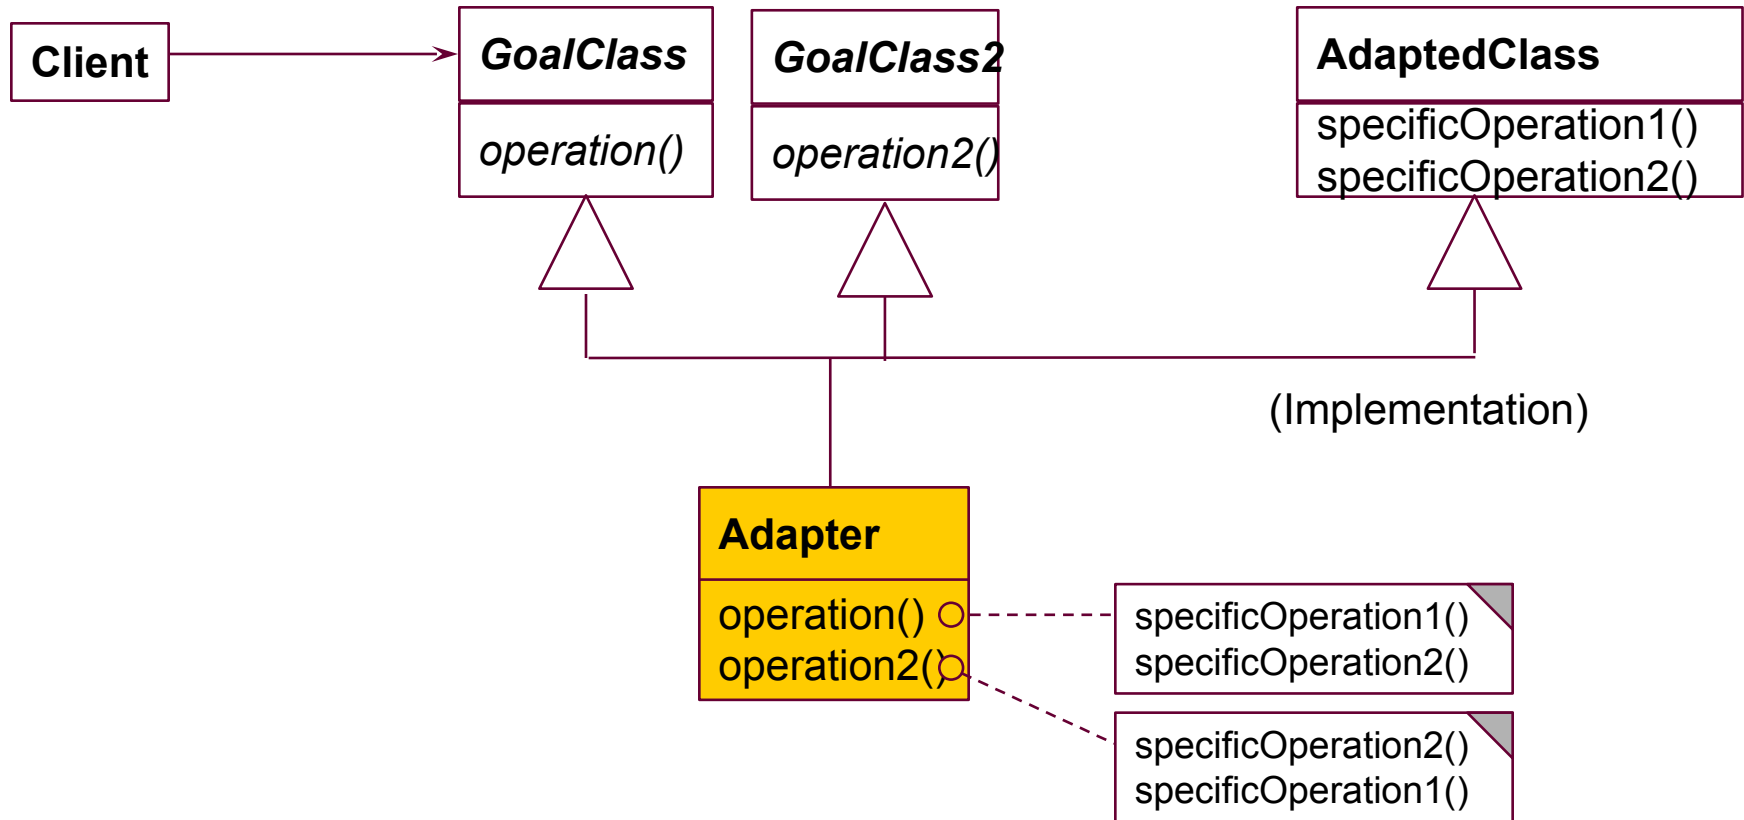


More than one goal class may exist.  
Every goal class plays a *role* of the concrete object (see later).

# 2-Way Adapter for Coupling of Class Hierarchies

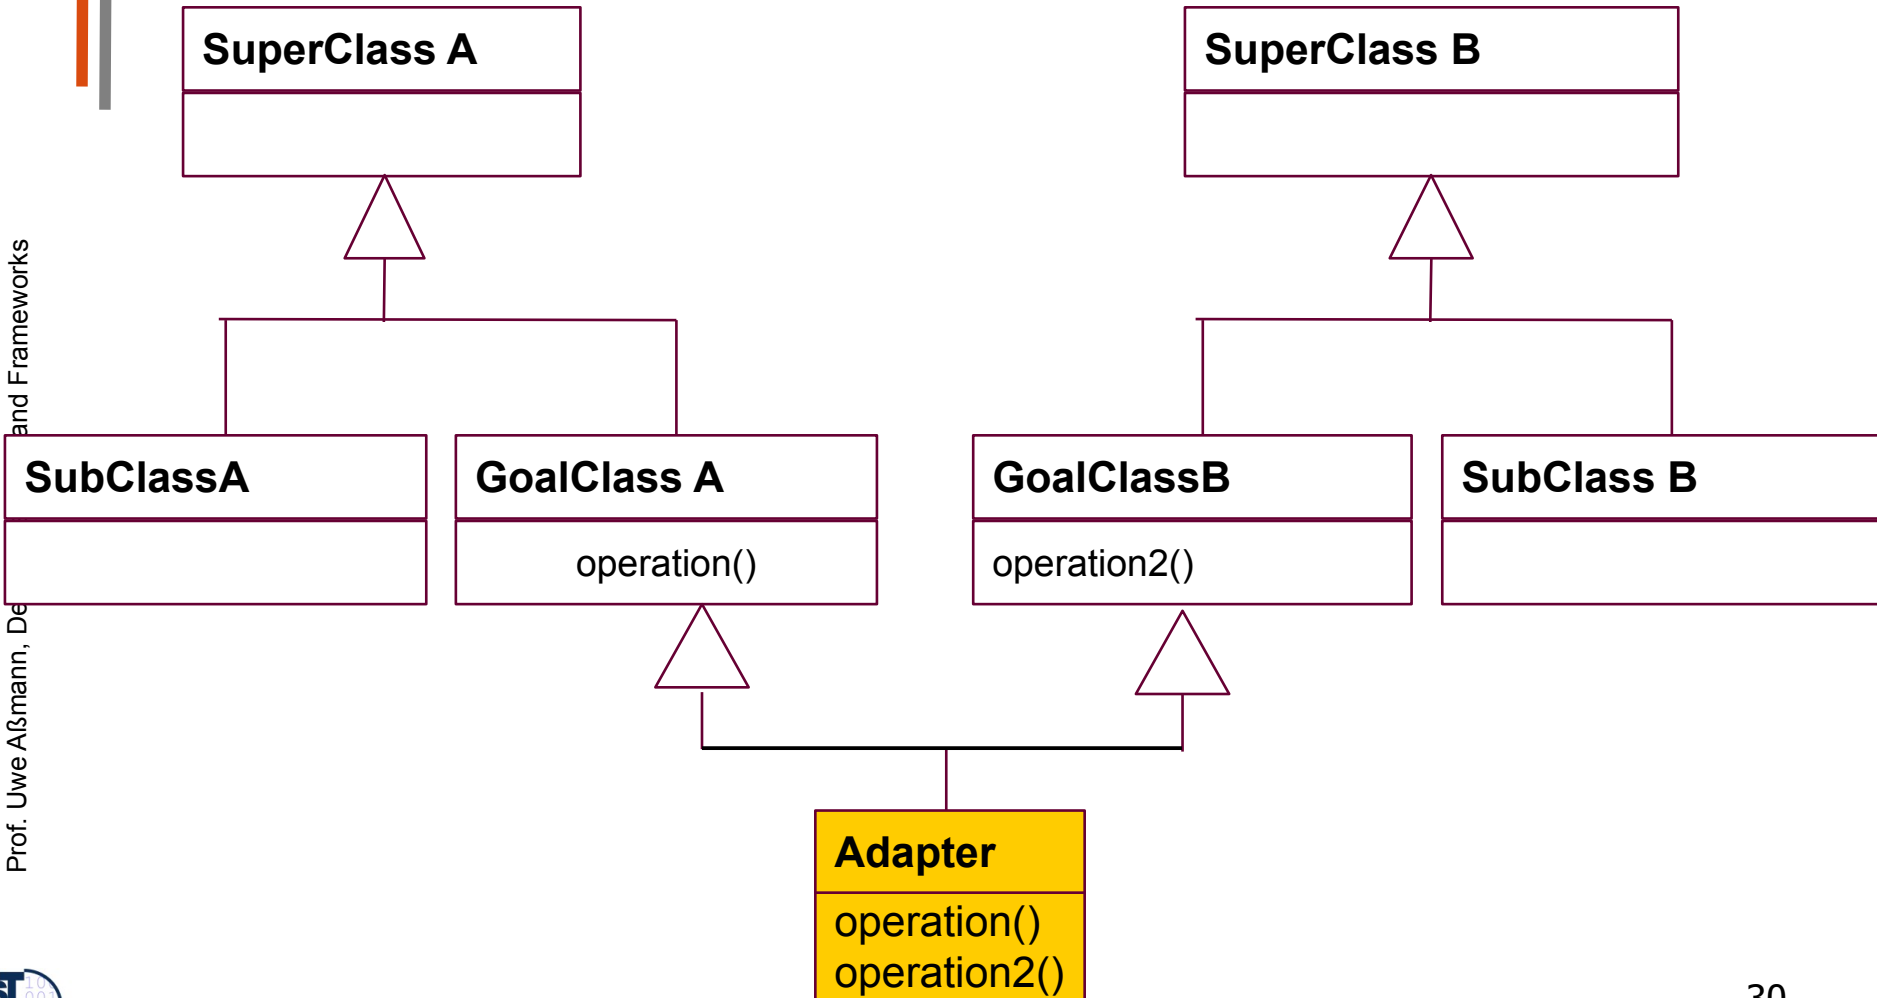


# 2-Way Decorator and Adapter for Coupling of Class Hierarchies

Prof. Uwe Alßmann, Design Patterns and Frameworks

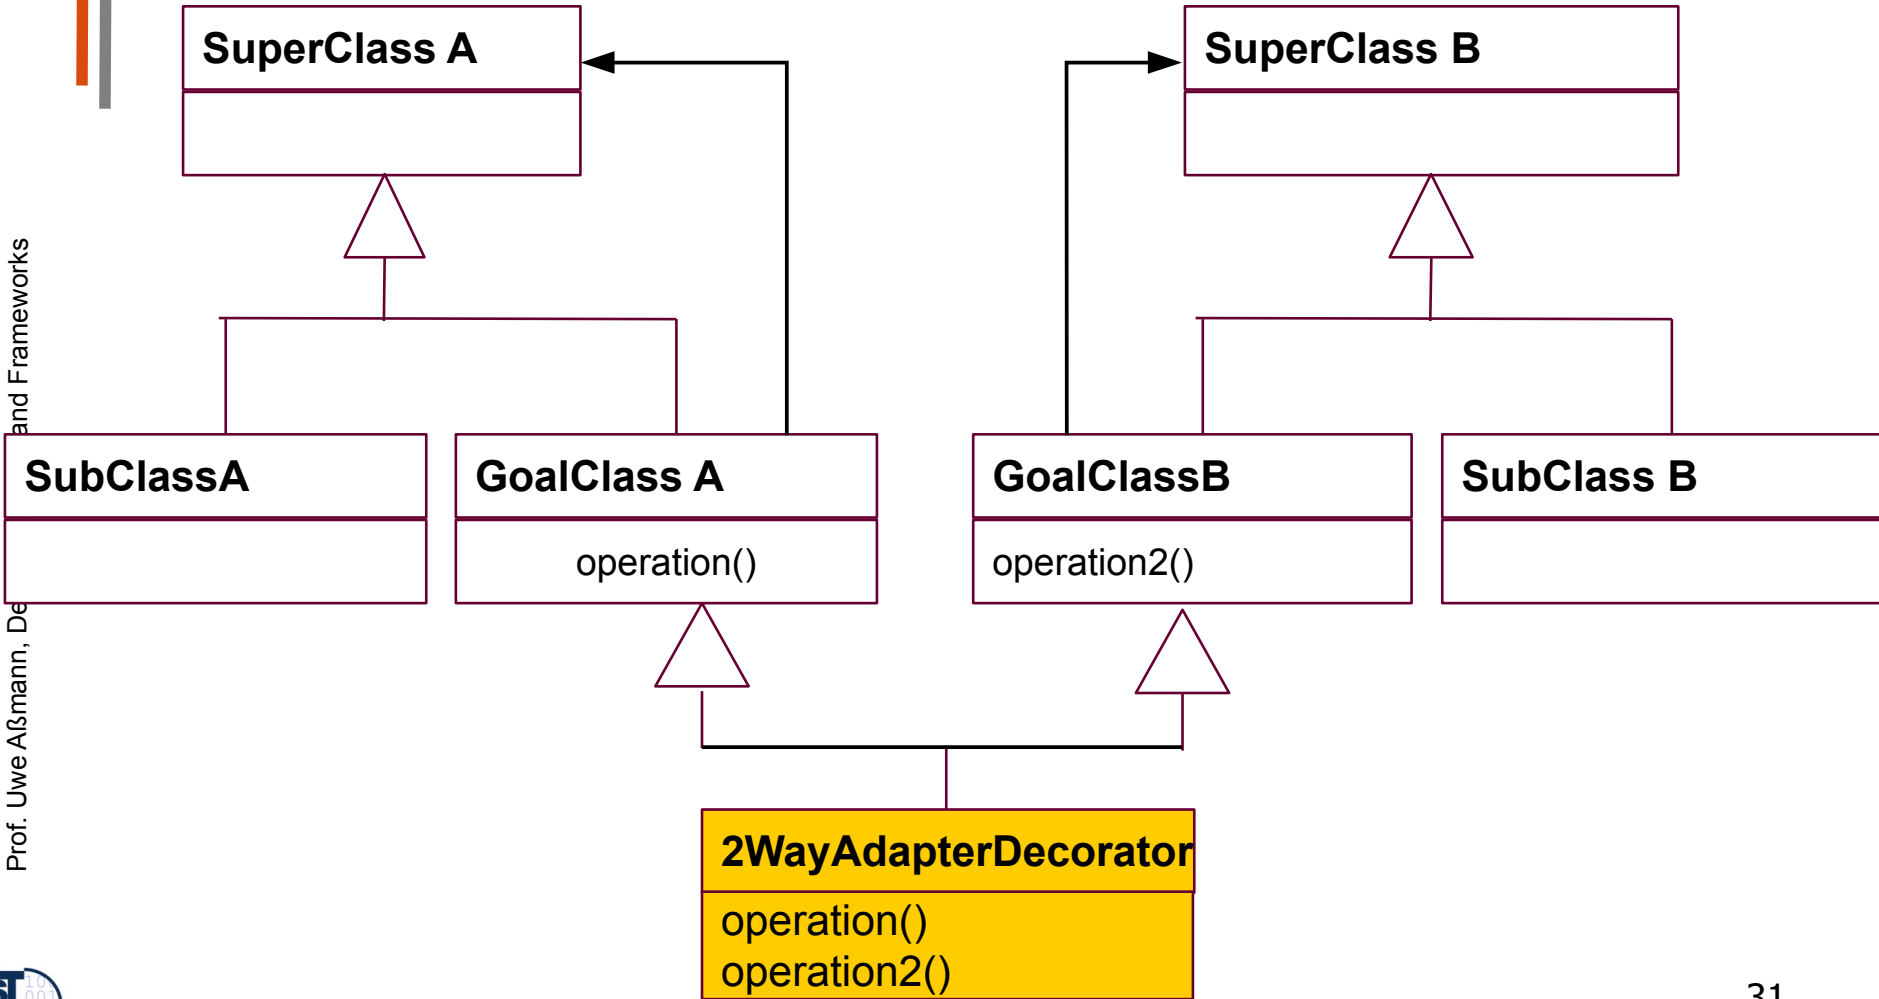

# Ex.: 2-Way Decorator and Adapter for Coupling of Class Hierarchies

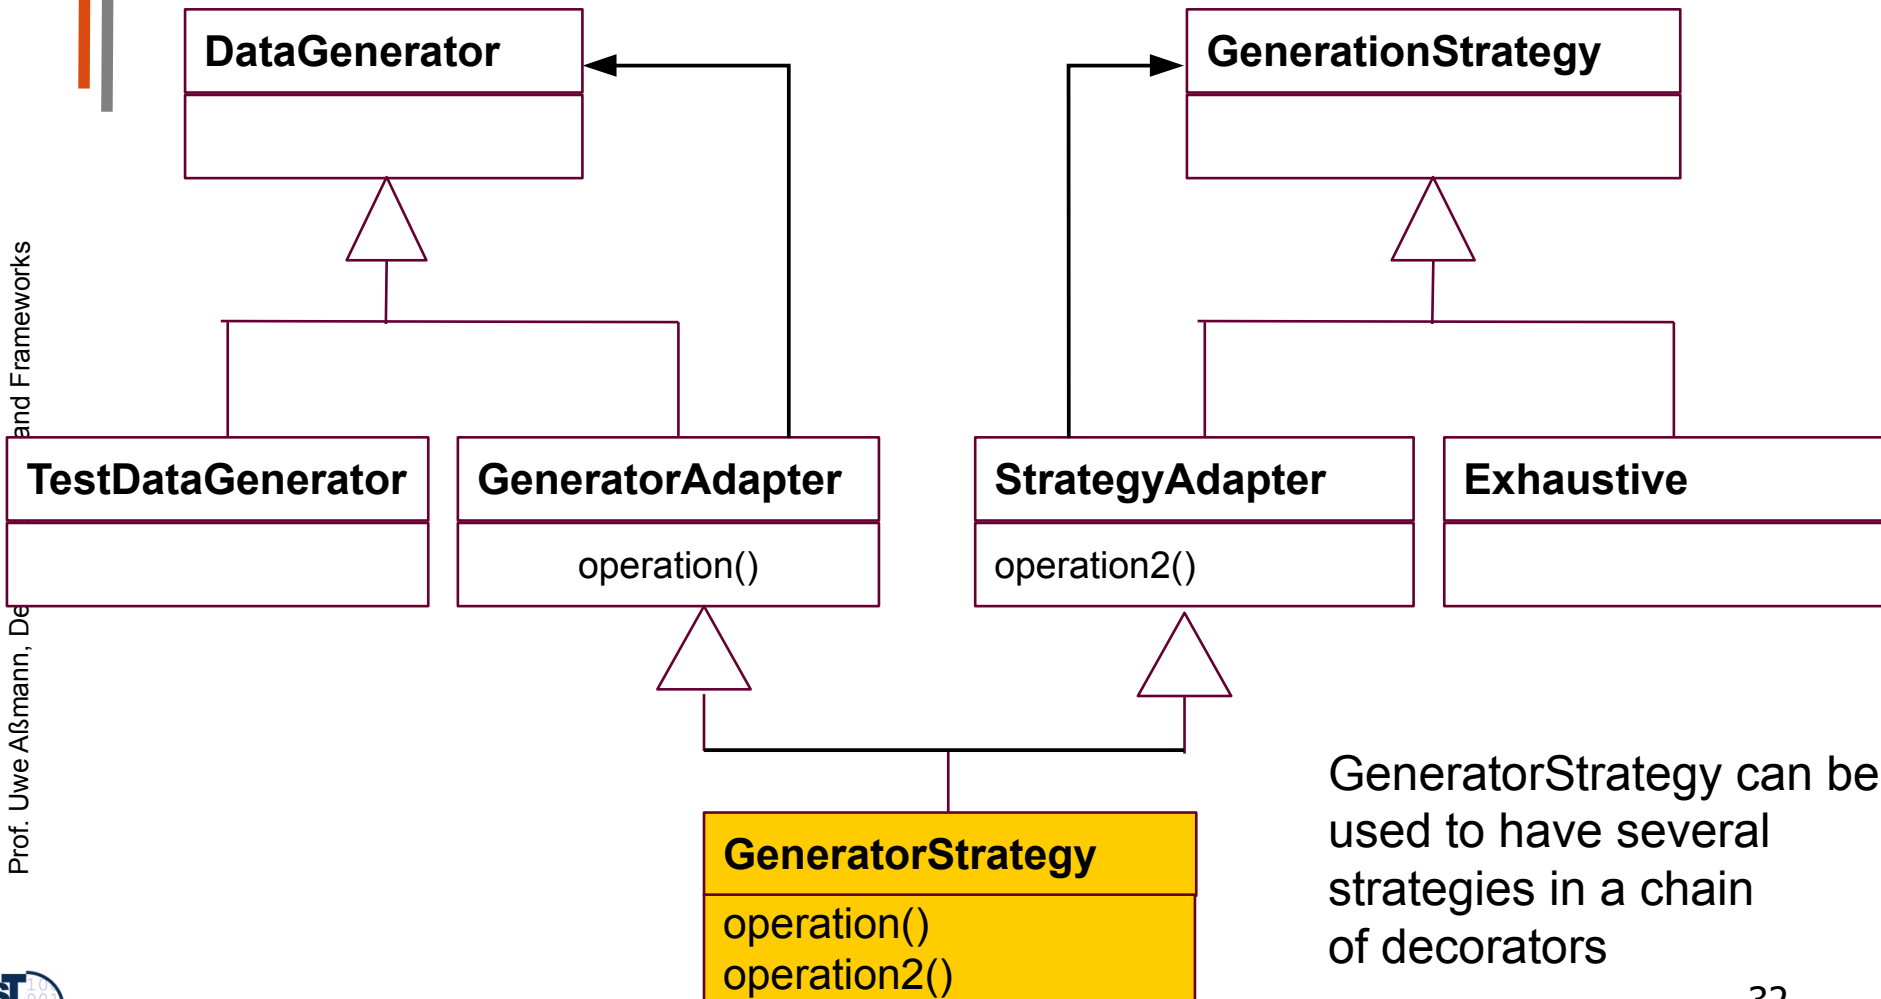

GeneratorStrategy can be used to have several strategies in a chain of decorators








## 5.5 Adapter Layers

---

---


# Adapter Layer

- ▶ An **Adapter Layer** is a set of adapters hiding a sublayer
  - Every layer has different interfaces (services) that are mapped

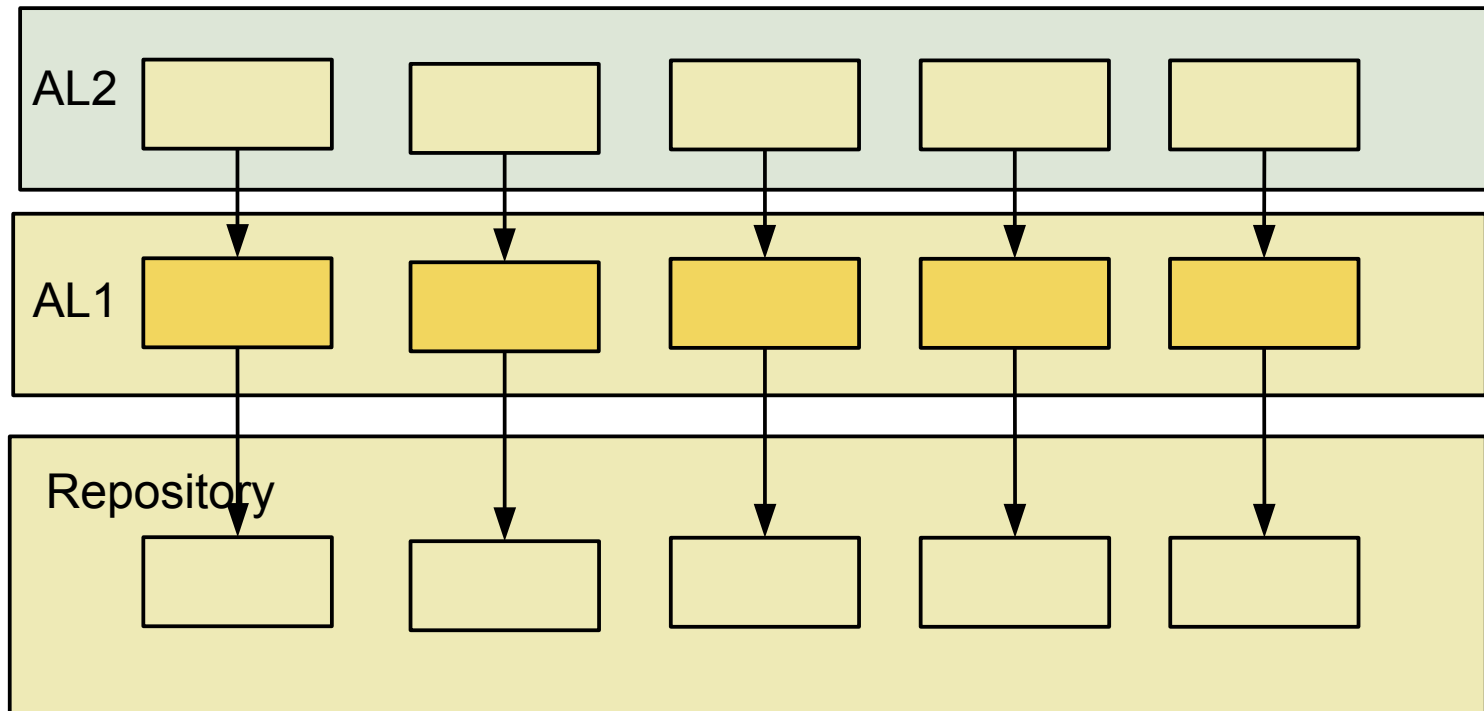

# Object Skin Layers

- ▶ An **Object Skin Layer** is a stack of adapter layers in which the adapters vertically form a subject (complex object)
  - Every layer has different interfaces (services) that are mapped, but within the object

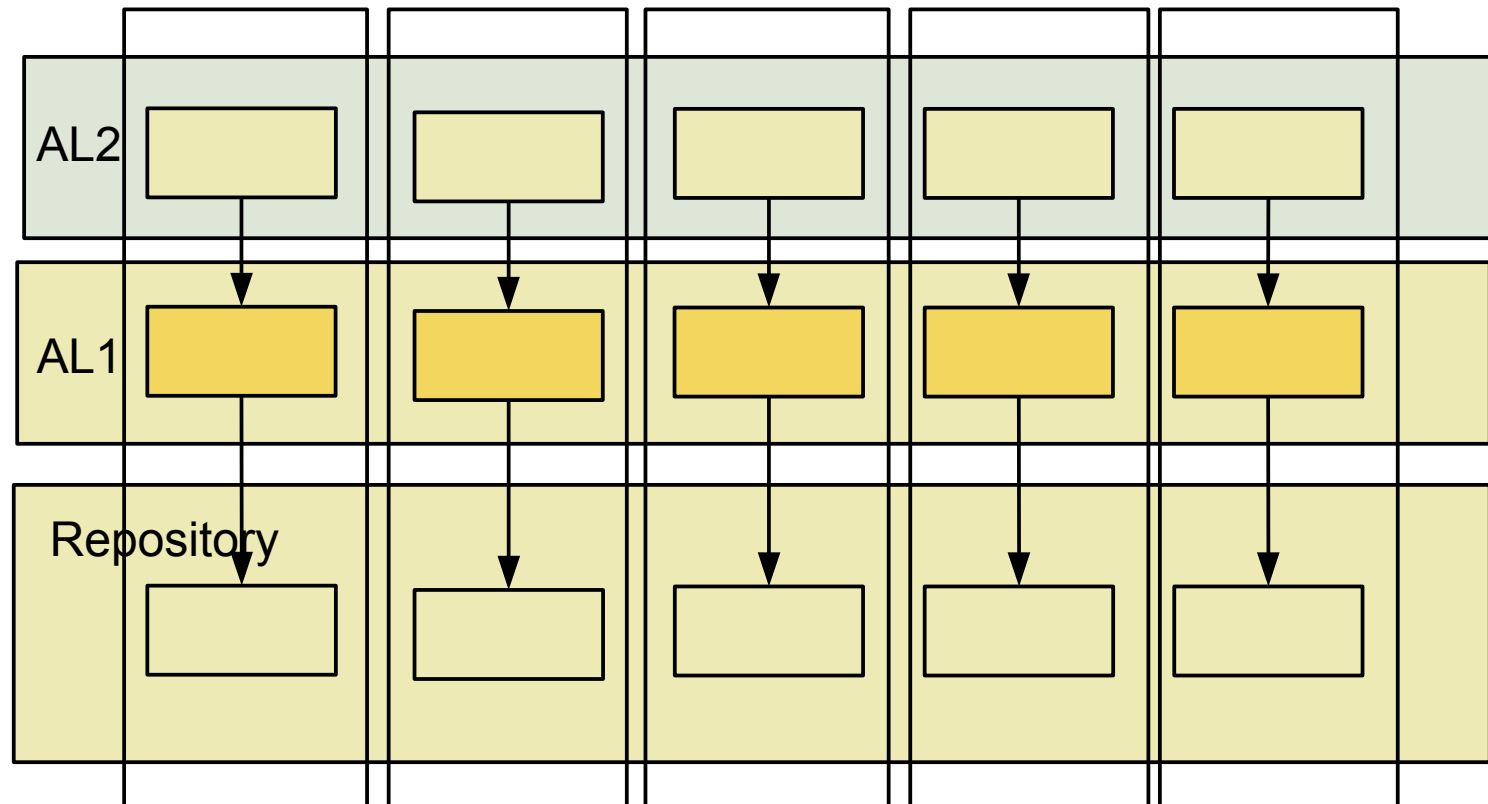



## 5.6 Mediator (Broker)


---

---


# Mediator (Broker)

- ▶ A mediator is an n-way proxy for communication
  - Combined with a Bridge
- ▶ A mediator serves for
  - *Anonymous* communication
  - *Dynamic* communication nets


# Mediator

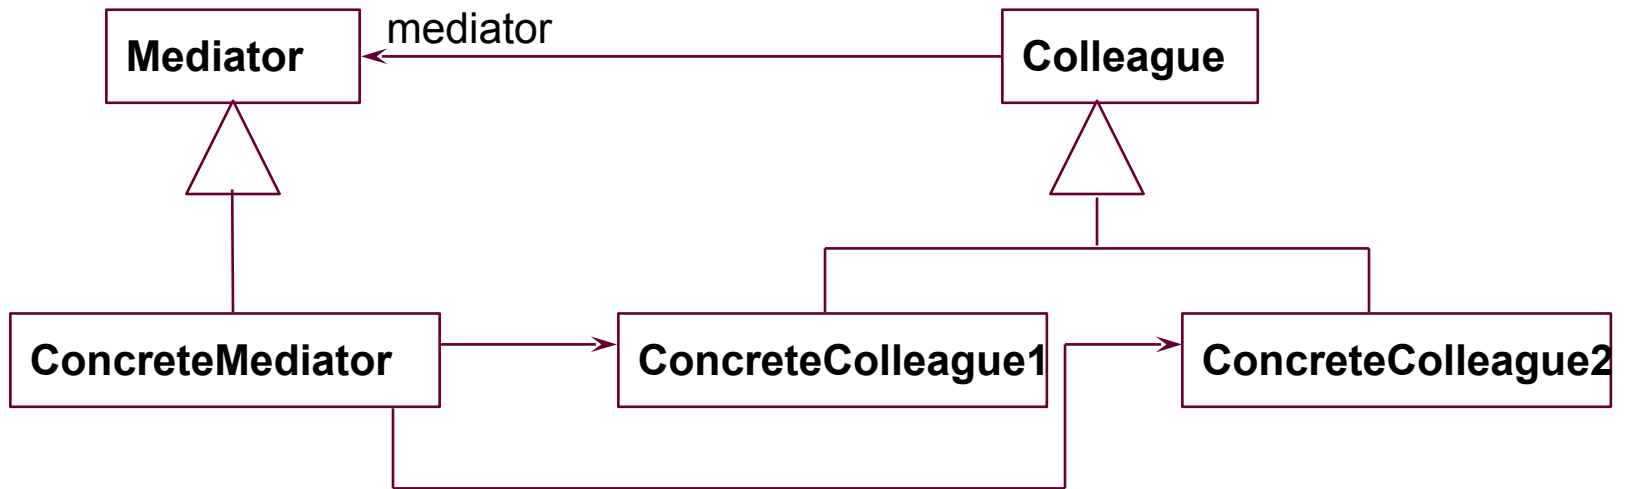

Typical Object Structure:

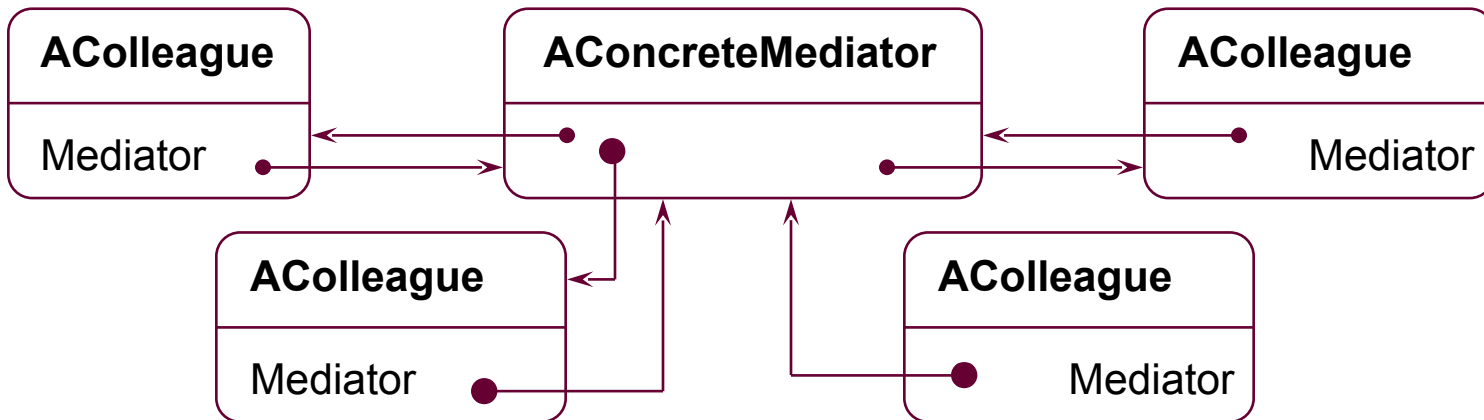

# Mediator As n-Proxy and Bridge

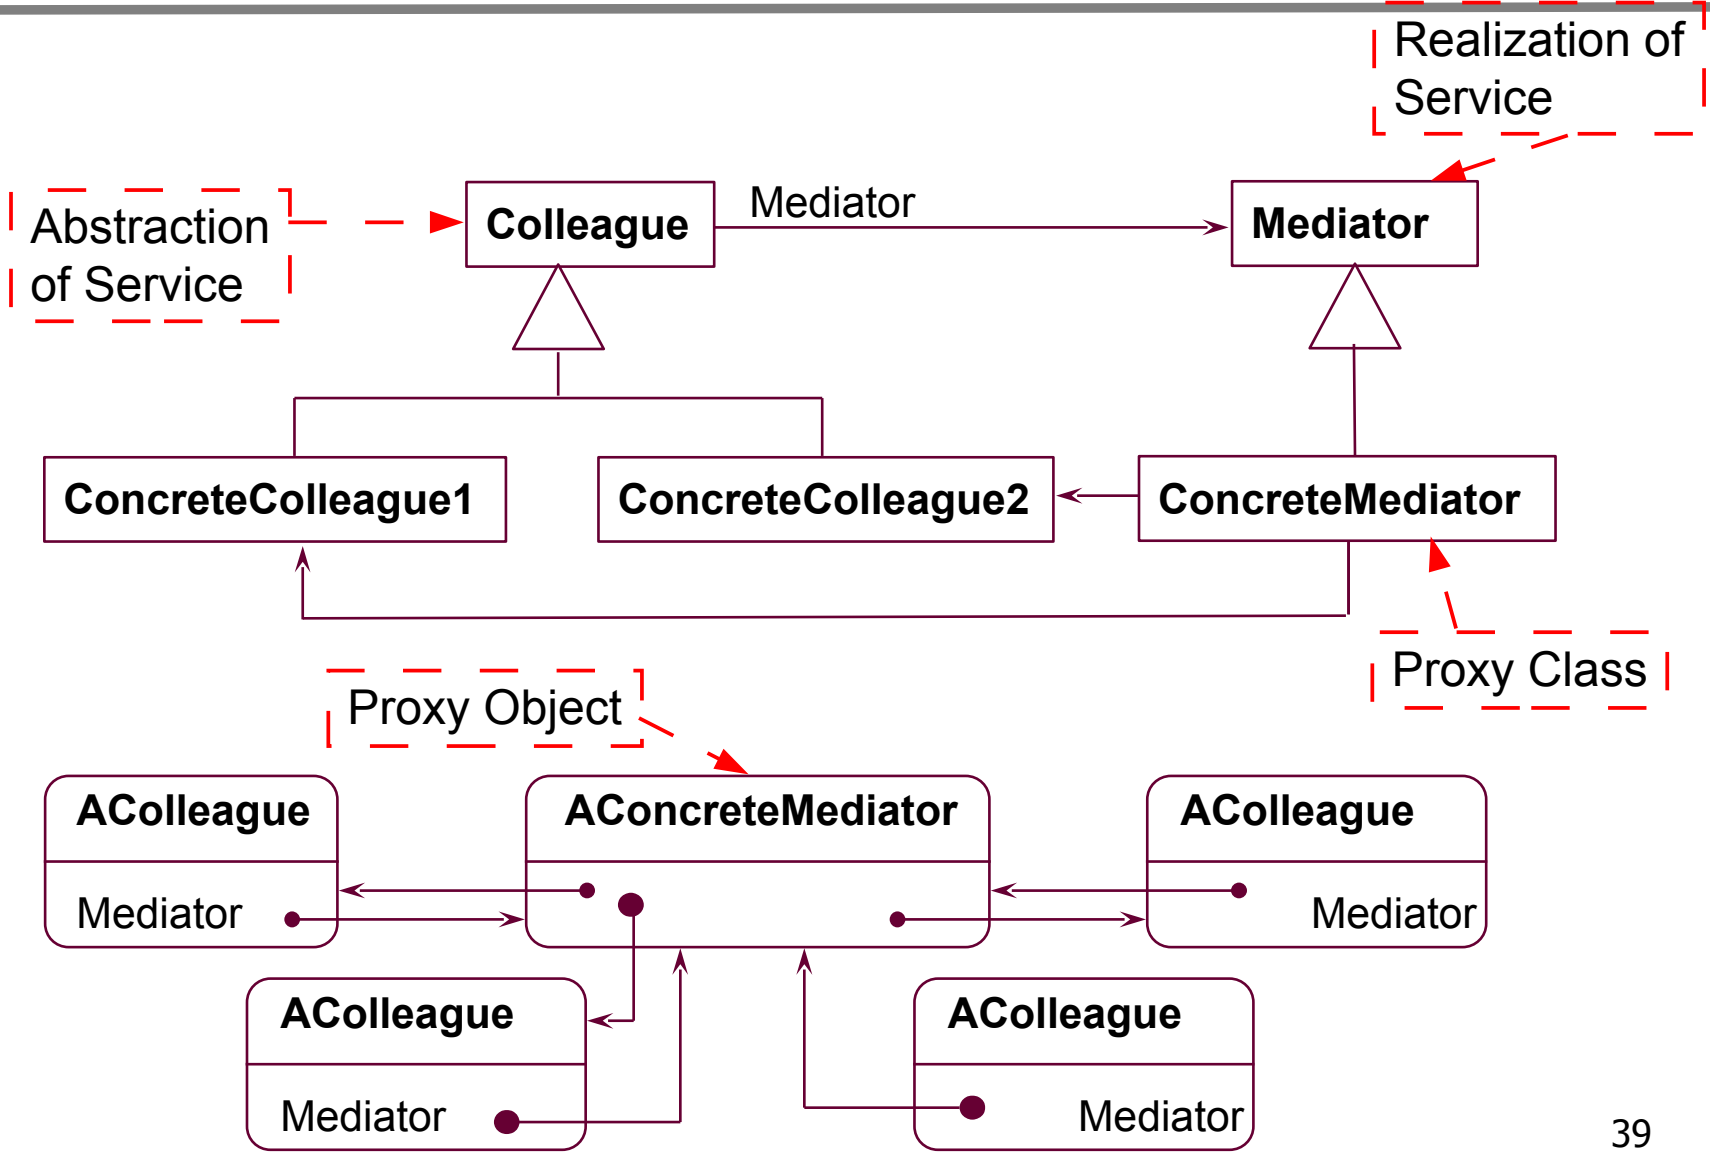


# Intent of Mediator

- ▶ Proxy object hides all communication partners
  - Every partner uses the mediator object as proxy
  - Clear: real partner is hidden
- ▶ Bridge links both communication partners
  - Both mediator and partner hierarchies can be varied
- ▶ ObserverWithChangeManager combines Observer with Mediator



# Web Service Brokers

- Communication between Web services can be mediated via a broker object (aka object request broker, ORB)

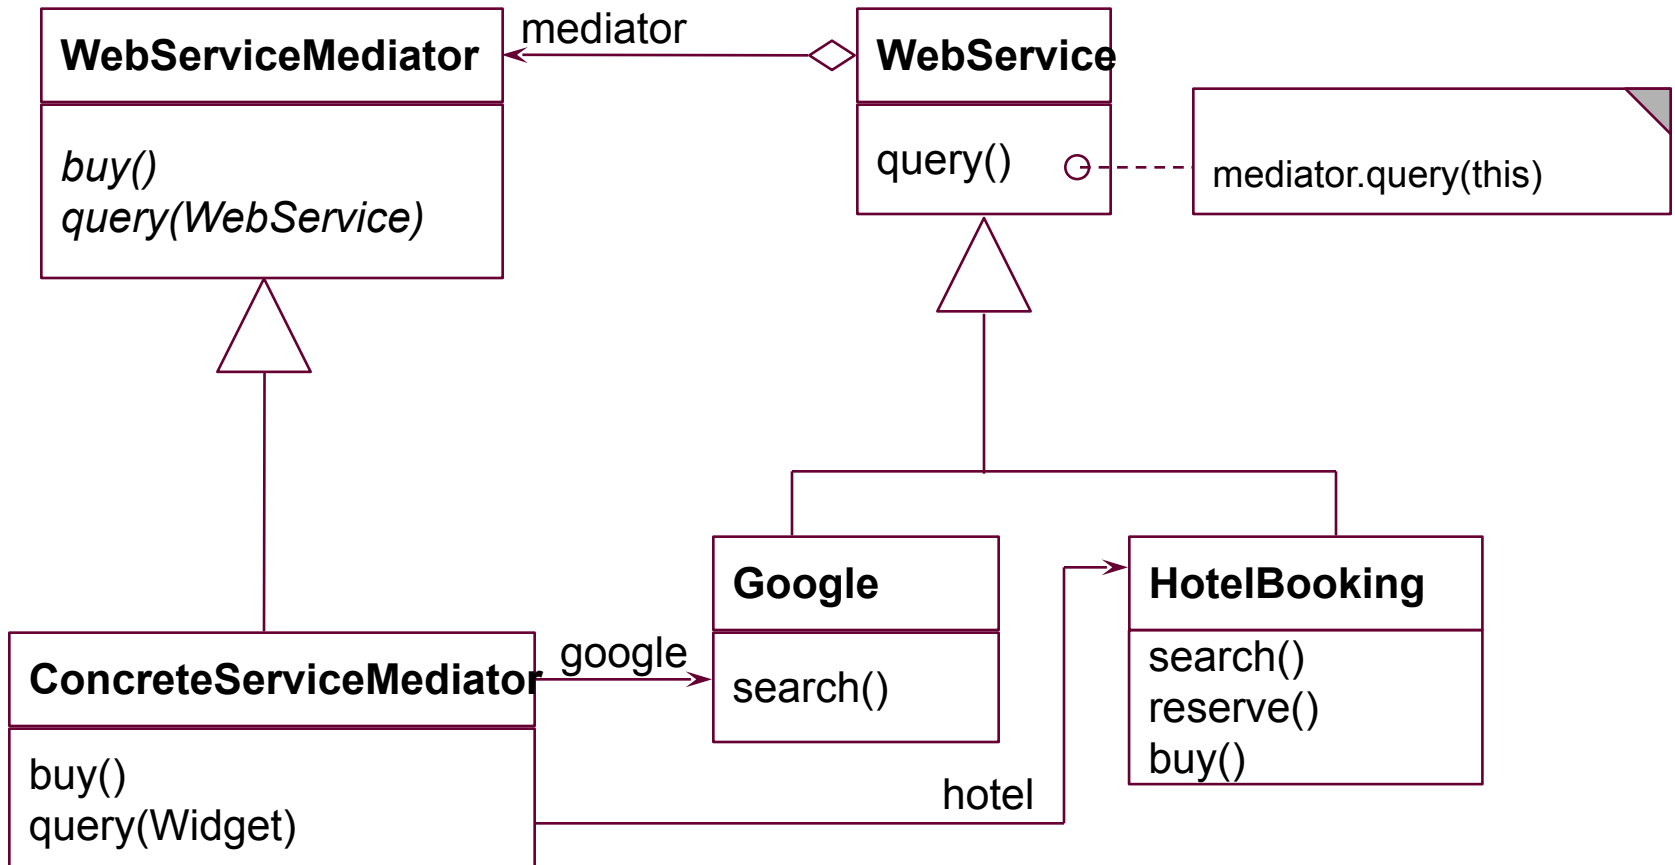



## 5.7 Coupling Tools with the Repository Connector Pattern


A recent answer...

# Coupling of Tools via Repositories

- ▶ How can two tools collaborate that did not know of each other?
- ▶ Answer: by coupling their repositories
  - Choose a master and a slave tool
  - Choose a master repository
  - Shadow the master repository in the slave repository
- ▶ Consequence: all data lies in slave repository, and can be worked on by slave *and* master


# Coupling of Repositories with “RepositoryConnector”

- ▶ [Stölzel 2005] connects two repositories of tools with lazy indirection proxies

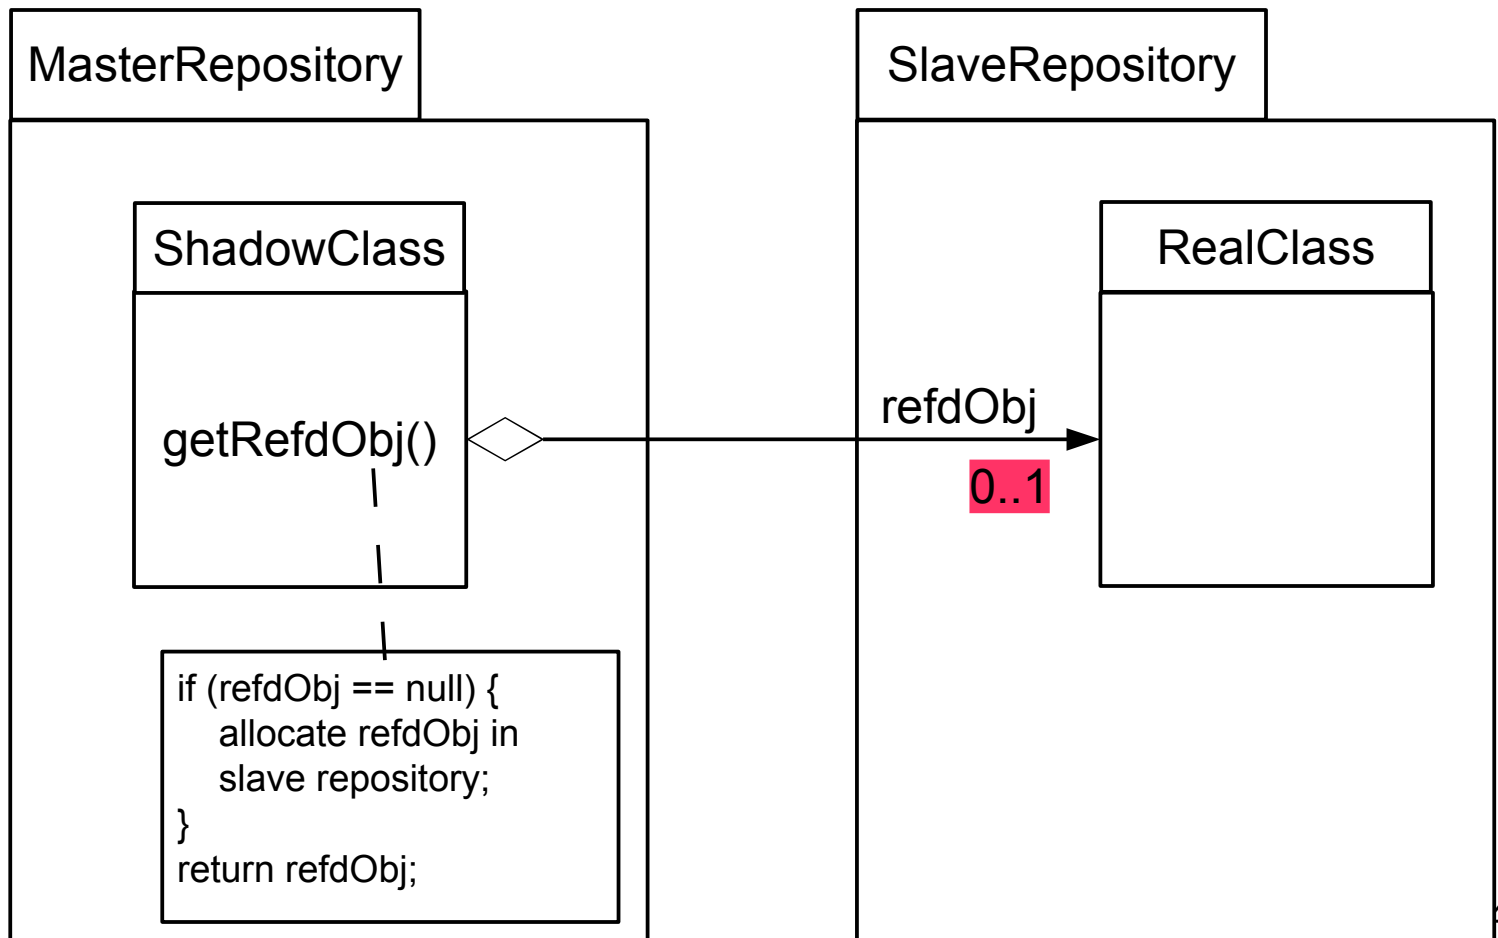

# Coupling of Repositories with “RepositoryConnector”

- ▶ On demand, objects of *real classes* in the master repository are created in the slave repository
- ▶ Service demands on the master repository are always delegated to the slave repository

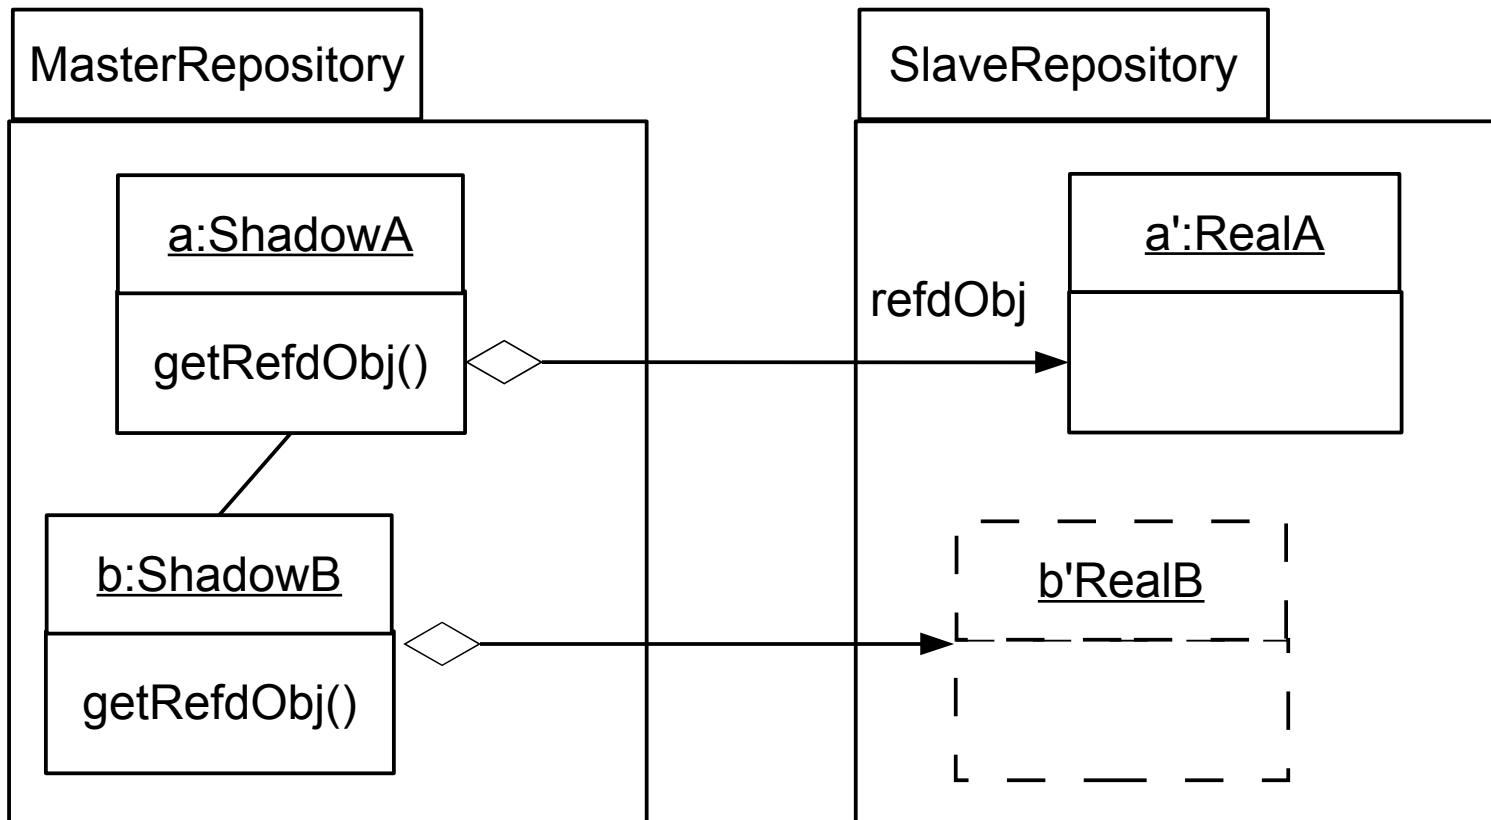

# Summary

- ▶ Architectural mismatch between components and tools consists of different assumptions about components, connections, architecture, and building procedure
- ▶ Design patterns, such as extensibility patterns or communication patterns, can bridge architectural mismatches
  - Data mismatch
  - Interface mismatch
  - Protocol mismatch
- ▶ Coupling two tools that had not been foreseen for each other is possible with lazy indirection proxies (RepositoryConnector)
- ▶ With Glue Patterns, reuse of COTS becomes much better

# The End

