

11b) Classical Component Systems – CORBA

Prof. Dr. Uwe Aßmann
Florian Heidenreich
Technische Universität Dresden
Institut für Software- und
Multimediatechnik
<http://st.inf.tu-dresden.de>
11-02, Mai 4, 2011



1. Basic mechanisms for modularity, exchangability, adaptation, transparency
2. Composition technique (connections)
 1. Dynamic Call
 2. Traded Call
3. Evaluation according to our criteria list
4. CORBA Services
5. CORBA Facilities

CBSE, © Prof. Uwe Aßmann

1

Literature

- ▶ R. Orfali, D. Harkey: Client/Server programming with Java and Corba. Wiley&Sons. easy to read.
- ▶ R. Orfali, D. Harkey, J. Edwards: Instant Corba. Addison-Wesley.
- ▶ CORBA. Communications of the ACM, Oct. 1998. All articles. Overview on CORBA 3.0.
- ▶ CORBA 3.1 specification: <http://www.omg.org/spec/CORBA/3.1/>
- ▶ Jens-Peter Redlich, CORBA 2.0 / Praktische Einführung für C++ und Java. Verlag: Addison-Wesley, 1996. ISBN: 3-8273-1060-1



Obligatory Reading

- ▶ ISC, 3.1-3.3
- ▶ Szyperski 2nd edition, Chap 13
- ▶ <http://java.sun.com/javase/6/docs/technotes/guides/idl/>
- ▶ <http://java.sun.com/developer/technicalArticles/releases/corba/>



Prof. U. Aßmann, CBSE

2

The CORBA Vision

One Repository to register them all,
One Repository to find them,
One Repository to start them all,
and with IIOP bind them
In the land of CORBA where the objects lie.

(J. Siegel, after J.J.R. Tolkien)



Prof. U. Aßmann, CBSE

3



Prof. U. Aßmann, CBSE

4

11b.1 Basic Mechanisms



CBSE, © Prof. Uwe Aßmann

5

CORBA

- ▶ Common Object Request Broker Architecture®
- ▶ Founding year of the OMG (object management group) 1989
- ▶ Goal: plug-and-play components everywhere

- ▶ Corba 1.1 1991 (IDL, ORB, BOA)
- ▶ ODMG-93 (Standard for OO-databases)
- ▶ Corba 2.0 1995, later 2.2 and 2.4
- ▶ Corba 3.0 1999

Prof. U. Aßmann, CBSE

6

Ingredients of CORBA

- ▶ Component Model
 - Components are classes and objects, i.e., similar to object-oriented software
 - . In CORBA 3.0, the CCM has additionally been introduced
 - Components have more component secrets
 - . Language interoperability by uniform interface description
 - . Location transparency
 - . Name transparency
 - . Transparent network protocols
 - Standardization
 - . CORBA Services
 - . CORBA Facilities
 - Horizontal vs. vertical
- ▶ Composition Techniques
 - Adaptation by stubs and skeletons
 - CORBA MOF for metamodelling




Prof. U. Aßmann, CBSE

7


OMA (Object Management Architecture)

- ▶ A software bus, based on the Mediator (Broker) design pattern
 - Coupled by decorator-connectors


Application Interfaces




Domain Interfaces



Common Facilities



Object Request Broker

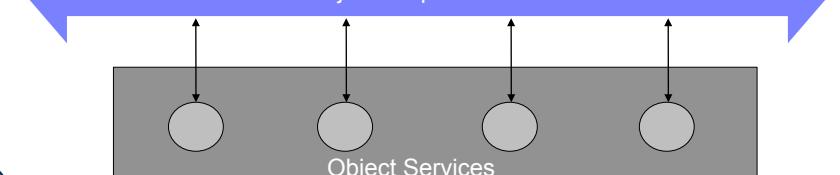

Prof. U. Aßmann, CBSE


8

Corba's Hydrocephalus

- ▶ Corba is large
 - Object Request Broker – 2000 pages of specification
 - Object Services – 300 pages
 - Common Facilities – 150 pages
- ▶ Technical reasons
 - Clean detailed solution
 - Sometimes overkill
- ▶ Sociologic reasons
 - OMG is large (over 800 partners) and heterogenic
 - Standard covers a wide rage
- ▶ Linguistic reasons
 - Tons of unintuitive 3-capitals-names (OMG, ORB, IDL, ...)




The Top Class CORBA::Object

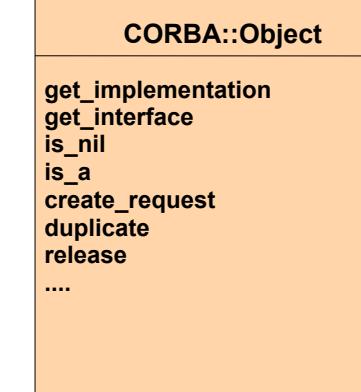

- ▶ The class CORBA::Object defines a component model
 - The class must be inherited to all objects in the application
- ▶ CORBA supports reflection and introspection:
 - get_interface delivers a reference to the entry in the interface repository
 - get_implementation a reference to the implementation
- ▶ Reflection works by the interface repository (list_initial_references from the CORBA::ORB interface).

Problem: Multiple Inheritance of CORBA Object

- ▶ CORBA::Object includes code into a class
- ▶ Many languages only offer only single inheritance
 - Application super class must be a delegatee
 - Could be solved by mixin inheritance (mixin layers)

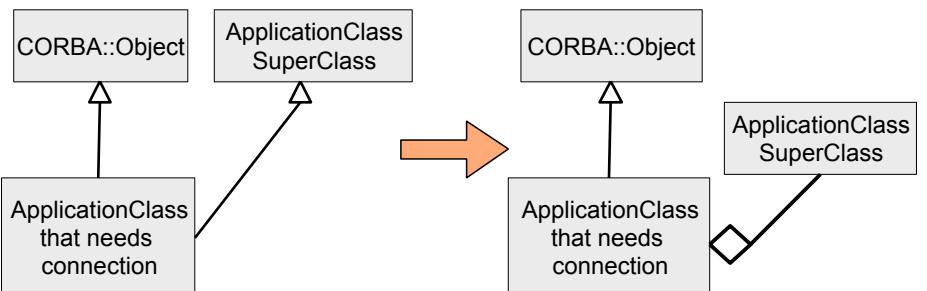

11b.2 Composition Technique of CORBA (Basic CORBA Connections)





Basic Connections in CORBA

- ▶ CORBA composes components with connections
 - Static method call with static stubs and skeletons
 - . Local or remote
 - Polymorphic call
 - . Local or remote
 - Event transmission
 - Callback (simplified Observer pattern)
 - Dynamic invocation (DII, request brokering)
 - . Searching services dynamically in the web (location transparency of a service)
 - Trading
 - . Find services in a yellow pages service, based on properties



Static CORBA Call

- ▶ Advantage: methods of the participants are statically known
 - Indirect call by stub and skeletons, without involvement of an ORB
 - Supports distribution (exchange of local call in one address space to remote call is very easy)
 - . Inherit from CORBA class
 - . Write an IDL spec
 - No search for service objects, rather fast
 - Better type check, since the compiler knows the involved types
- ▶ The call goes through the server object adapter (server decorator)
 - Basic (server) object adapter (BOA)
 - Portable (server) object adapter (POA)
 - This hides the whether the server is transient or persistent




Basic Object Adapter BOA

```
CORBA::BOA
create
get_id
dispose
set_exception
impl_is_ready
obj_is_ready
change_implementation
deactivate_impl
deactivate_obj
```


- ▶ The BOA hides
 - Life time of the server object (activation: start, stop)
 - Persistency
- ▶ The BOA is implemented in every ORB, for minimal service provision
- ▶ The BOA maintains an implementation repository (component registry)
- ▶ It supports non-object-oriented code
- ▶ The BOA is a real adapter (no decorator)



Server Site

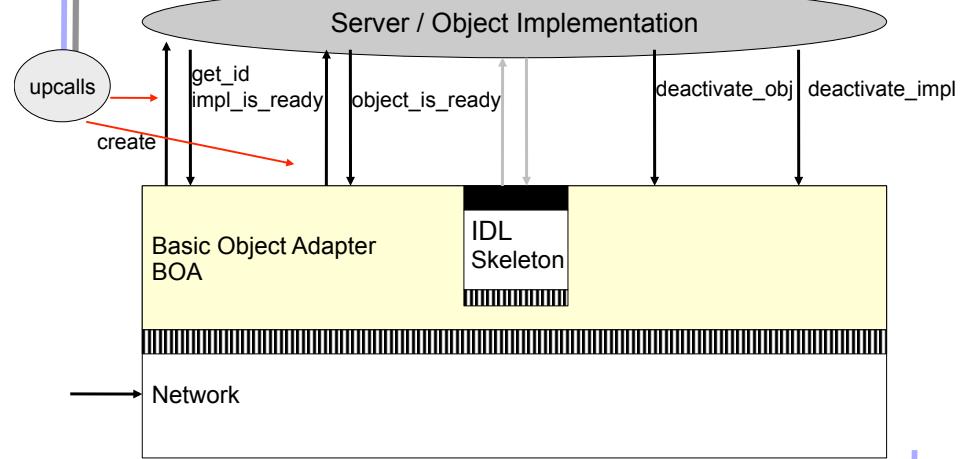


Object Activation on the Server through a BOA

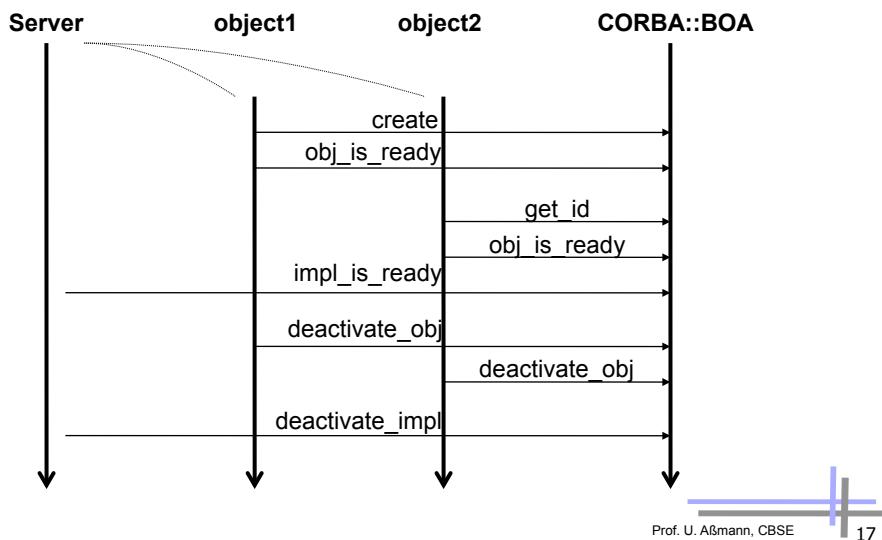

Object Adapters Support Different Server Life-Time Models

- ▶ **Common server process (shared server)**
 - Several objects reside in one process on the server; the BOA initializes them as threads with common address space (common apartment)
 - deactivate_impl, impl_is_ready, obj_is_ready are mapped directly to thread functions
 - ▶ **Separate server process (unshared server)**
 - For every object an own process
 - ▶ **Server-per-request (session server)**
 - Every request generates a new process
 - Similar to Session EJB
 - ▶ **Persistent server**
 - Another application stores the objects (e.g., a data base).
 - The BOA passes on the queries
 - Similar to Entity Bean


Portable Object Adapter POA

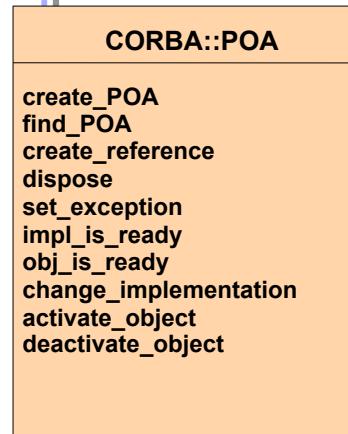

- ▶ The POA is a evolution of the BOA in CORBA 3.0
 - One per server, serving many objects
 - Nested POAs possible, with nested name spaces
 - ▶ User policies for object management
 - User-written instance managers for management of object instances

Callback Connectors with the Callback Service

- ▶ The Callback pattern is a simplified Observer pattern
 - Registration and notification, but not status update
 - ▶ Callback function registration
 - Register a procedure variable, a closure (procedure variable with arguments), or a reference to an object at the subject, the server
 - ▶ Callback works for all languages, not only object-oriented ones

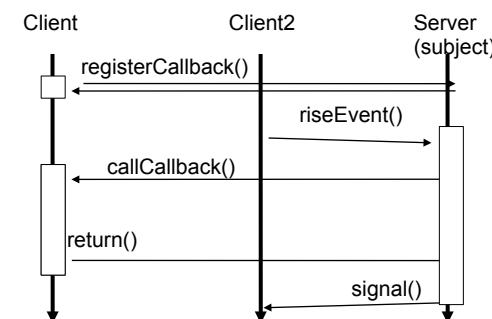

Event Connections

- ▶ Most flexible way of communication (also called messages)
 - Asynchronous communication
 - Works for every CORBA language
- ▶ Receiver models
 - **Unicast**: one receiver
 - **Multicast**: many receivers
 - **Dynamically varying receivers**
- ▶ **Push model:** PushConsumer/PushSupplier: object delivers event with push, event is shipped automatically
- ▶ **Pull model:** PullSupplier/PullConsumer: object waits for event with pull
 - Synchronous or asynchronous
 - Untyped generic events, or typed by IDL
- ▶ **Event channels** as intermediate buffers
 - Channels buffer, filter, and map of pull to push
 - Advantage:
 - Asynchronous Working in the Web (with IIOP and dynamic Call)
 - Attachment of legacy systems interesting for user interfaces, network computing etc.
 - Disadvantage: Very general interface

Prof. U. Aßmann, CBSE

21



Dynamic Call Connector (Request Broking)

- ▶ CORBA *dynamic call* is a *symbolic call*, i.e., a reflective call with a symbolic name and arguments
 - Without knowing that the service exists
 - Services can be dynamically exchanged, brought into the play a posteriori
 - Without recompilation of clients, nor regeneration of stubs
 - Binding of names to addresses is dynamic
- ▶ Requires descriptions of semantics of service components
 - For identification of services
 - Metadata (descriptive data): catalogues of components (interface repository, implementation repository)
 - Property service (later)
- ▶ and a mediator, that looks for services: the ORB

Prof. U. Aßmann, CBSE

23



11b.2.1 Dynamic Call Connector (Request Broking)



CBSE, © Prof. Uwe Aßmann

22

Object Request Broker (ORB)

CORBA::ORB

```
init
object_to_string
string_to_object
BOA_init
list_initial_services
resolve_initial_references
get_default_context
create_environment
....
```

- ▶ For a dynamic call, the ORB must be involved
- ▶ The ORB is a *mediator* (design pattern) between client and server
 - Hides the environment from clients
 - Can talk to other ORBs, also on the web



Prof. U. Aßmann, CBSE


24

Prof. U. Aßmann, CBSE

23




ORB Activation

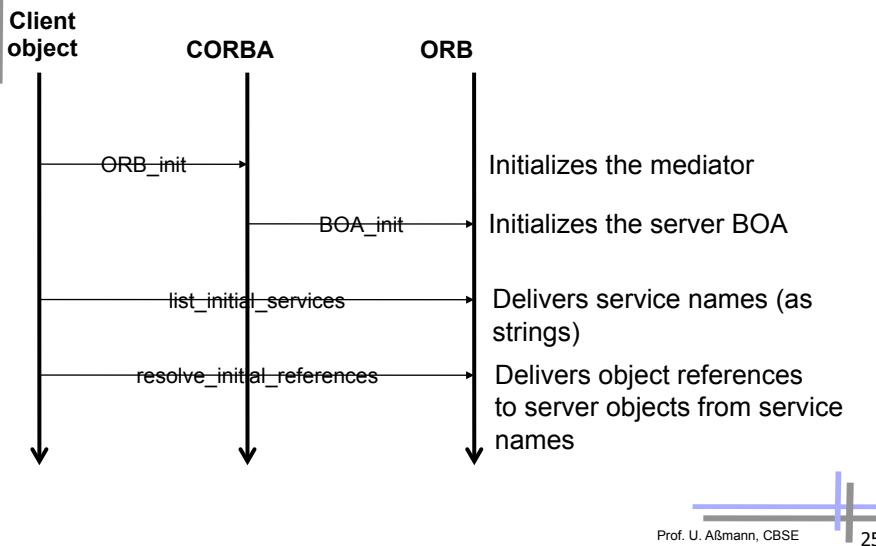


Requesting a Service via the ORB

- ▶ Reflective calls
 - Building a call object (Request)
 - Adding arguments
 - Invoking
 - Polling, reading

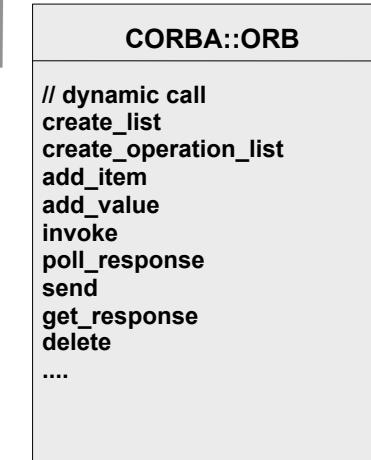

Protocol of Dynamic Call (DII)

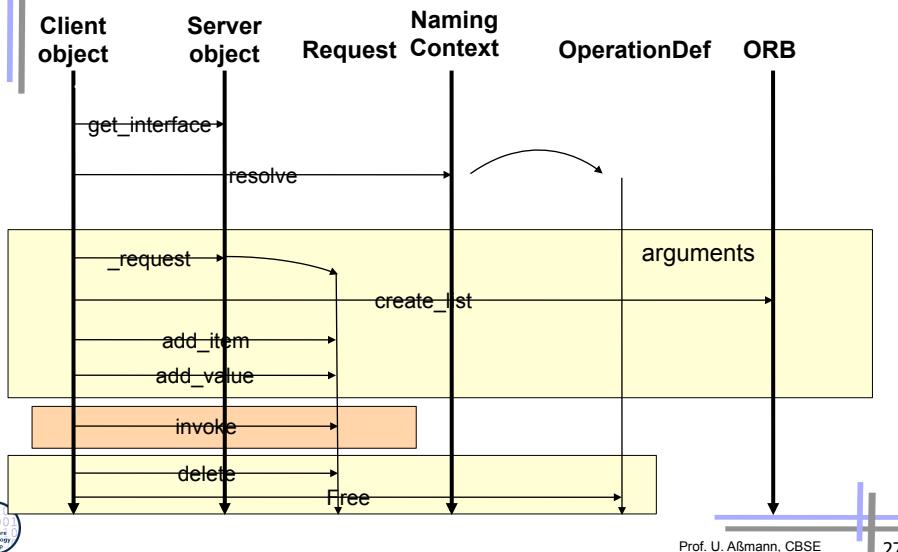

Example Dynamic Call in C++

```

// Wow, a complex protocol!!
CORBA::Request_ptr rq= obj->_request("op");
// Create argument list
rq->arguments() = orb->create_list();
rq->arguments()->add_value("arg1",val1,CORBA::ARG_IN);
rq->arguments()->add_value("arg2",val2,CORBA::ARG_OUT);
rq->arguments()->add_value("arg3",val3,CORBA::ARG_INOUT);
// Start request (synchronously)
cout << "start request" << endl;

rq->invoke();
// analyze result
CORBA::Short rs1;
if ("(rq->result()->value()) >> rs1) {
  // Analyze the out/inout-parameters (arg1 has index 0)
  CORBA::Short _arg2,_arg3;
  *(rq->arguments()->item(1)->value()) >> _arg2;
  *(rq->arguments()->item(2)->value()) >> _arg3;
  cout << "arg2=" << _arg2 << " arg3=" << _arg3
  << " return=" << rs1 << endl;
} else {
  cout << "result has unexpected type" << endl;
}
  
```

DII Invocation in Java (1)

```
// Client.java
// Building Distributed Object Applications with CORBA
// Infowave (Thailand) Co., Ltd.
// http://www.waveman.com
// Jan 1998
public class Client {
    public static void main(String[] args) {
        if (args.length != 2) {
            System.out.println("Usage: vbj Client <carrier-name> <aircraft-name>");
            return;
        }
        String carrierName = args[0];
        String aircraftName = args[1];
        org.omg.CORBA.Object carrier = null;
        org.omg.CORBA.Object aircraft = null;
        org.omg.CORBA.ORB orb = null;
        try {
            orb = org.omg.CORBA.ORB.init(args, null);
        }
        catch (org.omg.CORBA.systemsXception se) {
            System.err.println("ORB init failure " + se);
            System.exit(1);
        }
    }
}
```



DII Invocation in Java (2)

```
{ // scope
try {
    carrier = orb.bind("IDL:Ship/AircraftCarrier:1.0",
                        carrierName, null, null);
} catch (org.omg.CORBA.systemsXception se) {
    System.err.println("ORB init failure " + se);
    System.exit(1);
}
org.omg.CORBA.Request request = carrier._request("launch");
request.add_in_arg().insert_string(aircraftName);
request.set_return_type(org.orb.get_pwiwithive_tc(
    org.omg.CORBA.TCKind.tk_objref));
request.invoke();
aircraft = request.result().value().extract_Object();
}
{ // scope
org.omg.CORBA.Request request = aircraft._request("codeNumber");
request.set_return_type(org.orb.get_pwiwithive_tc(
    org.omg.CORBA.TCKind.tk_string));
request.invoke();
String designation = request.result().value().extract_string();
System.out.println("Aircraft " + designation + " is coming your way");
}
```



Server Implementation

```
// Building Distributed Object Applications with CORBA
// Infowave (Thailand) Co., Ltd.
// http://www.waveman.com
// Jan 1998
public class Server {
    public static void main(String[] args) {
        org.omg.CORBA.ORB orb = null;
        try {
            orb = org.omg.CORBA.ORB.init(args, null);
        } catch (org.omg.CORBA.systemsXception se) {
            System.err.println("ORB init failure " + se);
            System.exit(1);
        }

        org.omg.CORBA.Boa boa = null;
        try {
            boa = orb.Boa_init();
        } catch (org.omg.CORBA.systemsXception se) {
            System.err.println("BOA init failure " + se);
            System.exit(1);
        }

        Ship.AircraftCarrier carrier =
            new AircraftCarrierImpl("Nimitz");
        try {
            boa.obj_is_ready(carrier);
        } catch (org.omg.CORBA.systemsXception se) {
            System.out.println("Object Ready failure " + se);
            System.exit(1);
        }
        System.out.println(carrier + " ready for launch !!!");

        try {
            boa.impl_is_ready();
        } catch (org.omg.CORBA.systemsXception se) {
            System.out.println("Impl Ready failure " + se);
            System.exit(1);
        }
    }
}
```



Example: Time Server in Java

- ▶ On one machine; 2 address spaces (processes)
- ▶ Call provides current time
- ▶ Contains
 - IDL
 - Server
 - . Starts ORB
 - . Initializes Service
 - . Gives IOR to the output
 - Client
 - . Takes IOR
 - . Calls service

```
// TestTimeServer.idl
module TestTimeServer{
    interface ObjTimeServer{
        string getTime();
    };
}
```



Service Component

```
// TestTimeServerImpl.java - Server Skeleton
import CORBA.*;
class ObjTestTimeServerImpl extends
    TestTimeServer.ObjTimeServer_Skeleton { // generated from IDL
    // Variables
    // Constructor
    // Method (Service) Implementation
    public String getTime() throws CORBA.SystemException {
        return "Time: " + currentTime;
    }
};
```



Server Implementation

```
// TimeServer_Server.java
import CORBA.*;
public class TimeServer_Server{
    public static void main(String[] argv){
        try {
            CORBA.ORB orb = CORBA.ORB.init();
            ...
            ObjTestTimeServerImpl obj =
                new ObjTestTimeServerImpl(...);
            ...
            System.out.println(orb.object_to_string(obj));
        }
        catch (CORBA.SystemException e){
            System.err.println(e);
        }
    }
};
```



Client Implementation (Simpler Protocol)

```
// TimeServer_Client.java
import CORBA.*;
public class TimeServer_Client{
    public static void main(String[] argv){
        try {
            CORBA.ORB orb= CORBA.ORB.init();
            ...
            CORBA.object obj = orb.string_to_object(argv[0]);
            ...
            TestTimeServer.ObjTimeServer timeServer =
                TestTimeServerImpl.ObjTimeServer_var.narrow(obj);
            ...
            System.out.println(timeServer.getTime());
        }
        catch (CORBA.SystemException e){
            System.err.println(e);
        }
    }
};
```



Execution

```
// starting server
C:\> java TimeServer_Server
IOR:00000000000122342435 ...

// starting client
C:\> java TimeServer_Client IOR:00000000000122342435 ...

Time: 14:35:44
```



- ▶ **Java-based**
 - IBM WebSphere
 - IONA Orbix: In Java, ORBlets possible
 - BEA WebLogic
 - Visibroker (in Netscape)
 - Voyager (ObjectSpace) (with Mobile Agents)
 - free: JacORB, ILU, Jorba, DynaORB
- ▶ **C-based**
 - ACE ORB TAO, University Washington (with trader)
 - Linux ORBIT (gnome)
 - Linux MICO
- ▶ **Python-based**
 - fnorb
- ▶ <http://www.omg.org>


11b.2.2 Trader-Based Call

The foundation of service-oriented architecture (SOA)



Beyond Dynamic Call: Service Call with the Trader Service

- ▶ A service call is a call, not based on naming but on semantic attributes, published properties
 - Requires a yellow page directory of services
- ▶ Service-oriented architectures (SOA), requires matchmaking of services
 - The ORB resolves operations still based on naming (with the name service). The trader, however, resolves services without names, only based on properties and policies
- ▶ The trader gets offers from servers, containing new services

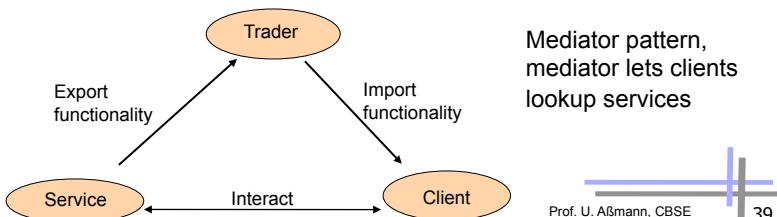

Service Offers for Trader

- ▶ Service offer (IOR with properties (metadata))
 - Properties describe services
 - Are used by traders to match services to queries
 - *not* facet-based, one-dimensional
- ▶ Dynamic property
 - A property can be queried dynamically by the trader of service
 - The service-object can determine the value of a dynamic property anew
- ▶ Matching with the standard constraint language
 - Boolean expressions about properties
 - Numeric and string comparisons




Traders Provide Service Hopping

- If a trader doesn't find a service, it calls neighbor traders

- Design pattern Chain of Responsibility


- Graph of traders

- Links to neighbors via TraderLink
- TraderLink filters queries and manipulate via policies

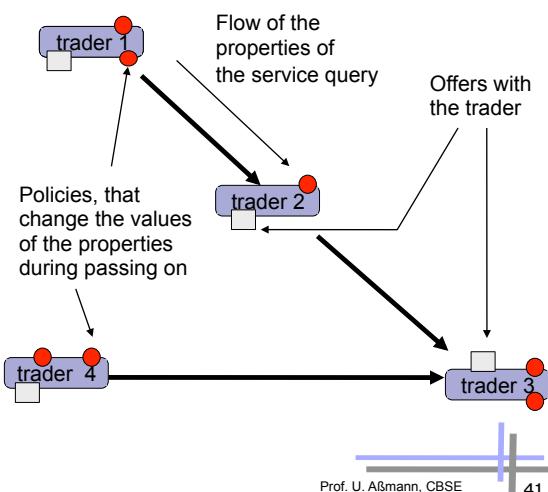

Modification of Queries

- Policies parameterize the behaviour of the traders and the TraderLinks
 - Filters, i.e., values, modifying the queries:
 - max_search_card: maximum cardinality for the ongoing searches
 - max_match_card: maximum cardinality for matchings
 - max_hop_count: cardinality search depth in the graph

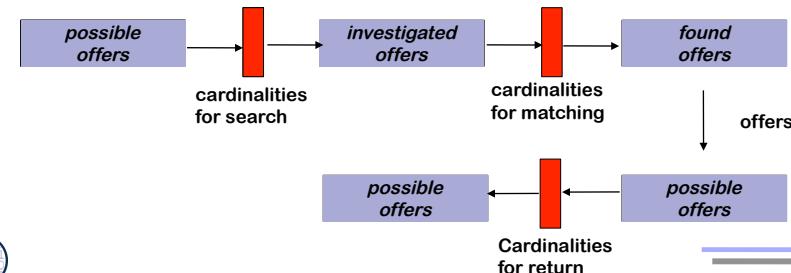

Interfaces Trading Service

- Basic interfaces
 - Lookup (query)
 - Register (for export, retract, import of services)
 - Admin (info about services)
 - Link (construction of trader graph)







- How does a lookup query look like?

```
Lookup.Query(in Servicename, in Constraint,
             in PolicySeq, in SpecifiedProperties,
             in howTo, out OfferSequence, offerIterator)
```

- Unfortunately, no faceted matchmaking possible!



CORBA Trader Types



Corba 3.0

- ▶ Provides the well-defined packaging for producing components
 - CORBA Component Model (CCM): similar to EJB
- ▶ Message Service MOM: Objects have asynchronous buffered message queues
- ▶ Language mappings avoid IDL
 - ▶ Generating IDL from language specific type definitions
 - ▶ C++2IDL, Java2IDL, ...
- ▶ XML integration (SOAP messages)
- ▶ Scripting (CORBA script), a composition language



Component Model

- ▶ Mechanisms for secrets and transparency: very good
 - Interface and Implementation repository
 - Component language hidden (interoperability)
 - Life-time of service hidden
 - Identity of services hidden
 - Location hidden
- ▶ No parameterization
- ▶ Standardization: quite good!
 - Services, application services are available
 - On the other hand, some standards are FAT
 - Technical vs. application specific vs business components:
 - .. but for business objects, the standards must be extended (vertical facilities) (that's where the money is)



11b.3 Evaluation of CORBA

as composition system



Composition Technique

- ▶ Mechanisms for connection
 - Mechanisms for adaptation
 - . Stubs, skeletons, server adapters
 - Mechanisms for glueing: marshalling based on IDL
- ▶ Mechanisms for aspect separation
 - Multiple interfaces per object
 - . Facade classes/objects (design pattern facade)
- ▶ Nothing for extensions
- ▶ Mechanisms for meta-modeling
 - Interface Repositories with type codes
 - Implementation repositories
 - Dynamic call and traded call are reflective and introspective
- ▶ Scalability
 - Connections cannot easily be exchanged (except static local and remote call)






Composition Language

- Weak: CORBA scripting provides the facility to write glue code, but only black-box composition



CORBA

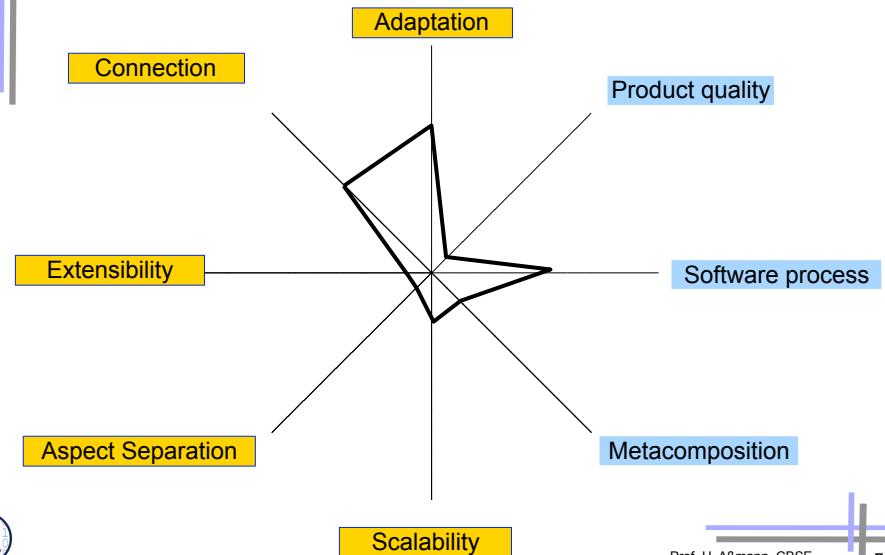

11b.4 Corba Services



Literature

- OMG. CORBA services: Common Object Service Specifications. <http://www.omg.org>.
- OMG: CORBAfacilities: Common Object Facilities Specifications.



(optional material)



Overview on Corba Services

- ▶ Services provide functionality a programming language might not provide (e.g, Cobol, Fortran)
- ▶ 16+ standardized service interfaces (i.e., a library)
 - Standardized, but status of implementation different depending on producer
- ▶ Object services
 - Deal with features and management of objects
- ▶ Collaboration services
 - Deal with collaboration, i.e., object contexts
- ▶ Business services
 - Deal with business applications
- ▶ The services serve for criterion M-3, standardization. They are very important to increase reuse.
 - Remember, they are available for every language, and on distributed systems!



Object Services: Rather Simple

- ▶ Name service (directory service)
 - Records server objects in a simple tree-like name space
 - (Is a simple component system itself)
- ▶ Lifecycle service (allocation service)
 - Not automatic; semantics of deallocation undefined
- ▶ Property service (feature service for objects)
- ▶ Persistency service (storing objects in data bases)
- ▶ Relationship service to build interoperable relations and graphs
 - Support of standard relations reference, containment
 - Divided in standard roles contains, containedIn, references, referenced
- ▶ Container service (collection service)

Collaboration Services

- ▶ Communication services
 - Resemble connectors in architecture systems, but cannot be exchanged to each other
 - Event service
 - . push model: the components push events into the event channel
 - . pull model: the components wait at the channel and empty it
 - Callback service
- ▶ Parallelism
 - Concurrency service: locks
 - Object transaction service, OTS: Flat transactions on object graphs
 - . Nested transactions?




Business Services

- ▶ Trader service
 - Yellow Pages, localization of services
- ▶ Query service
 - Search for objects with attributes and the OQL, SQL (ODMG-93)
- ▶ Licensing service
 - For application providers (application servers)
 - License managers
- ▶ Security service
 - Use of SSL and other basic services



Dependencies Between the Services

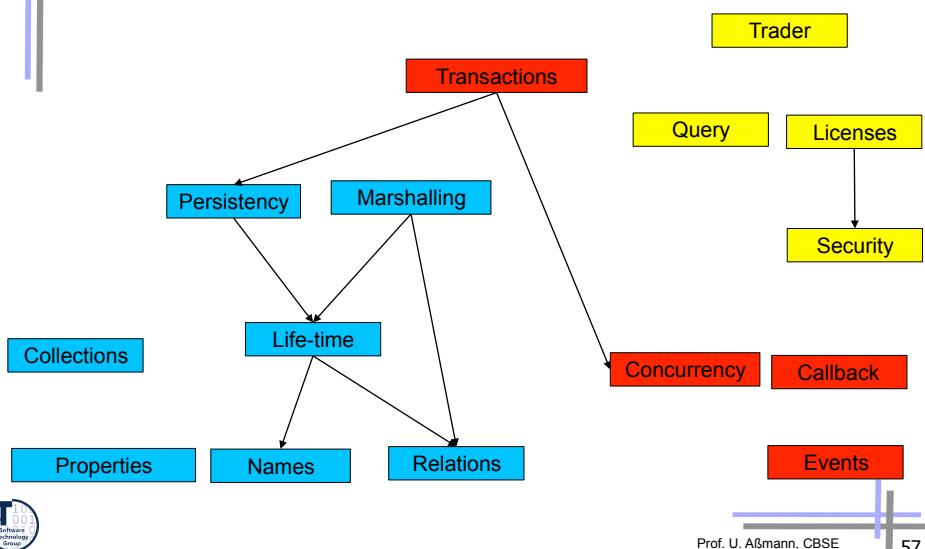

Prof. U. Aßmann, CBSE

57



Object Services: Names

- ▶ Binding of a name associates a name to an object in a name space (directory, scope, naming context)
 - A name space is an associative array with a set of bindings of names to values
 - Namespaces are recursive, i.e., they can reference each other and build name graphs
 - Others: Active Directory, LDAP
- ▶ The representation of a name is based on abstract syntax, not on the concrete syntax of a operating system or URL.
 - A name consists of a tuple (Identifier, Kind).
 - The identifier is the real name, the Kind tells how the name is represented (e.g., c_source, object_code, executable, postscript,...).
 - For creation of names there is a library (design pattern Abstract Factory).

Prof. U. Aßmann, CBSE

58



Name Service CosNaming

```

CosNaming::NamingContext
bind(in Name n, in Object obj) // associate a name
rebind(in Name n, in Object obj)
bind_context
rebind_context
mk_name(String s)
Object resolve
unbind(in Name n) // disassociate a name
NamingContext new_context;
NamingContext bind_new_context(in Name n)
void destroy
void list(..)
_narrow()
    
```



Prof. U. Aßmann, CBSE

59



Name Service

```

void bind(in Name n, in Object obj)
    raises(NotFound, CannotProceed, InvalidName, AlreadyBound);
void rebind(in Name n, in Object obj)
    raises(NotFound, CannotProceed, InvalidName );
void bind_context(in Name n, in NamingContext nc)
    raises(NotFound, CannotProceed, InvalidName, AlreadyBound );
void rebind_context(in Name n, in NamingContext nc)
    raises(NotFound, CannotProceed, InvalidName );
Name mk_name(String s);
Object resolve(in Name n)
    raises(NotFound, CannotProceed, InvalidName );
void unbind(in Name n)
    raises(NotFound, CannotProceed, InvalidName );
NamingContext new_context();
NamingContext bind_new_context(in Name n)
    raises(NotFound, AlreadyBound, CannotProceed, InvalidName );
void destroy()
    raises(NotEmpty);
void list(in unsigned long how_many,
        out BindingList bl, out BindingDescriptor bi );
    
```



Prof. U. Aßmann, CBSE

60



Name Service in IDL

```
module CosNaming{
    struct NameComponent {
        string id;
        string kind;
    };
    typedef sequence <NameComponent> Name;

    enum BindingType { nobject, ncontext };
    struct Binding {
        Name binding_name;
        BindingType binding_type;
        // methods see previous slide
    };
    typedef sequence <Binding> BindingList;

    interface BindingIterator;
    interface NamingContext {
        enum NotFoundReason { missing_node,
            not_context, not_object };
        exception NotFound {
            NotFoundReason why;
            Name rest_of_name;
        };
    };
}
...
```



Name Service: Example

```
// From: Redlich

import java.io.*;
import java.awt.*;
import IE.Iona.Orbix2.CORBA.SystemException; // OrbixWeb
import CosNaming.NamingContext; // name service/context
import CosNaming.NamingContext.*; // name service/Exceptions
import Calc5.calc.complex; // Typ 'complex' from Calc5


class MyNaming extends CosNaming {
    ...
    try {
        ...
        ctxt= NamingContext._narrow( MyNaming.
            resolve_initial_references("MyNaming.NameService"));
    }
}

public class client extends Frame {
    private Calc5.calc.Ref calc;
    private TextField inR, inI;
    private Button setB, addB, multB,
        divB, quitB, zeroB;
    f = new client(cf.create_new_calc());
    f.pack();
    f.show();
}

public static void main(String argv[])
{
    ...
    CosNaming.NamingContext.Ref ctxt;
    Calc5.calc_factory.Ref cf;
    Frame f;
    ...
}
```



Use of Names

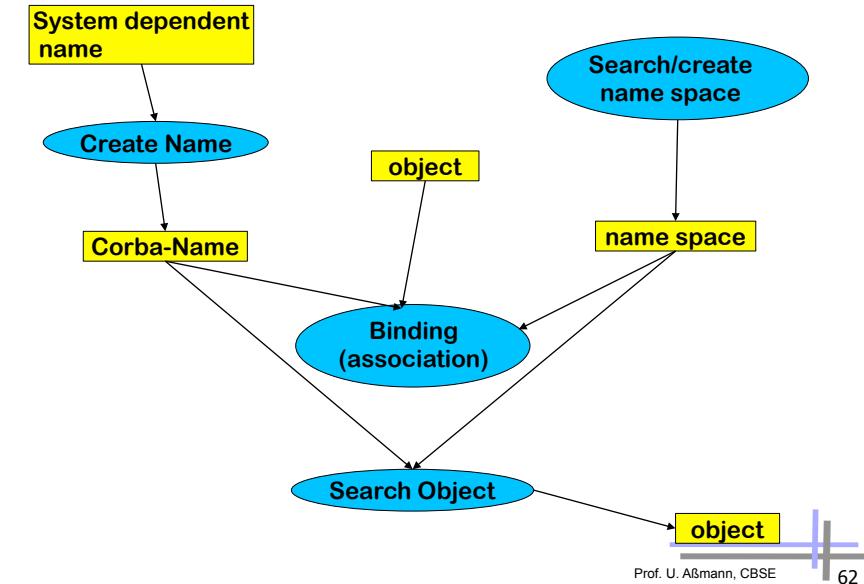

Object Services: Persistency

- ▶ Definition of a Persistent Object Identifier (PID)
 - references the value of CORBA-objects (in contrast to a CORBA-object)
- ▶ Interface
 - connect, disconnect, store, restore, delete
- ▶ Attachment to data bases possible (also ODMG compatible)





Object Services: Property Service

- ▶ Management of lists of features (properties) for objects
 - Properties are strings
 - Dynamically extensible
- ▶ Concept well-known as
 - LISP property lists, associative arrays, Java property classes
- ▶ Iterators for properties
- ▶ Interface:
 - define_property, define_properties, get_property_value, get_properties, delete_property,



Collaboration Services: Transactions

- ▶ What a dream: the Web as data base with nested transactions.
- ▶ Scenarios:
 - Accounts as Web-objects. Transfers as Transaction on the objects of several banks
 - Parallel working on web sites: how to make consistent?
- ▶ Standard 2-phase commit protocol:
 - begin_ta, rollback, commit
- ▶ Nested transactions
 - begin_subtransaction, rollback_subtransaction, commit_subtransaction

11b.5 CORBA Facilities (Standards for Application Domains)

Application domain specific interfaces



Horizontal Facilities

- ▶ User interfaces
 - Printing, Scripting
 - Compound documents: since 1996 OpenDoc is accepted as standard format. Source Code has been released of IBM
- ▶ Information management
 - Metadata(meta object facility, MOF)
 - Tool interchange: a text- and stream based exchangeformat for UML (XMI)
 - Common Warehouse Model (CWM): MOF-based metaschema for database applications

Vertical Facilities (Domain-Specific Facilities)

The Domain technology committee (DTC) creates domain task forces DTF for a application domain

- ▶ Business objects
- ▶ Finance/insurance
 - Currency facility
- ▶ Electronic commerce
- ▶ Manufacturing
 - Product data management enablers PDM
- ▶ Medicine (healthcare CorbaMed)
 - Lexicon Query Service
 - Person Identifier Service PIDS
- ▶ Telecommunications
 - Audio/visual stream control object
 - Notification service
- ▶ Transportation



Prof. U. Aßmann, CBSE

69

11b.6. CORBA and the Web



CBSE, © Prof. Uwe Aßmann

71

CORBA Facilities and UML Profiles

- ▶ Since 2000, the OMG describes domain-specific vocabularies with UML profiles
 - Probably, all CORBA facilities will end up in UML profiles
- ▶ A UML Profile is a UML dialect of a application specific domain
 - With new stereotypes and tagged values
 - Corresponds to an extension of the UML metamodel
 - Corresponds to a domain specific language with own vocabulary
 - Every entry in profile is a term
- ▶ Example UML Profiles:
 - EDOC Enterprise Distributed Objects Computing
 - Middleware profiles: Corba, .NET, EJB
 - Embedded and real time systems:
 - MARTE profile on schedulability, performance, time
 - Ravenscar Profile
 - HDOORS Profile on real-time modelling www.hidoors.org



Prof. U. Aßmann, CBSE

70

Corba and the Web

- ▶ HTML solves many of the CORBA problems
- ▶ HTTP only for data transport
 - HTTP cannot call methods, except by CGI-Gateway-functionality (common gateway interface)
 - Behind the CGI-interface is a general program, communicating with HTTP with untyped environment variables (HACK!)
 - http-Server are simple ORBs, pages are objects
 - The URI/URL-name schema can be integrated into CORBA
- ▶ IIOP becomes a standard internet protocol
 - Standard ports, URL-mappings and Standard-proxies for Firewalls are available
- ▶ CORBA is an extension of HTTP of data to code



Prof. U. Aßmann, CBSE

72




CORBA and Java

- ▶ Java is an ideal partner for Corba :
 - Bytecode is mobile, i.e.,
 - . Applets: move calculations to clients (thin/thick client problem)
 - . can be used for migration of objects, ORBs and agents
 - Since 1999 direct Corba support in JDK 1.2
 - . IDL2Java mapping, IDL compiler, Java2IDL compiler, name service, ORB
 - Corba supports for Java a distributed interoperable infrastructure
- ▶ Java imitates functionality of Corba
 - Basic services: Remote Method Invocation RMI, Java Native code Interface JNI
 - Services: serialization, events
 - Application specific services (facilities): reflection, properties of JavaBeans



Corba and the Web (Orblets)

- ▶ ORBs can be written as bytecode applets if they are written in Java (ORBlet)
- ▶ Coupling of HTTP and IIOP: Download of an ORBlets with HTTP: Talk to this ORB, to get contact to server
- ▶ Standard web services (see later) are slower than CORBA/ORBlets, because they incur interpretation overhead

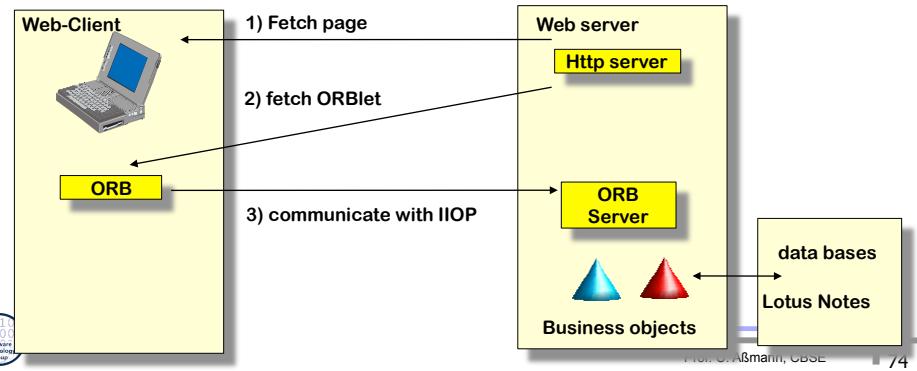

What Have We Learned

- ▶ CORBA is big, but universal:
 - The Corba-interfaces are very flexible, work and can be used in practice
 - .. but also complex and fat, may be too flexible
 - If you have to connect to legacy systems, CORBA works
- ▶ Corba has the advantage of an open standard
- ▶ To increase reuse and interoperability in practice, one has to learn *many* standards
- ▶ Trading and dynamic call are future advanced communication mechanisms
- ▶ CORBA was probably only the first step, but web services might be taking over



The End

