


25) Invasive Software Composition (ISC)

Prof. Dr. Uwe Aßmann
Florian Heidenreich
Technische Universität Dresden
Institut für Software- und
Multimediatechnik
<http://st.inf.tu-dresden.de>

Version 11-0.5, Juli 6, 2011

1. Invasive Software Composition -
A Fragment-Based Composition
Technique
2. What Can You Do With
Invasive Composition?
3. Functional and Composition
Interfaces
4. Different forms of grey-box
components
5. Evaluation as Composition
Technique



CBSE, © Prof. Uwe Aßmann

1

Obligatory Literature

- ISC book Chap 4
- www.the-compost-system.org
- www.reuseware.org



2



Other References


Jakob Henriksson. A Lightweight Framework for Universal Fragment Composition. Technische Universität Dresden, Dec. 2008
<http://nbn-resolving.de/urn:nbn:de:bsz:14-ds-1231251831567-11763>

Jendrik Johannes. Component-Based Model-Driven Software Development. Technische Universität Dresden, Dec. 2010
<http://nbn-resolving.de/urn:nbn:de:bsz:14-qucosa-63986>
Jendrik Johannes and Uwe Aßmann, Concern-Based (de)composition of Model-Driven Software Development Processes. Model Driven Engineering Languages and Systems - 13th International Conference, MODELS 2010, 2010, Part II, Springer, 2010, LNCS 6395, URL = <http://dx.doi.org/10.1007/978-3-642-16129-2>





Falk Hartmann. Safe Template Processing of XML Documents. PhD thesis. Technische Universität Dresden, July 2011.



Software Composition

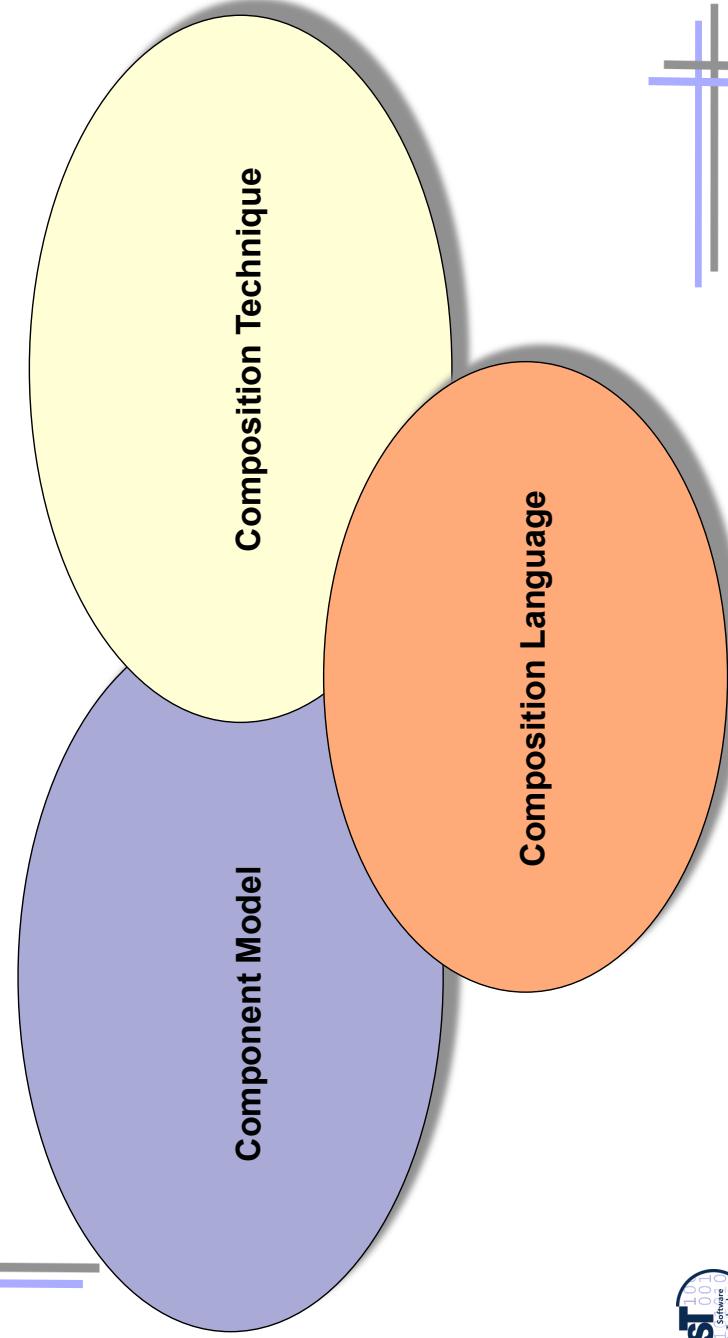

25.1) Invasive Software Composition - A Fragment-Based Composition Technique

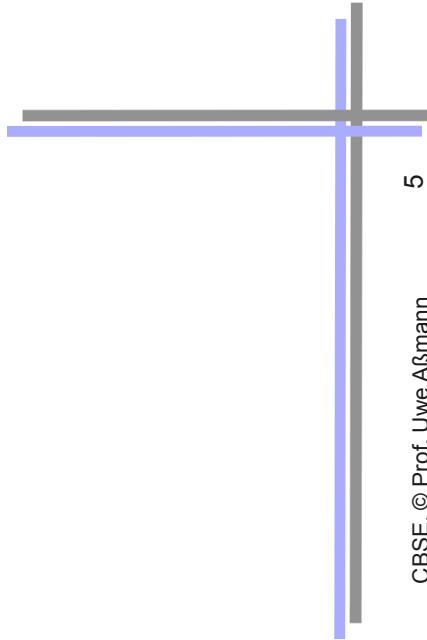

CBSE, © Prof. Uwe Aßmann

5

Invasive Software Composition



Invasive software composition **parameterizes** and **extends**
fragment components at **hooks**
by transformation


- A **fragment component** is a fragment group (fragment container, fragment component, fragment box)
 - a set of fragments or fragment forms
- Uniform representation for
 - a fragment
 - a class, a package, a method
 - a fragment group
 - an advice or an aspect
 - some metadata
 - a composition program
- A generic fragment (group)



Prof. U. Aßmann, CBSE

6

The Component Model of Invasive Composition




Hooks are *change points* of a fragment component:
fragments or positions,
which are subject to change

- ▶ Fragment components have hooks (change points)
- ▶ A *change point* can be
 - An *extension point* (*hook*)
 - A *variation point* (*slot*)
- ▶ Example:
 - Extension point: method entries/exits
 - Variation point: Generic parameters



Implicit Hooks

- ▶ A **hook (extension point)** is given by the component's language
- ▶ Hooks can be *implicit* or *explicit (declared)*
 - We draw implicit hooks *inside* the component, at the border
- ▶ Example: Method Entry/Exit

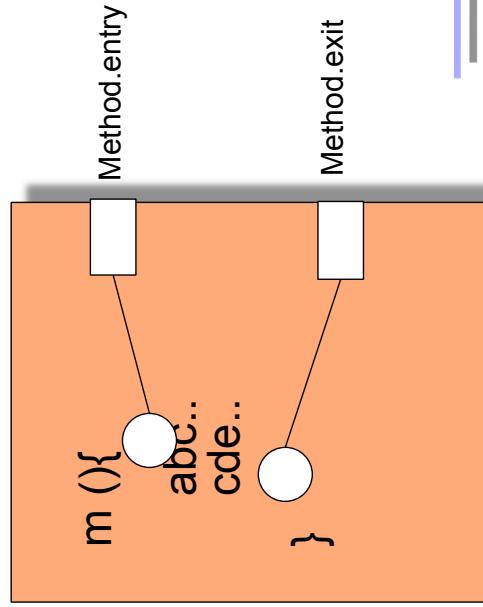




Slots (*Declared Hooks*)

- ▶ A **slot** is a variation point (a code parameter)
- ▶ Slots are always *declared*, i.e., declared or explicit hooks
 - They are never implicit, i.e., must be declared by the component writer
 - We draw slots as crossing the border of the component

Declarations

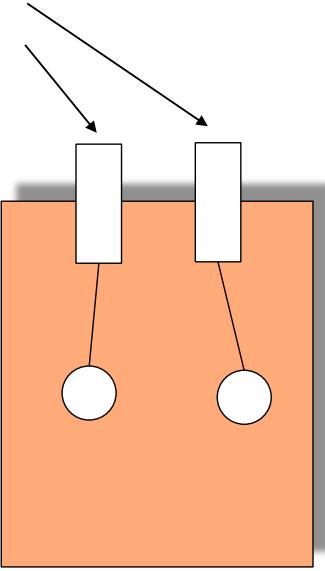

9

The Composition Technique of Invasive Composition

Invasive Software Composition **parameterizes** and **extends** fragment components at implicit and declared hooks by transformation

An invasive composition operator treats declared and implicit hooks **uniformly**




10


Prof. U. Aßmann, CBSE

The Composition Technique of Invasive Composition

- A **composer** (*composition operator*) is a static metaprogram (program transformer)

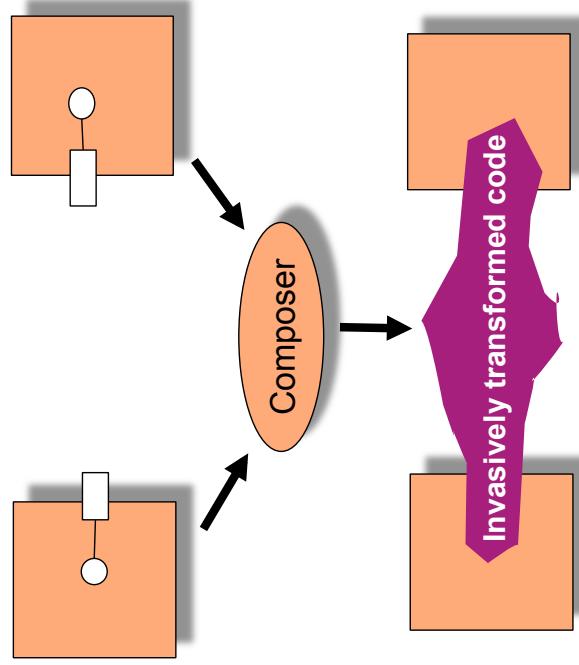

Bind Composer Parameterizes Fragment Components


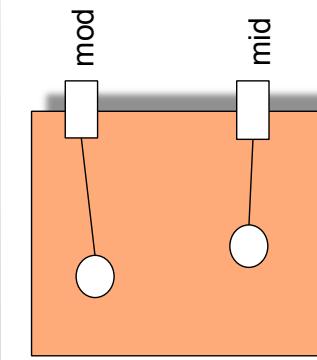


```
<<mod:Modifier>>
m (){
    abc...
    <<mid:Statement>>
    cde...
}
```

```
synchronized m (){
    abc...
    f();
    cde...
}
```

```
component.findHook(,mod").bind("synchronized");
component.findHook(,mid").bind("f();");
}
```


Extend Operator Extends the Fragment Components

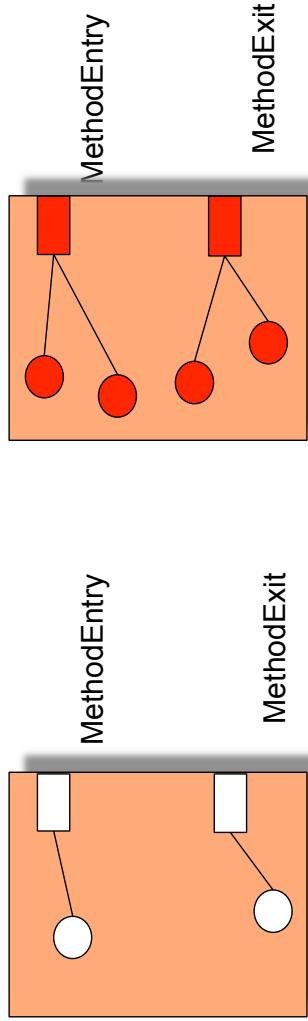

```
m (){  
    abc..  
    cde..  
}  
↑
```

```
component.findHook(„MethodEntry“).extend("print(\"enter m\"");  
component.findHook(„MethodExit“) extend("print(\"exit m\"");
```

Merge Operator



```
merge(Component C1, Component C2) :=  
extend(C1.list, C2.list)
```

where list is a list of inner components, inner fragments, etc.


On the Difference of Declared and Implicit Hooks

- ▶ Invasive composition unifies generic programming (BETA) and view-based programming (merge composition operators)

- By providing *bind* (parameterization) and *extend* for all language constructs

```
Hook h = methodComponent.findHook("MY");
if (parallel)
    h.bind("synchronized");
else
    h.bind("");
methodComponent.findHook("MethodEntry").bind("");
methodComponent.findHook("MethodExit").bind("");

/*
 * @genericMYModifier * / public print() {
// <<MethodEntry>>
if (1 == 2)
    System.out.println("Hello World");
// <<MethodExit>>
    return;
else
    System.out.println("Bye World");
// <<MethodExit>>
    return;
}
*/
```

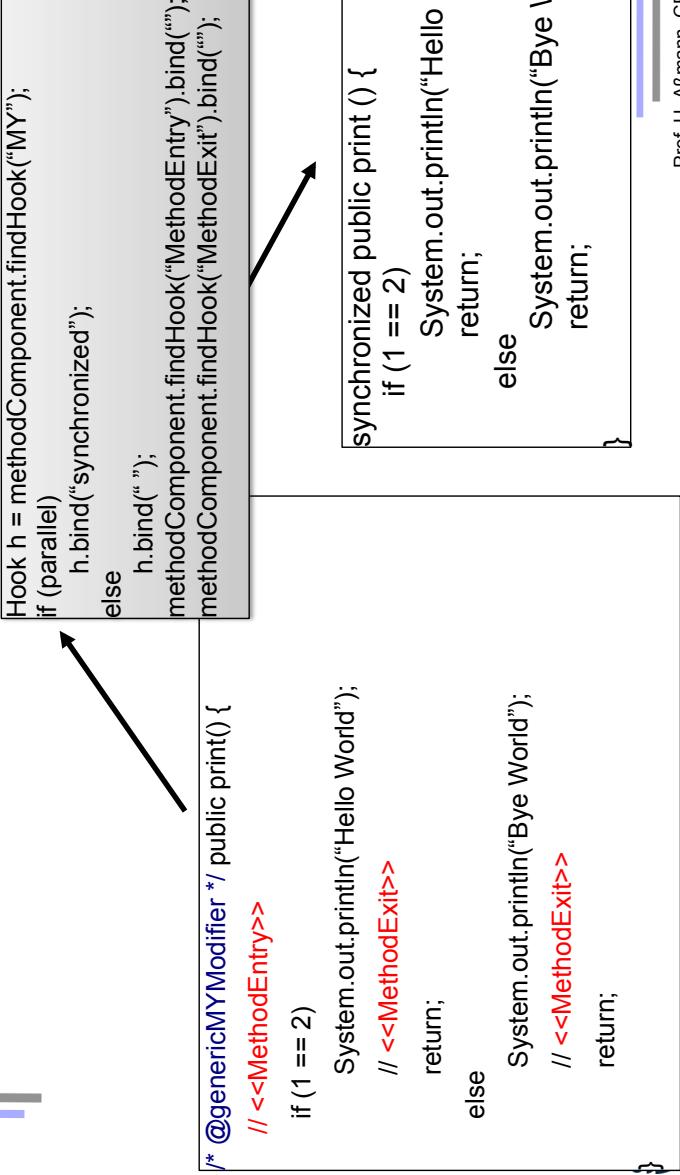

Prof. U. Aßmann, CBSE 15

Prof. U. Aßmann, CBSE 15


When Do you Need Invasive Composition

- ▶ When static relations have to be adapted
 - Inheritance relationship: multiple and mixin inheritance
 - Delegation relationship: When delegation pointers have to be inserted
 - Import relationship
 - Definition/use relationships (adding a definition for a use)
- ▶ When physical unity of logical objects is desired
 - No splitting of roles, but integration into one class
- ▶ When the resulting system should be highly integrated



Invasive Extension Integrates Feature Groups

- ... and roles, because a feature group can play a role
- The invasive extension lies between inheritance and delegation

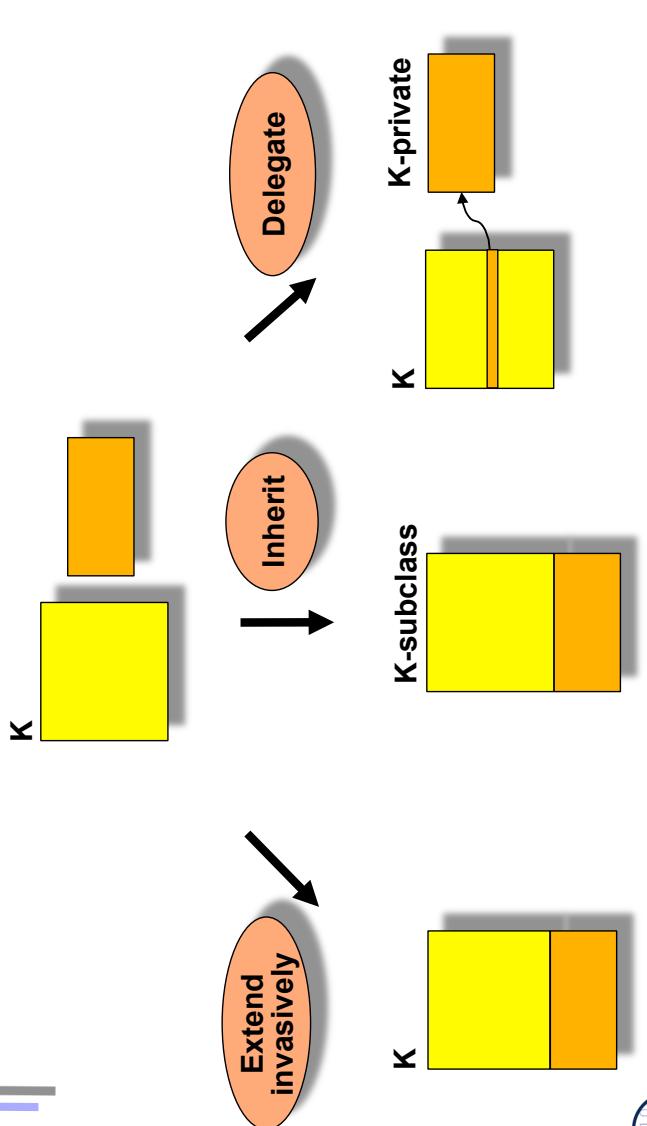

Prof. U. Aßmann, CBSE

17

When To Use What?

- Deploy Inheritance
 - for consistent side-effect free composition
- Deploy Delegation
 - for dynamic variation
 - suffers from object schizophrenia
- Deploy Invasive Extension
 - for non-foreseen extensions that should be *integrated*
 - to develop aspect-orientedly
 - to adapt without delegation



Prof. U. Aßmann, CBSE


18



Invasive Composition

Adds a full-fledged composition language to generic and view-based programming

Combines architectural systems, generic, view-based and aspect-oriented programming

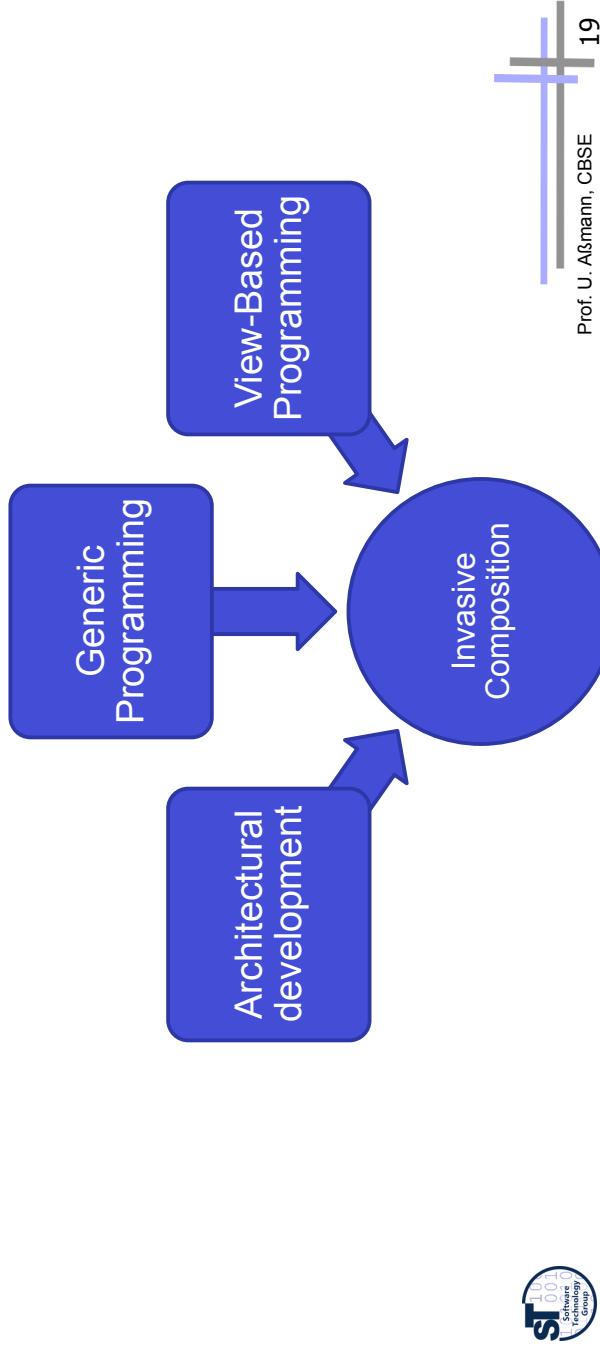

Composition Programs

Basically, every language may act as a composition language, if its basic operators are *bind* and *extend*.

Imperative languages: Java (used in COMPOST), C, ..

Graphical languages: boxes and lines (used in Reuseware)

Functional languages: Haskell


Scripting languages: TCL, Groovy, ...

Logic languages: Prolog, Datalog, F-Datalog

Declarative Languages: Attribute Grammars, Rewrite Systems



25.2) What Can You Do With Invasive Composition?



Universally Generic Programming



In contrast to BETA, ISC offers a full-fledged composition language

```
<< ClassBox >>
class SimpleList {
    genericTType elem;
    SimpleList next;
    genericTType getNext() {
        return next.elem;
    }
}
```

T


```
<< ClassBox >>
class SimpleList {
    WorkPiece elem;
    SimpleList next;
    WorkPiece getNext() {
        return next.elem;
    }
}
```






Invasive Connections


In contrast to ADL, ISC offers invasive connections

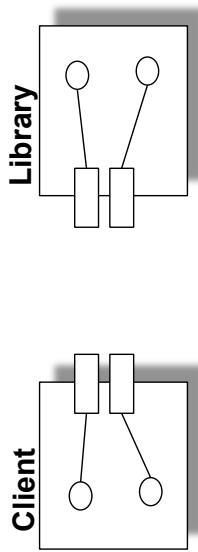

Blackbox
Composition

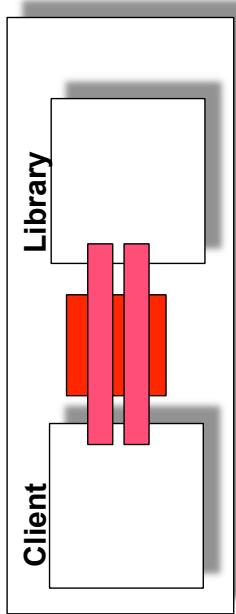

Invasive
Composition

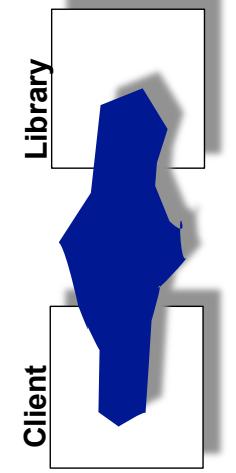


Blackbox connection with glue code



Invasive Connection
Prof. U. Aßmann, CBSE 23

Mixin Inheritance

- Extension can be used for inheritance (mixins)
- In contrast to OO languages, ISC offers tailored inheritance operations, based on the extend operator

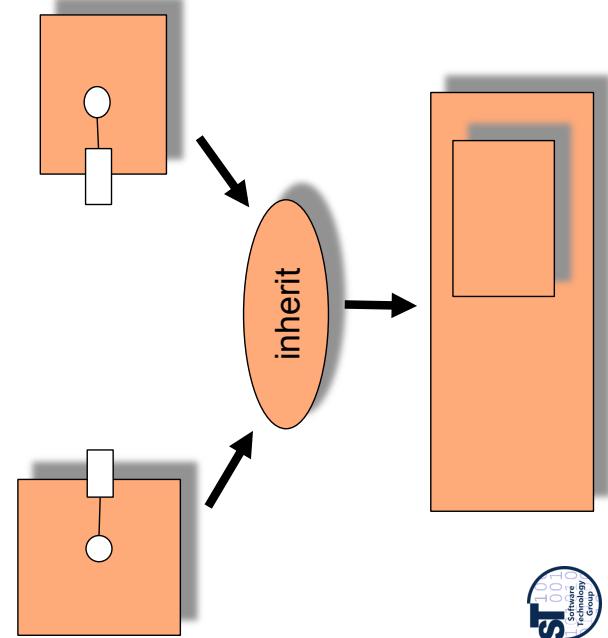


- inheritance :=
 - copy first super class
 - extend with second super class



Prof. U. Aßmann, CBSE 24

Mixin Inheritance Works Uniformly for Languages that don't have it


- ▶ Invasive composition can model mixin inheritance uniformly for all languages
- ▶ e.g., for XML
 - ▶ inheritance :=
 - copy first super document
 - extend with second super document

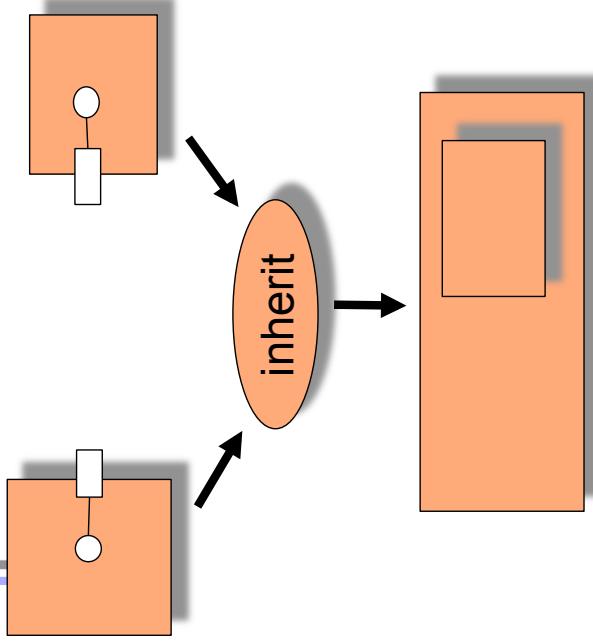

Invasive Document Composition for XML

- ▶ Invasive composition can be used for document languages, too [Hartmann2011]


- ▶ Example List Entry/Exit of an XML list
- ▶ Hooks are given by the Xschema

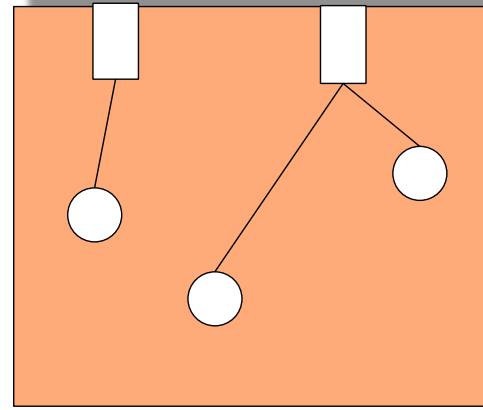

List.entry →
...
...
List.exit →




Hook Manipulation for XML

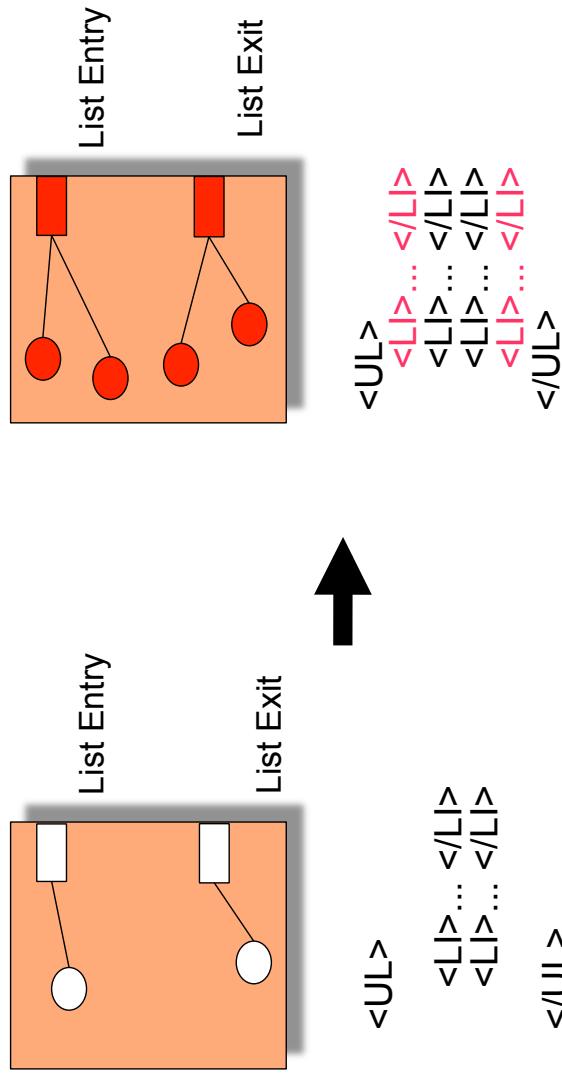

```
XMLComponent.findHook("ListEntry").extend(<L>... </L>);  
XMLComponent.findHook("ListExit").extend("<L>... </L>");
```

Composers can be Used as Weavers in AOP (Core and Aspect Components)

- Complex composers distribute aspect fragments over core fragments
- Distributors extend the core
- Distributors are more complex operators, defined from basic ones
- Static aspect weaving can be described by distributors

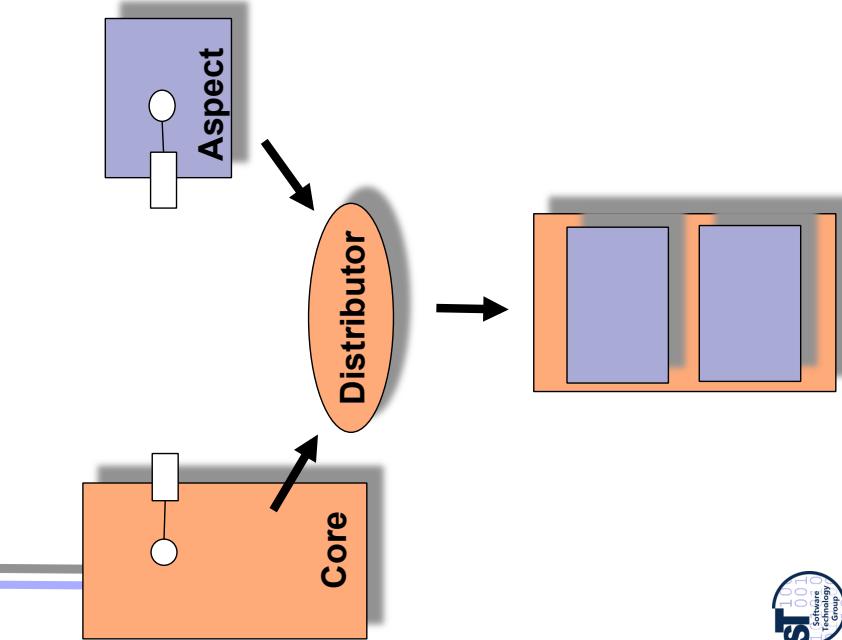




Invasive Model Composition with Reuseware



25.3) Composition and Functional Interfaces






Composition vs Functional Interfaces

Composition interfaces contain hooks and slots


static, based on the component model at design time

Functional interfaces are based on the component model at run time and contain slots and hooks of it

Program Elements or Code Positions




Declared Hooks




Implicit Hooks




Output Port



Input Port



Provided Method

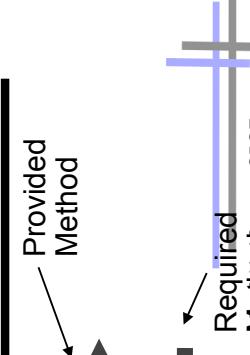


U. Aßmann, CBSE

31

Functional Interfaces are Generated from Composition Interfaces


2-stage process

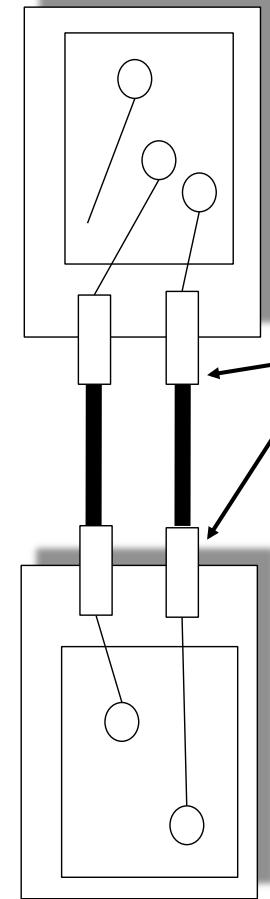

Composition Interface (Boxes with Declared Hooks)



Functional Interface (Classes or Modules with Methods)

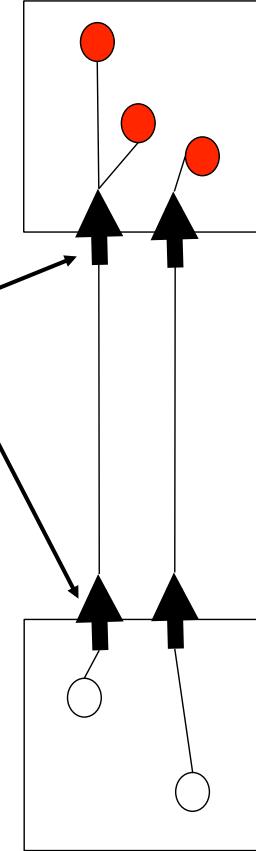


32






Execution of a Composition Program

- transforms a set of fragment components step by step, binding their composition interfaces (filling their slots and hooks), resulting in an integrated program with functional interfaces

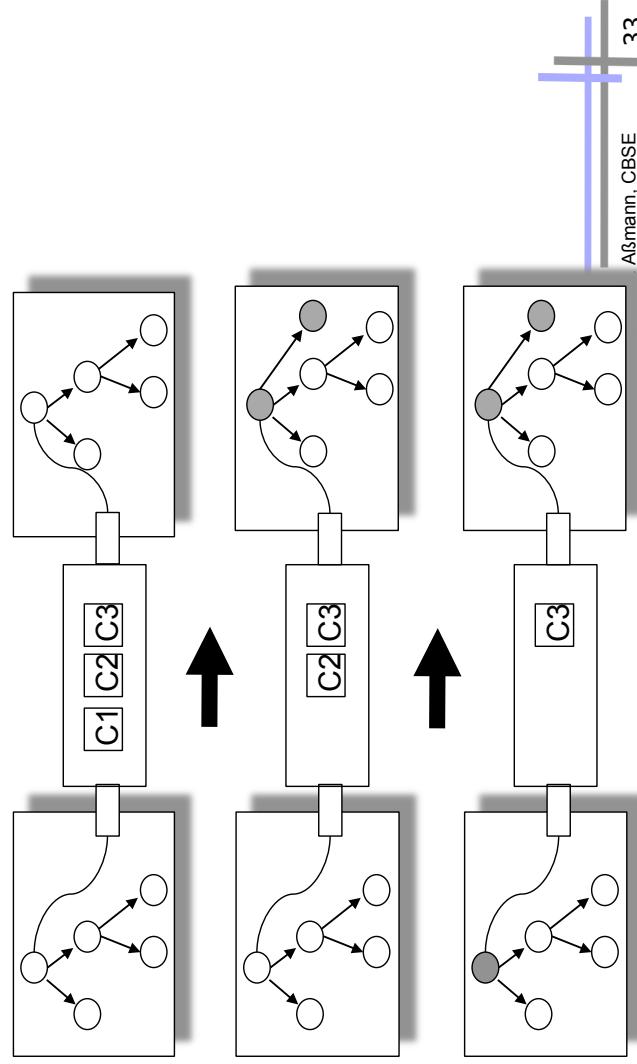

25.4) Different Forms of Greyboxes (Shades of Grey)





Invasive Composition and Information Hiding

- ▶ Invasive Composition modifies components at well-defined places during composition
 - There is less information hiding than in blackbox approaches
 - But there is...
 - ... that leads to greybox components




Refactoring is a Whitebox Operation

- ▶ Refactoring works directly on the AST/ASG
- ▶ Attaching/removing/replacing fragments
- ▶ Whitebox reuse




Refactorings Transformations



Modifying Implicit Hooks is a Light-Grey Operation




- Aspect weaving and view composition works on implicit hooks (*join points*)
- Implicit composition interface*



Composition with implicit hooks



Refactorings Transformations

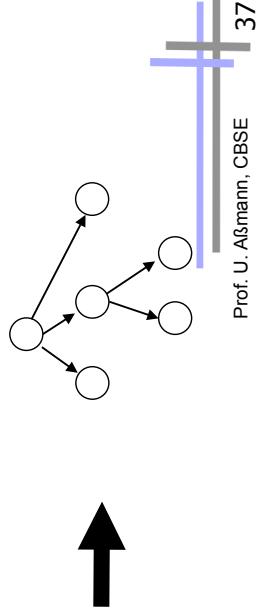


Prof. U. Aßmann, CBSE


37

Parameterization as Darker-Grey Operation


- Templates work on *declared hooks*
- Declared composition interface*



Composition with declared hooks



Refactorings Transformations




Prof. U. Aßmann, CBSE


38




Systematization Towards Greybox Component Models




Composition with declared hooks






Composition with implicit hooks





Refactorings Transformations

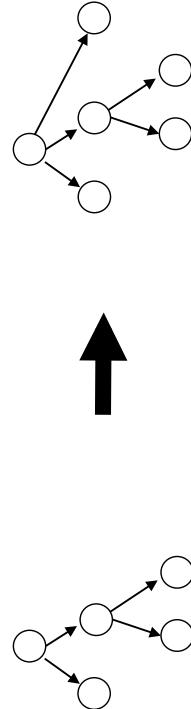


Refactoring Builds On Transformation Of Abstract Syntax




Refactoring

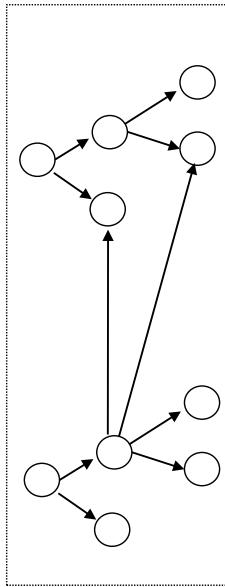



Invasive Composition Builds On Transformation Of Implicit Hooks

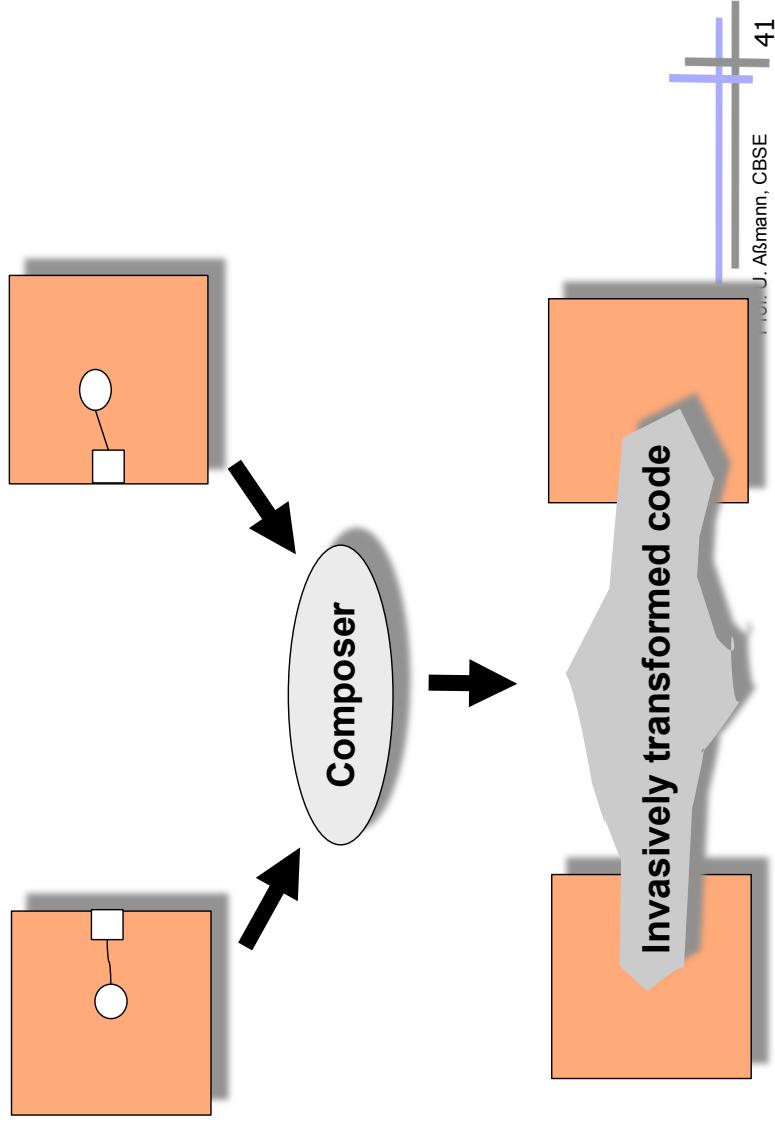

Invasive Composition Builds On Transformation on Declared Hooks

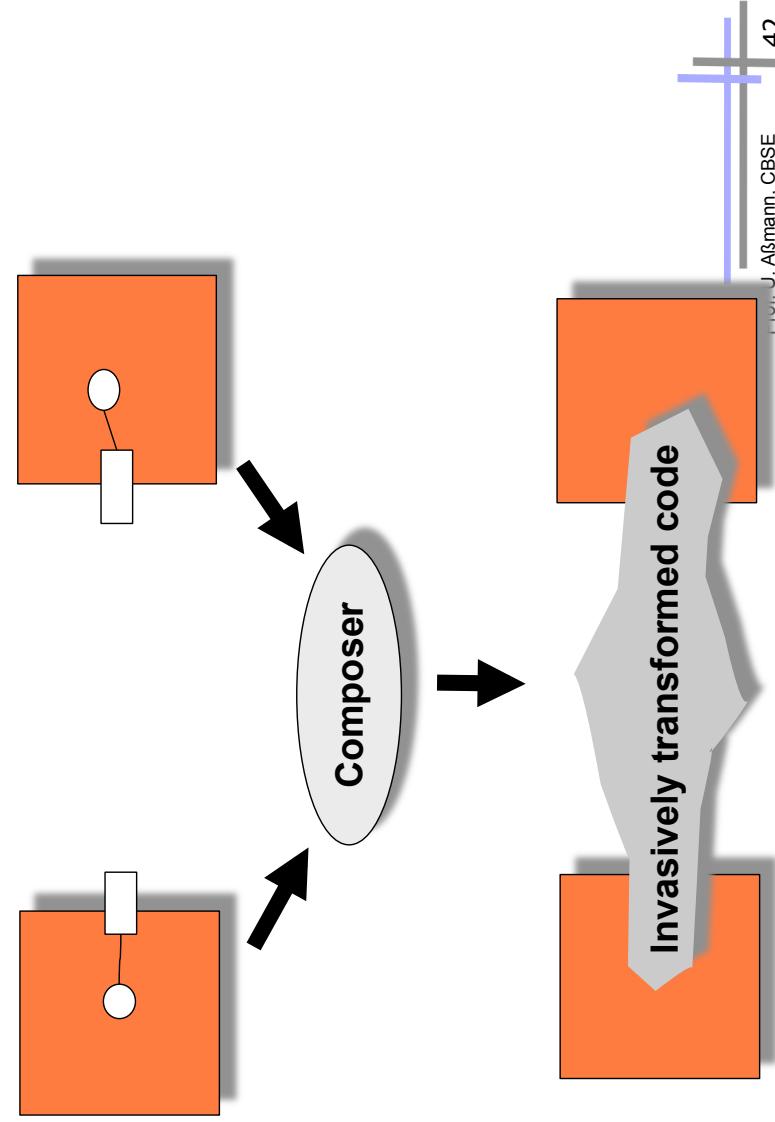

25.5 Invasive Software Composition as Composition Technique

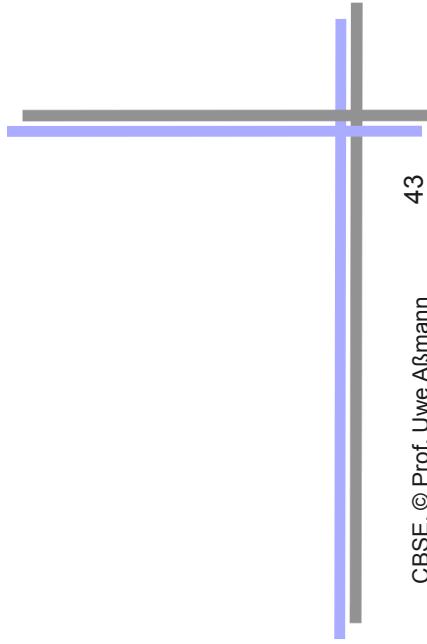

CBSE, © Prof. Uwe Aßmann

43

Invasive Composition: Component Model



- Fragment components are graybox components

- Composition interfaces with declared hooks
- Implicit composition interfaces with implicit hooks
- The composition programs produce the functional interfaces

- Resulting in efficient systems, because superfluous functional interfaces are removed from the system

- Content: source code
 - binary components also possible, poorer metamodel


- Aspects are just a special type of component

- Fragment-based parameterisation a la BETA

- Type-safe parameterization on all kinds of fragments



Invasive Composition: Composition Technique




- ▶ Adaptation and glue code: good, composers are program transformers and generators
- ▶ Aspect weaving
 - Parties may write their own weavers
 - No special languages
- ▶ Extensions:
 - Hooks can be extended
 - Soundness criteria of lambdaN still apply
 - Metamodelling employed
- ▶ Not yet scalable to run time



45

Prof. U. Aßmann, CBSE

Composition Language



- ▶ Various languages can be used
- ▶ Product quality improved by metamodel-based typing of compositions
- ▶ Metacomposition possible
 - Architectures can be described in a standard object-oriented language and reused
- ▶ An *assembler* for composition
 - Other, more adequate composition languages can be compiled



46

Prof. U. Aßmann, CBSE

Conclusions for ISC


- ▶ Fragment-based composition technology
 - Graybox components
 - Producing tightly integrated systems
- ▶ Components have *composition interface*
 - From the composition interface, the functional interface is derived
 - Composition interface is different from functional interface
 - Overlaying of classes (role model composition)
- COMPOST framework showed applicability of ISC for Java
 - (ISC book)
- Reuseware Composition Framework extends these ideas
 - For arbitrary grammar-based languages
 - For metamodel-based languages
- <http://reuseware.org>



47


Prof. U. Aßmann, CBSE

Invasive Composition as Composition System

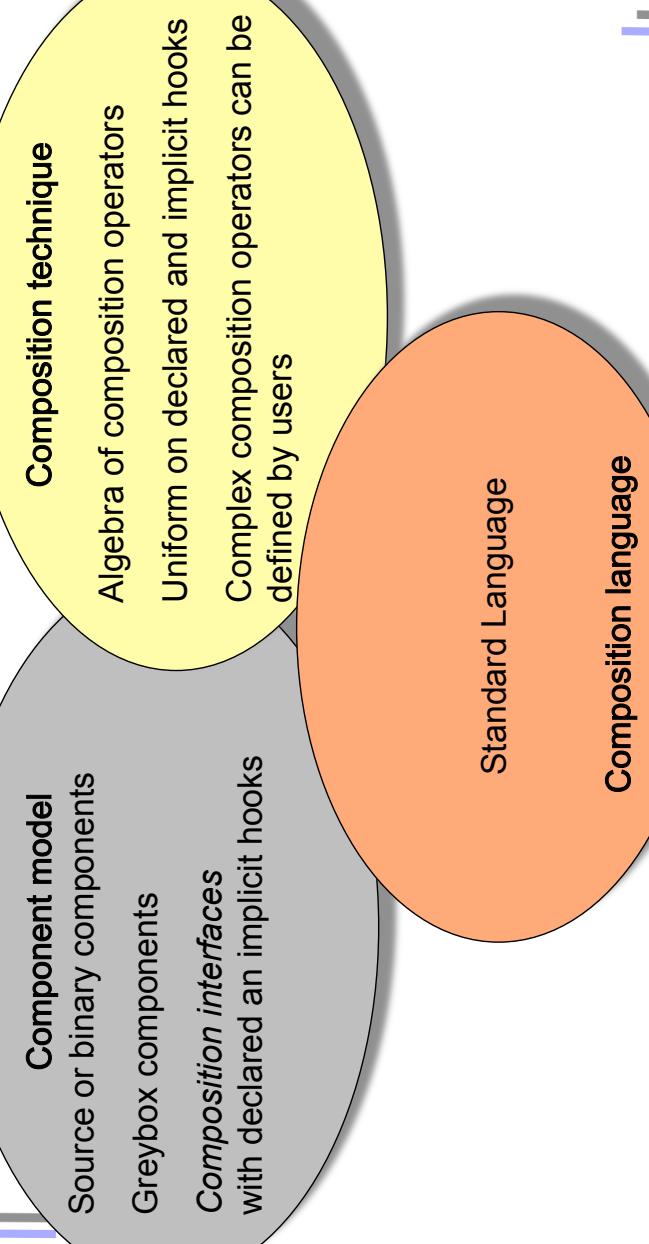

48

Prof. U. Aßmann, CBSE



What Have We Learned

- With the uniform treatment of declared and implicit hooks, several technologies can be unified:
 - Generic programming
 - Connector-based programming
 - Refactorings
 - Inheritance-based programming
 - View-based programming
 - Aspect-based programming



The End

