



30. Refactoring based on Metaprogramming

Andreas Ludwig
Prof. U. Aßmann

<http://recoder.sf.net>



Design Patterns and Frameworks, © Prof. Uwe Aßmann

1

Obligatory Literature

- ▶ Tom Mens and Tom Tourwe. A survey of software refactoring. IEEE Transactions on Software Engineering, 30, 2004.
- ▶ <http://informatique.umons.ac.be/genlog/resources/refactoringPapers.html>
- ▶ Ludwig, Andreas and Heuzeroth, Dirk. Meta-Programming in the Large, Generative Component-based Software Engineering (GCSE), ed. Eisenecker, U. W. and Czarnecki, K., Erfurt, Germany, pages 443-452, Springer, Lecture Notes in Computer Science 2177, 2001

http://dx.doi.org/10.1007/3-540-44815-2_13

<http://www.springerlink.com/content/f56841633653q258/>



3

Overview

- 1 Programming in the Large and Refactoring
 - Problems, Concepts, The Approach
- 2 The Architecture of RECODER
 - Requirements, Separation of concerns, Dataflow, Models, Algorithms
- 3 Generic Refactoring Systems
 - Abstract Requirements



2

Non-Obligatory Literature

- ▶ James O. Coplien, Liping Zhao. Symmetry Breaking in Software Patterns. Springer Lecture Notes in Computer Science, LNCS 2177, October 2001, ff. 37.
<http://users.rcn.com/jcoplien/Patterns/Symmetry/Springer/SpringerSymmetry.html>
- ▶ W. Zimmer. Frameworks und Entwurfsmuster. Dissertation, Universität Karlsruhe, 1997, Shaker-Verlag.
- ▶ Benedikt Schulz, Thomas Genssler, Berthold Mohr, Walter Zimmer. On the Computer-Aided Introduction of Design Patterns into Object-Oriented Systems. Proceedings of TOOLS 27 -- Technology of Object-Oriented Languages and Systems, J. Chen, M. Li, C. Mingins, B. Meyer, 1998. The first time, refactorings were automatied in a CASE tool (Together)



4

Refactoring

A **refactoring** is a semantics-preserving, but structure-changing transformation of a program.

Often, the goal is a design pattern.



A Little History

- ▶ 80s: Broad-spectrum languages (CIP)
- ▶ System REFINE
- ▶ 1992 William Opdyke coined the term *refactoring*
- ▶ 1997, Karlsruhe University started a refactoring tool
 - Based on Walter Zimmer's thesis "Design patterns as operators"
 - Idea: a refactoring is a *semantics preserving operator*, transforming class graphs to class graphs
 - A refactoring operator can be implemented as a static metaprogram
- ▶ 1998, during Zimmer's work was reimplemented into the Together CASE tool, the world-wide first CASE tool with refactoring support



Classes of Refactorings

- ▶ **Rename Entity**
 - Problem: update all references on definition-use-graph
- ▶ **Move Entity**
 - Move class feature (attribute, method, exception,...)
 - Problem: shadowing of features along scoping
- ▶ **Split Entity** or **Join Entity**
 - Method, class, package
 - Problem: updating of references
- ▶ **Outline Entity** (Split Off) or **Inline Entity** (Merge)
 - Method, generic class
 - Problem: introduction of parameters



Steps of a Refactoring

- ▶ [Mens/Tourwe]
 - 1) Find the place
 - 2) Select the appropriate refactoring
 - 3) Analyze and verify that the refactoring does not change semantics
 - 4) Do it
 - 5) Reanalyze software with regard to qualities such as structure, performance, etc.
 - 6) Maintain consistency of software with secondary artefacts (documentation, test suites, requirement and design specifications etc)



Example: Rename Refactorings in Programs

How to change the name of variable Foo and keep the program consistent?

Refactor the name `Person` to `Human`:

```
class Person { .. } ----- Definition
class Course {
  Person teacher = new Person("Jim");
  Person student = new Person("John");
}
```

Reference (Use)

```
class Human { .. }
class Course {
  Human teacher = new Human("Jim");
  Human student = new Human("John");
}
```

Definition-Use Graphs (Def-Use Graphs) as a Basis of Refactorings

- ▶ Every language and notation has
 - Definitions of items (define the variable Foo)
 - Uses of items (references to Foo)
- ▶ This is because we talk in specifications about *names of objects* and their use
 - Definitions are done in a data definition language (DDL)
 - Uses are part of a data manipulation language (DML)
- ▶ Starting from the abstract syntax, the *name analysis* finds out about the definitions, uses, and their relations (the *Def-Use graph*)
 - Def-Use graphs exist in every language!
 - How to specify the name analysis, i.e., the def-use graph?

Refactoring on Def-Use Graphs

- ▶ For renaming of a definition, all uses have to be changed, too
 - We need to trace all uses of a definition in the Def-Use-graph
 - Refactoring works always on Def-Use-graphs
- ▶ Refactoring works always in the same way:
 - Change a definition
 - Find all dependent references
 - Change them
 - Recurse handling other dependent definitions
- ▶ Refactoring can be supported by tools
 - The Def-Use-graph forms the basis of refactoring tools
- ▶ However, building the Def-Use-Graph for a complete program costs a lot of space and is a difficult program analysis task
 - Every method that structures the Def-Use-Graph benefits immediately the refactoring
 - either simplifying or accelerating it

1 Programming in the Large (1)

How to organize and maintain systems with thousands of components?

- Software development becomes more than Algorithms & Data Structures.
 - ♦ Interface design is a global optimization problem
 - ♦ Many non-functional, often contradicting criteria such as efficiency, interface complexity, robustness, flexibility, ...
- There are non-local dependencies: Changes concerning interfaces and relations become a risk.
 - ♦ Hard to foresee what further changes will emerge.
 - ♦ Risks: Delay, failure, new bugs...

Programming in the Large (2)


- ▶ What does *change* mean?
 - Reconfiguration: Replace old solutions
 - ◆ Variability and extensibility
 - Adaptation: Migrate to new interfaces
 - ◆ Reengineering: Problem detection comes first
 - Evolution: Improve the program iteratively and incrementally.
- ▶ An ideal developer would never have to touch his interfaces.

Programming in the Large (3)

- ▶ Idea 1: Use development concepts that allow to express changes locally.
- ▶ Idea 2: Apply brute force and change globally regardless of costs.
 - Employ 1000 programmers?
 - Run a program?
- ▶ Idea 3: Automate the process of introducing design patterns.

Refactorings Transform Antipatterns Into Design Patterns

- ▶ A DP can be a goal of a refactoring

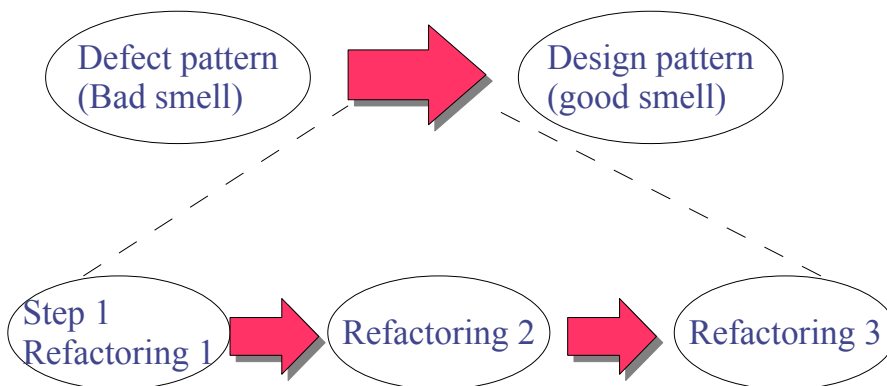

The Metaprogramming Approach to Refactoring

- ▶ Program sources are formal languages and contain a lot of accessible information.
 - We can analyze and transform programs, especially interface related code ("glue").
- ▶ A program manipulates data.
- ▶ A metaprogram is a program that manipulates programs.
- ▶ A metaprogram is a partial compiler.
 - Source-to-source?
 - At compile time?
 - Used iteratively for incremental changes?


Metaprogramming Variants

Times / Languages	Static Compile / Link	Dynamic Load / Run
$S \rightarrow S$ Code Structuring Incrementality	Program Transformations, Pattern Refactorers	Reflexive Program
$S \rightarrow S'$ Code Extension	Preprocessor, Code Generator, Aspect Weaver	
$S \rightarrow B$	Compiler	Just-In-Time Compiler
$B \rightarrow S$ Code Formatting	Decompiler	
$B \rightarrow B$ Incrementality	Binary Code Optimizer, Linker	Loader, Run Time Optimizer
$B \rightarrow B'$	Binary Code Cross Compiler	Emulator

Refactoring Engine RECODER


- ▶ Contains a compiler-like front-end and a source-to-source transformation library (metaprograms)
- ▶ \approx 100000 LOC (core: \approx 75000 LOC)
- ▶ \approx 650 classes (core: \approx 500 classes)
- ▶ 5 person-years development.
- ▶ Supports Java, including nested classes.

2 Compiler versus Source Transformation System

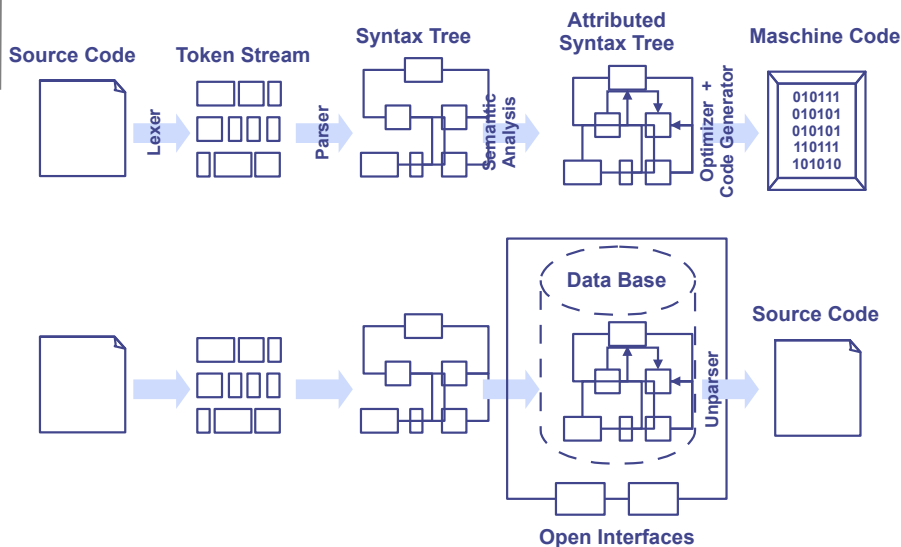

2 Design Requirements for Refactoring Tools


- ▶ Easy to use refactoring-API
 - Split functionality into services.
- ◆ Deal with any query at any time: Lazy evaluation.
- ▶ Retain Source Structure (source code hygenic)
 - Model must contain structural information.
- ▶ Incremental Evaluation
 - Keep cached data consistent, efficiently
- ▶ Incremental Analysis

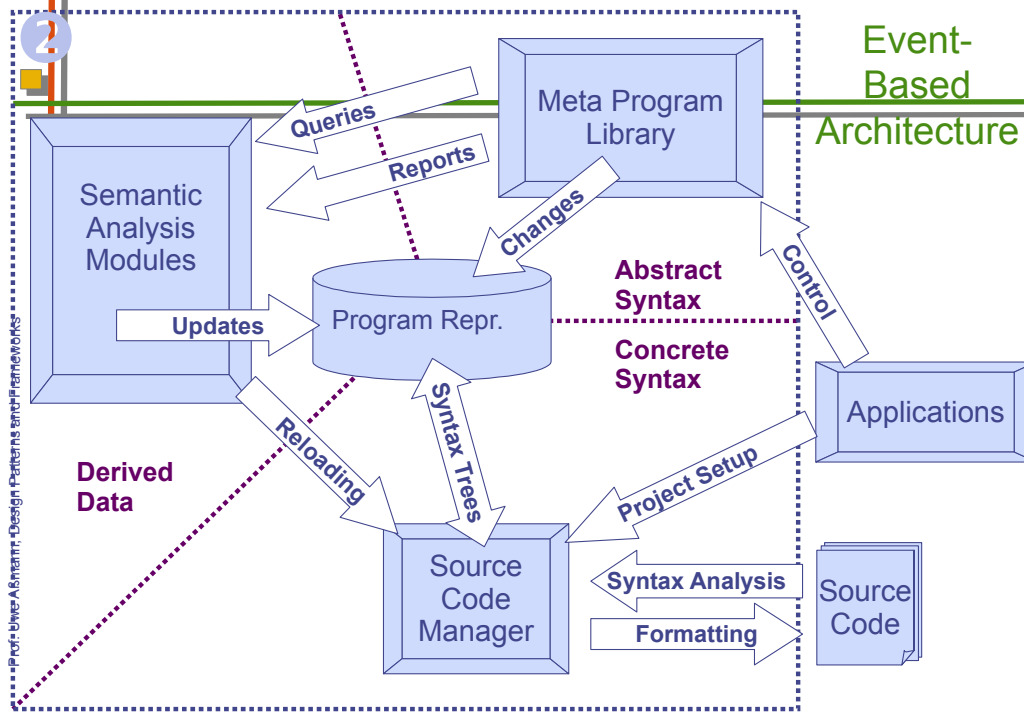

21

2 RECODER Java Model


- ◆ Java attributed syntax graph (ASG)
- ◆ Parent links for efficient upward navigation in the scope
 - Linking and unlinking must be done consistently.
- ◆ Abstract supertypes
 - Containment properties
 - Scoping properties
 - Commonalities with byte code
- ◆ Bidirectional definition-reference relation (name resolution + cross referencing)



Prof. Uwe Alsmann, Design Patterns and Frameworks


22

Abstract Java Program Metamodel

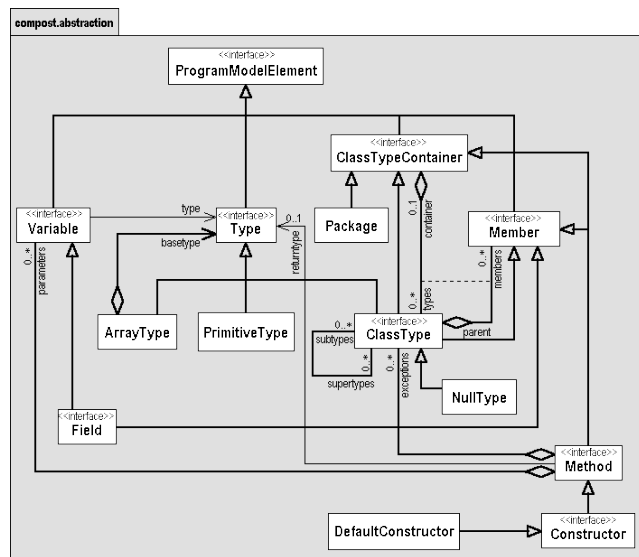


23

2 Event-based Architecture: Changes and Change Events in a Refactorer



Define changes in terms of atomic Transformations



Reduce all complex changes to atomic ones.

```
Replace(X,Z) {
  Y = Parent(X);
  p = Position(X,Y);
  Detach(X);
  Attach(Z,Y,p);
}
```




Prof. Uwe Alsmann, Design Patterns and Frameworks

24


Prof. Uwe Alsmann, Design Patterns and Frameworks

25


Example Change Report



```
PrependStatement(R, S) {
    B = Parent(S)
    if B is no Block {
        B = AddBlock(S);
        p = 0;
    } else {
        p = Position(S)
    }
    Attach(R, B, p);
}
AddBlock(S) {
    B = new Block;
    Replace(S, B);
    S' = CloneTree(S);
    Attach(S', B, 0);
    return B
}
```

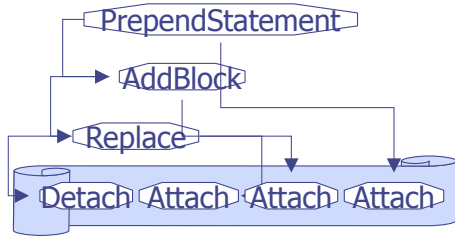


Change Report Propagation

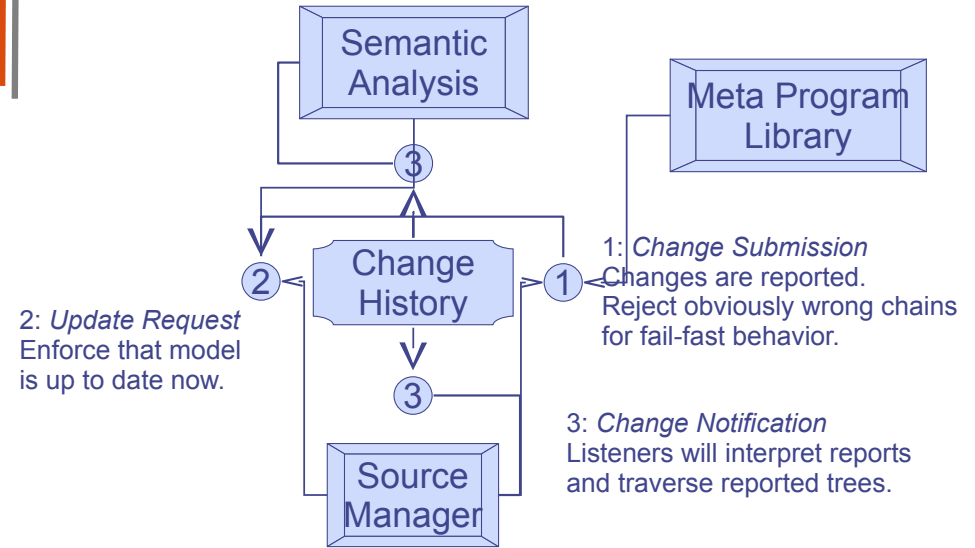


Change Report Handling


- Change notification optimization:
 - Delay changes in a queue to avoid traversals.
 - Tag subtree changes as minor to avoid traversals.
 - Clear queue after notification.
- Rollback support:
 - Keep changes on a stack.
 - To roll back, reverse changes and create reports for changes that already have been reported.
 - Clear stack after commit (or before overflow).



Model Elements and Services/Subtools

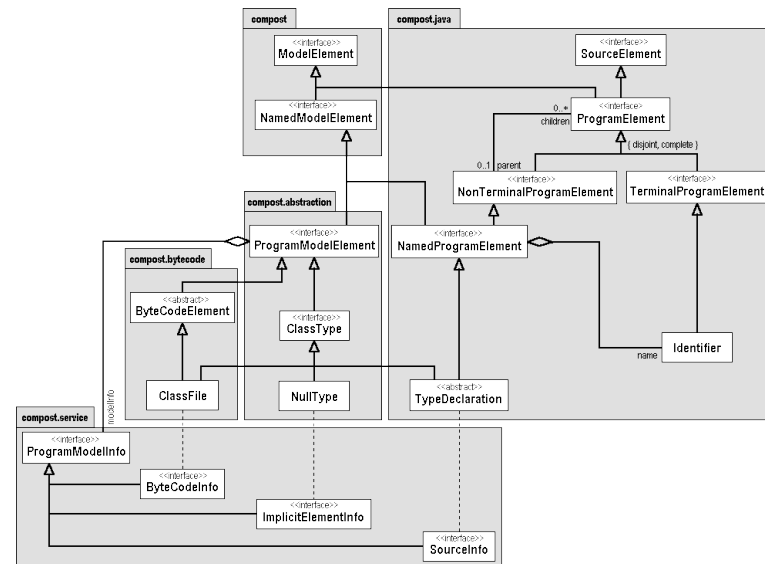

Dataflow between Subtools

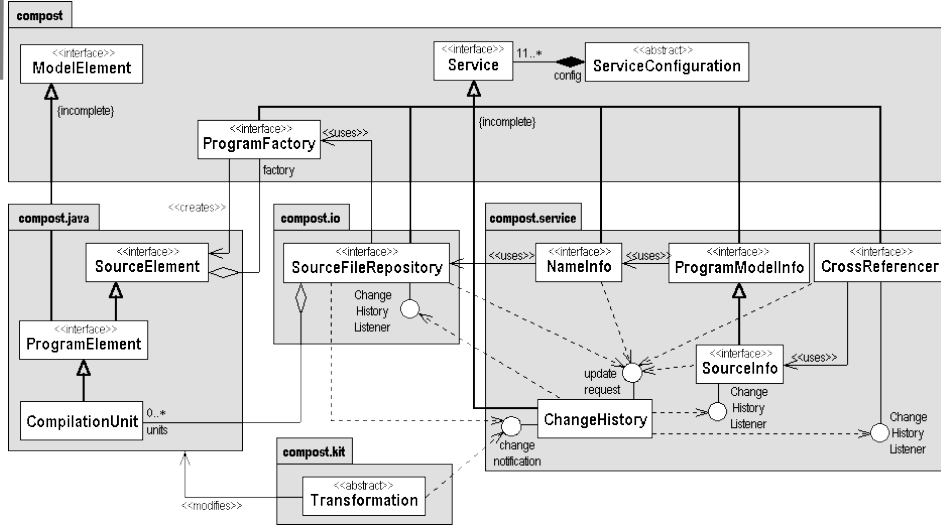

Change Impact Analysis

Efficient updates of reference information:

- If something changes, what are possibly effected declarations and references?
 - ♦ Examples follow...
- Does the target of a reference really change?
 - ♦ Access the former result to compare: Cache everything!
 - ♦ Only verified cached results can be used for the update.
 - ♦ May lead to new change tests, but is guaranteed to stop.
- Update cached information efficiently.
 - ♦ Reference sets instead of lists.

Examples for Change Impacts

- ♦ If an expression changes...
 - ♦ ...its parent reference might change.
- ♦ If a method declaration changes...
 - ♦ ...all inherited, inheriting, inner, outer, possibly overloaded and possibly overloading method references with compatible name and signature might change.
- ♦ If a subtype relation changes...
 - ♦ ... references might change as if all former and now inherited member declarations changed.

Transformation Model

- ▶ Reify as objects (Command/Objectifier Pattern of GOF).
 - Transformations must be managed for nested transactions.
 - Transformations often have to access analysis results and generated code fragments of subtransformations.
- ▶ Each transformations can yield a problem report or assert program states (e.g. compileable, or idempotent)

Transformation Composition

- ◆ Transformations may have dependencies.
- ◆ Ideal Case: 2-pass (analyze - transform)
 - Combinations result in another 2-pass operation.
 - This case is not too rare: Changes of disjoint declarations will affect disjoint references.
- ◆ Usual Case: 1-pass (analyze & transform)
 - Parent transformation must update local data.
 - Restart traversal at the “first” change location.
 - Check idempotency to ensure termination.
 - Worst case: Restart always - $O(n^2)$

Extensibility: Program Models

- ◆ New Program Model Entities
 - Add entities as subclasses of the proper types (ModelElement if nothing else applies).
 - Optionally add a management service to locate or create the new entities or keep them persistent.
- ◆ Examples:
 - Design pattern instances documenting interesting structures for quick retrieval (change of design).
 - Box & Hook Model maintained by a BoxInfo.

Extensibility: Metaprograms

- ◆ New Analyses
 - Add as auxiliary class/method if there is no need for cached data.
 - Create and register a service to participate at the change propagation, if you need incrementality.
- ◆ New Transformations
 - Simply add new subclasses of Transformation.
- ◆ Examples
 - Reachability analysis (conservative version is local)
 - Composers

How to Refactor Everything? (1)

- What kind of document can we transform?
- ▶ Strongly typed source code.
 - ▶ Makefiles?
 - ▶ XMI documents?
 - ▶ HTML pages?
 - ▶ A spreadsheet document?
- They all obey certain formal rules...

How to Refactor Everything? (2)

- ◆ The RECODER change mechanisms operate on syntactic level.
- ◆ Formal documents are structured.
 - Terminal nodes, non terminal nodes, containment relation forming a tree.
 - Syntax Trees, XML Documents.
- ◆ The architecture works for syntactic documents, if we add content type handlers.

How to Refactor Everything? (3)

- ◆ Formal documents have a static semantic.
 - Different node types (e.g. Identifier, Operator)
 - Statically computable n-ary predicates
 - ◆ e.g. isAbstract(Method), refersTo(Reference, Definition)
 - Computation of these properties, relations etc. is highly specific.

```
class X {
  /*nonsense*/
  X myself;
}
```

```
<A NAME="X"></A>
nonsense
<A HREF="#X">myself</A>
```

How to Refactor Everything? (4)

- ◆ Except for some parts of the parser, RECODER has been created manually.
- ◆ We need toolkits that create
 - a parser (including comment assignment and indentation information),
 - an unparser (customizable),
 - incremental semantic analyzers,
 - atomic type-safe transformations from some suitable definitions (AGs?)

The End

- ▶ Talk courtesy to Andreas Ludwig (2004)
- ▶ Work on RECODER started 1997 (A. Ludwig)
 - Attempt to commercialize in 2001-2 (Sweden)
 - Open source since 2001
 - Still alive
- ▶ A. Ludwig. Automatische Anpassung von Software. Dissertation. Universität Karlsruhe, 2002.