

40. Exchange Syntax and Textual DSLs using EMFText

1

Florian Heidenreich, Jendrik Johannes, Sven Karol, Mirko Seifert, Christian Wende, Uwe Aßmann

Version 12-0.3, 10/22/12

- 1) What is a DSL?
- 2) How to build a DSL
 - 1) Defining/Using a meta model
 - 2) Syntax Definition
 - 1) Generating an initial syntax (HUTN)
 - 3) Refining the syntax
 - 3) Advanced features
 - 1) Mapping text to data types
 - 2) Reference resolving
 - 3) Syntax modules (Import and Reuse)
 - 4) Interpretation vs. Compilation
 - 4) Integrating DSLs and GPLs
 - 5) Other DSL examples in the Zoo
 - 6) Conclusion

Softwareentwicklungsprojekte (SEW) © Prof. Uwe Aßmann

40.1 What is a DSL?

3

Softwareentwicklungsprojekte (SEW) © Prof. Uwe Aßmann

Literature

2

- > <http://www.emftext.org>
- > http://www.emftext.org/index.php/EMFText_Publications
- > Florian Heidenreich, Jendrik Johannes, Sven Karol, Mirko Seifert and Christian Wende. Derivation and Refinement of Textual Syntax for Models. In Proc. of the 5th European Conference on Model-Driven Architecture Foundations and Applications (ECMDA-FA 2009).
- > Mirko Seifert and Christian Werner. Specification of Triple Graph Grammar Rules using Textual Concrete Syntax. 7th International Fujaba Days, 2009
- > Florian Heidenreich, Jendrik Johannes, Mirko Seifert and Christian Wende. Construct to Reconstruct - Reverse Engineering Java Code with JaMoPP. In Proc. of the International Workshop on Reverse Engineering Models from Software Artifacts (R.E.M.'09).
- > Florian Heidenreich, Jendrik Johannes, Mirko Seifert and Christian Wende. Closing the Gap between Modelling and Java Tool demonstration at the 2nd International Conference on Software Language Engineering (SLE'09).
- > Florian Heidenreich, Jendrik Johannes, Mirko Seifert, Christian Wende and Marcel Böhme. Generating Safe Template Languages. In Proc. of the 8th International Conference on Generative Programming and Component Engineering (GPCE 2009).
- > Christian Wende and Florian Heidenreich. A Model-based Product-Line for Scalable Ontology Languages. In Proc. of the 1st International Workshop on Model-Driven Product-Line Engineering (MDPLE 2009) collocated with ECMDA-FA 2009. Enschede, The Netherlands, June 2009.
- > Mirko Seifert and Roland Samlaus. Static Source Code Analysis using OCL. In Proc. of OCL Workshop 2008 at MODELS 2008
- > Jakob Henriksson, Florian Heidenreich, Jendrik Johannes, Steffen Zschaler and Uwe Aßmann. Extending Grammars and Metamodels for Reuse -- The Reuseware Approach. IET Software Journal 2008.


Prof. U. Aßmann, Softwareentwicklungsprojekte (SEW)

EMFText is used by our new start-up, DevBoost
www.devboost.de

What's in a Domain-Specific Language (DSL)?

4

Prof. U. Aßmann, Softwareentwicklungsprojekte (SEW)

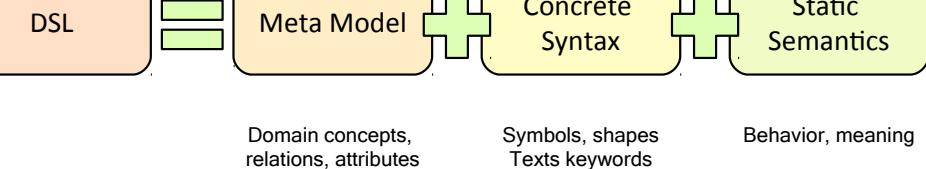

Productivity Gains with DSL


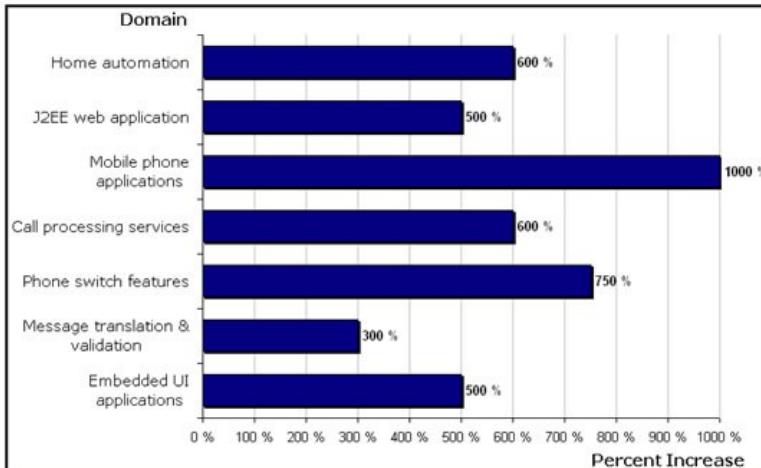


Figure 3: Measured productivity improvements in various domains

Juha-Pekka Tolvanen. Domain-Specific Modeling for Full Code Generation. January 2010. Vol. 12, Number 4. <http://journal.thedacs.com/issue/52/144>


Textual DSL rely on a Transformation Bridge from EMOF to Grammarware

- 7
- EMFText relates a concrete syntax specification (grammar in EBNF) to a EMOF/Ecore-based metamodel.
 - From this language mapping, printers (unparsers), parsers and editors are generated
 - EMFText can be used to produce normative concrete syntax for exchange formats

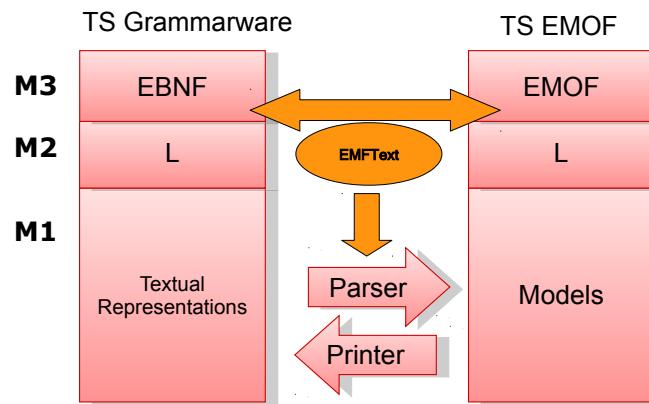

What is a Textual Domain-Specific Language (DSL)?

- 6
- EMFText relates a concrete syntax specification (grammar in EBNF) to a EMOF/Ecore-based metamodel.
 - From this language mapping, printers, parsers and editors for a DSL can be generated

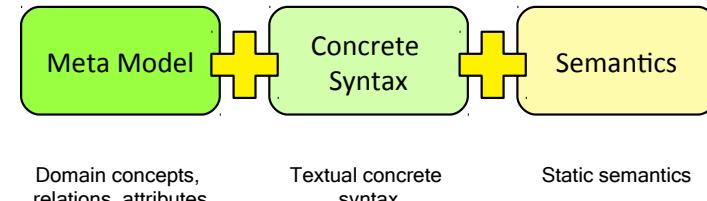

Motivation – Why DSLs?

- 8
- + Use the concepts and idioms of a domain
 - + Domain experts can understand, validate and modify DSL programs
 - + Concise and self-documenting
 - + Higher level of abstraction
 - + Can enhance productivity, reliability, maintainability and portability
 - + Embody domain knowledge, enabling the conservation and reuse of this knowledge

But:

- Costs of design, implementation and maintenance
- Costs of education for users
- Limited availability of DSLs

From: <http://homepages.cwi.nl/~arie/papers/dslbib/>

Motivation – Why textual syntax?

9 Why use textual syntax for models?

- Readability
- Diff/Merge/VCS
- Evolution
- Tool autonomy
- Quick model instantiation

Why create models from text?

- Tool reuse (e.g., to perform transformations (ATL) or analysis (OCL))
- Know-how reuse
- Explicit representation of text document structure
- Tracing software artifacts
- Graphs instead of strings

Be aware: exchange syntax is like a textual DSL

Philosophy and Goals

10 Design principles:

- Convention over Configuration
- Provide defaults wherever possible
- Allow customization for all parts of a syntax

Syntax definition should be

- Simple and easy for small DSLs
- Yet powerful for complex languages

EMFText Features

11 ▶ Generation Features

- Generation of independent code
- Generation of Default Syntax
- Customizable Code Generation

▶ Specification Features

- Modular Specification
- Default Reference Resolving
- Comprehensive Syntax Analysis

▶ Editor Features


- Code Completion, Customizable Syntax and Occurrence Highlighting, Code Folding, Error Marking, Hyperlinks, Text Hovers, Outline View, ...

▶ Other Highlights

- ANT Support, Post Processors, Builder, Interpreter and Debugger Stubs, Quick Fixes

EMFText Language Development Process

12

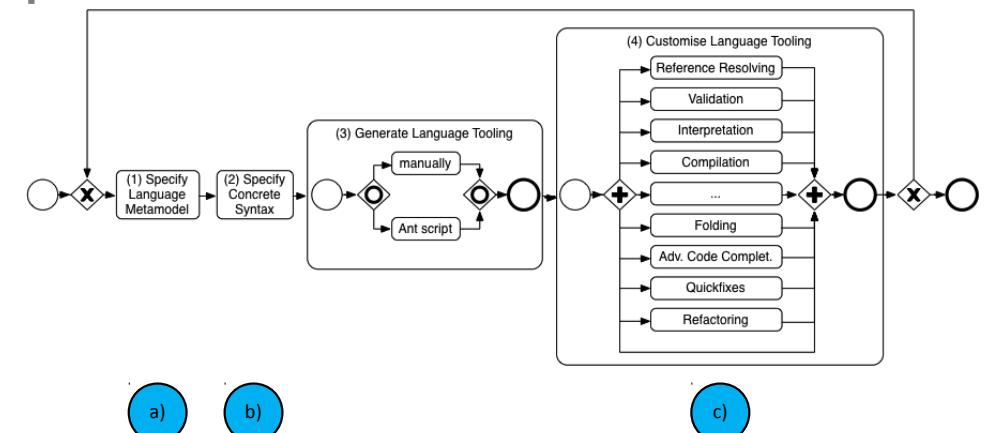


40.2 How to Build a DSL

How to build a DSL – Meta model

Meta model elements:

- Classes
- Data Types
- Enumerations
- Attributes
- References (Containment, Non-containment)
- Cardinalities
- Inheritance

How to build a DSL – Meta model

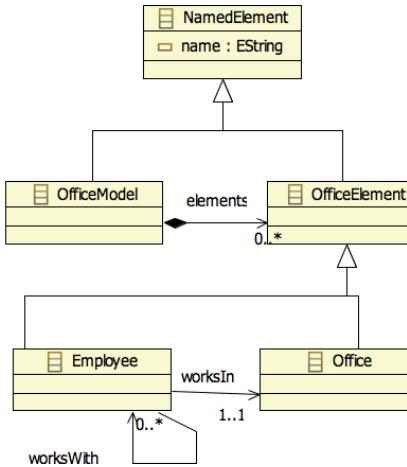


Creating a new meta model:

- ▶ Define concepts, relations and properties in an Ecore model
- ▶ Existing meta models can be imported (e.g., UML, Ecore, ...)

a)

Generate initial syntax (Human Usable Text Notation)

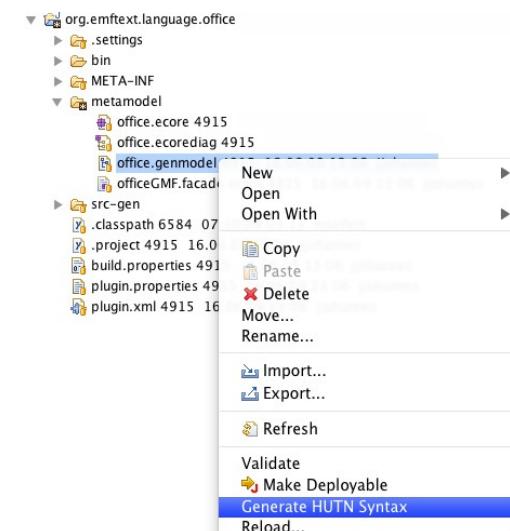

a) → b)

Initial HUTN syntax

```
SYNTAXDEF office
FOR <http://emftext.org/office>
START OfficeModel

TOKENS{
    DEFINE COMMENT$'//Cn!l!r!l!uffff')*$;
    DEFINE INTEGER$'0?211..9)0'..9)*10'$;
    DEFINE FLOAT$'0?CC1...9)C0'..9)*1'0) . ('0'..9)+ $;
}

TOKENSTYLES{
    "OfficeModel" COLOR #7F0055, BOLD;
    "name" COLOR #7F0055, BOLD;
    "elements" COLOR #7F0055, BOLD;
    "Employee" COLOR #7F0055, BOLD;
    "worksIn" COLOR #7F0055, BOLD;
    "worksWith" COLOR #7F0055, BOLD;
    "Office" COLOR #7F0055, BOLD;
}

RULES{
    OfficeModel ::= "OfficeModel" "{( . "name" ":" name[***] | "elements" ":" elements )* "}";
    Employee ::= "Employee" "{( . "name" ":" name[***] | "worksIn" ":" worksIn[] | "worksWith" ":" worksWith[] )* }";
    Office ::= "Office" "{( . "name" ":" name[***] )* "}";
}
```

Initial HUTN syntax – Example Document

```
OfficeModel {
    name : "SoftwareTechnology"
    elements :
        Office {
            name : "INF2080"
        }
    elements :
        Office {
            name : "INF2084"
        }
    elements :
        Employee {
            name : "Florian"
            worksIn : INF2080
            worksWith : Jendrik
        }
    elements :
        Employee {
            name : "Jendrik"
            worksIn : INF2084
            worksWith : Florian
        }
}
```

b)

Syntax refinement – The Concrete Syntax Language CS

- Structure of a .cs file:
- Header
 - File extension
 - Meta model namespace URI, *location*
 - Start element(s)
 - Imports (meta models, other syntax definitions)*
 - Options
 - Token Definitions
 - Syntax Rules

```
SYNTAXDEF office
FOR <http://emftext.org/office>
START OfficeModel

RULES{
    OfficeModel ::= "officemodel";
}
```

Syntax refinement – Syntax rules in EBNF

- One syntax rule per meta class defines the *language mapping* between EBNF and EMF metaclasses
 - Syntax: MetaClassName ::= Syntax Definition ;
- All concept mappings define a *language mapping*
- Definition elements in EBNF rules:

▪ Static strings (keywords)	"public"
▪ Choices	a b
▪ Multiplicities	+,*
▪ Compounds	(ab)
▪ Terminals	a[]
▪ Non-terminals	a

(Non-containment references, attributes)
(Containment references)


b)

Customized Syntax Rules - Examples

21

```
OfficeModel ::= "officemodel" name[]  
           "{" elements* "}" ;
```

```
officemodel SoftwareTechnology {  
    ...  
}
```

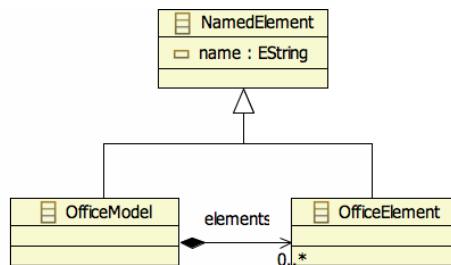

b)

Customized Syntax Rules - Examples


22

```
OfficeModel ::= "officemodel" name[]  
           "{" elements* "}" ;
```

```
Employee ::= "employee" name[]  
          "works" "in" worksIn[]  
          "works" "with" worksWith[]  
          ("," worksWith[])* ;
```

```
Office ::= "office" name[] ;
```

```
officemodel SoftwareTechnology {  
    office INF2080  
    employee Florian  
    works in INF2080  
}
```

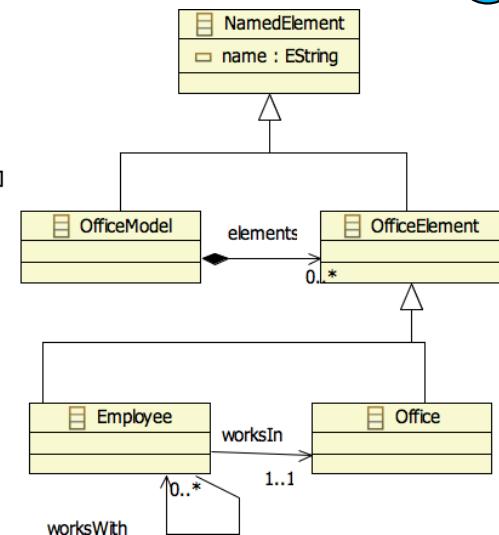

b)

Complete Customized Syntax

23

```
SYNTAXDEF office  
FOR <http://emftext.org/office>  
START OfficeModel  
  
OPTIONS {  
    generateCodeFromGeneratorModel = "true";  
}  
  
RULES {  
    OfficeModel ::= "officemodel" name[]  
    ...  
    "{" elements* "}" ;  
  
    Office ::= "office" name[] ;  
  
    Employee ::= "employee" name[]  
    ...  
    "works" "in" worksIn[]  
    "works" "with"  
    worksWith[] ("," worksWith[])* ;  
}
```

st

24

Generic Syntax vs. Custom Syntax

24

```
OfficeModel {  
    name : "SoftwareTechnology"  
    elements :  
        Office {  
            name : "INF2080"  
        }  
    }  
  
elements :  
    Office {  
        name :  
        worksIn :  
        worksWith :  
    }  
  
elements :  
    Employee {  
        name :  
        worksIn :  
        worksWith :  
    }  
  
elements :  
    Employee {  
        name :  
        worksIn :  
        worksWith :  
    }  
  
officemodel SoftwareTechnology {  
    office INF2080  
    office INF2084  
    employee Florian  
    works in INF2080  
    works with Jendrik  
    employee Jendrik  
    works in INF2084  
    works with Florian  
}
```

b)

40.3. Advanced Features of EMFText

25



Softwareentwicklungsseminar (SEW) © Prof. Uwe Aßmann

Advanced Features – Resolving Cross References

27

Well, quite similar to attribute mappings:

- ▶ Solution A: Default resolvingSearches for matching elements that have an ID attribute, a name attribute or a single attribute of type EString and picks the first (Works well for simple DSLs without scoping rules)
- ▶
- ▶ Solution B: Custom resolvingChange the generated resolver class (implements IReferenceResolver<ContainerType, ReferenceType>) For examples see the resolvers for the Java language

Prof. U. Aßmann, Softwareentwicklungsseminar (SEW)

Advanced Features – Attribute Mapping

26

Putting strings into EString attributes is easy

How about EInt, EBoolean, EFloat, ..., custom data types?

- Solution A: Default mapping
The generated classes use the conversion methods provided by Java (java.lang.Integer, Float etc.)
- Solution B: Customize the mapping using a token resolver

```
public void resolve(String lexem, EStructuralFeature feature,
    ITokenResolveResult result) {
    if ("yes".equals(lexem)) result.setResolvedToken(Boolean.TRUE);
    else result.setResolvedToken(Boolean.FALSE);
}
public String deResolve(Object value, EStructuralFeature feature,
    EObject container) {
    if (value == Boolean.TRUE) return "yes"; else return "no";
}
```

Advanced Features – Syntax Modules

28

- Import meta models optionally with syntax
- Extend, Combine existing DSLs
- Create embedded DSLs (e.g., for Java)
- Create a template language from your DSL
- ...

The screenshot shows a code editor window titled "java_templates.cs". The code is written in a syntax module definition language (SYNTAXDEF). It defines a module named "java_template" for a specific URL. The module includes imports for Java and its metamodel, and options for using predefined tokens and overriding manifest files.

```
SYNTAXDEF java_template
FOR <http://www.emftext.org/language/java_templates>
START JavaTemplate

IMPORTS {
    java : <http://www.emftext.org/java> <../../org.emftext.language.java/metamodel/java.genmodel>
        WITH SYNTAX java <../../org.emftext.language.java/metamodel/java.cs>
}

OPTIONS {
    usePredefinedTokens = "false";
    overrideManifest = "false";
}
```



Using the DSL – Interpretation vs. Compilation

29 So far we achieved to

- map input documents (text) to models
- do the inverse
-

EMFText provides an extension point to perform interpretation (or compilation) whenever DSL documents change

To use the DSL we need to assign meaning by

- ▶ InterpretationTraverse the DSL document and perform appropriate actions
- ▶ CompilationTranslate the DSL constructs to another (possibly executable) language
- ▶
- ▶ (In principle compilation is an interpretation where the appropriate action is to emit code of the target language)



Using the DSL – Interpretation vs. Compilation

31 ▶ Create an interpreter/compiler in Java

- Initially easy, but hard to maintain
-

▶ Use a model transformation

- ATL, Epsilon, ...

▶

▶ Use a template engine

- DSL documents are the parameter (models)



Challenges for MDSD

30



- ▶ Developers are required to use different tool machinery for DSLs and GPLs.
- ▶ Explicit references between DSL and GPL code are not supported. Their relations are, thus, hard to track and may become inconsistent
- ▶
- ▶ DSLs can not reuse (parts of) the expressiveness of GPLs
- ▶ Naive embeddings of DSL code (e.g., in Strings) do not provide means for syntactic and semantic checking
- ▶ Interpreted DSL code is hard to debug
- ▶ Generated GPL code is hard to read, debug and maintain



40.4. Integrating DSLs and GPLs

32



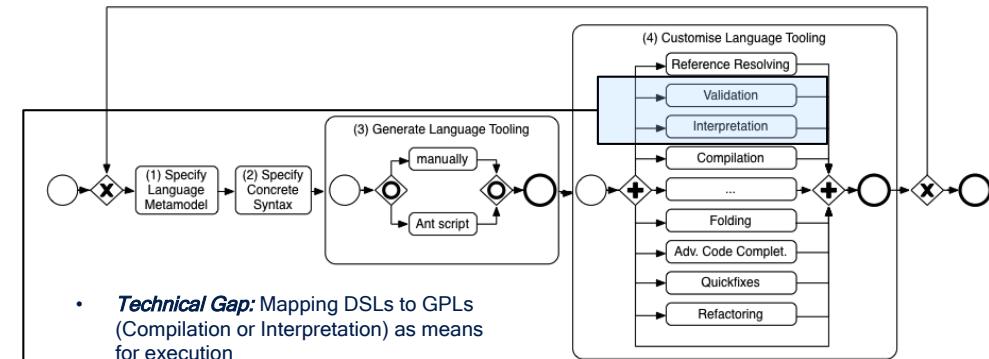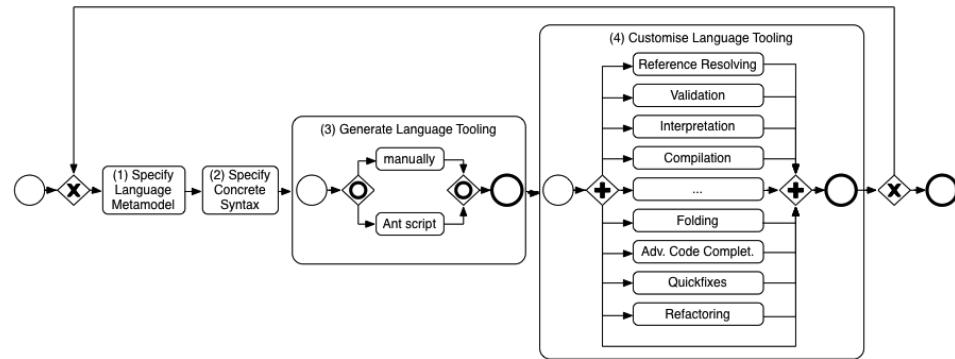

40.4.1 Integrating DSLs and GPLs - Approach

- (1) Use EMFText to *lift* GPLs to the technical space of DSLs
- (2) Language integration by metamodel and grammar inheritance

JaMoPP: Lifting Java to TS of DSLs


- Ingredients:
- Ecore Metamodel for Java 5 (153 concrete, 80 abstract classes)

JaMoPP Metamodel

JaMoPP: Lifting Java to TS of DSLs

37


- Ingredients:
- Ecore Metamodel for Java 5 (153 concrete, 80 abstract classes)
- EMFText.cs definition for each concrete class

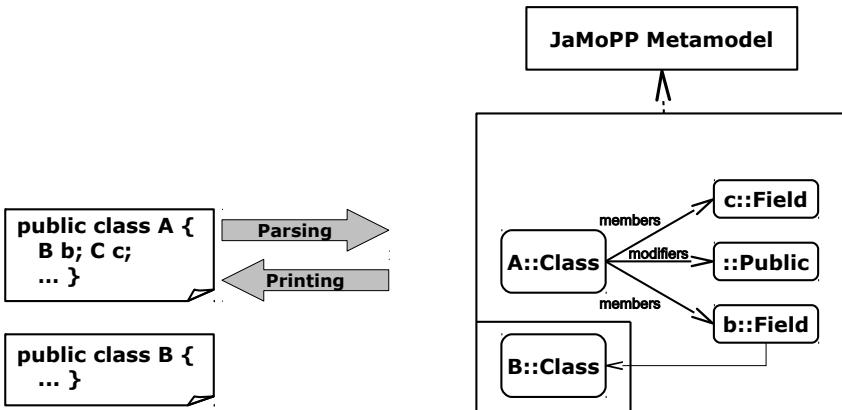

JaMoPP: Lifting Java to TS of DSLs

38


- Ingredients:
- Ecore Metamodel for Java 5 (153 concrete, 80 abstract classes)
- EMFText.cs definition for each concrete class
- BCEL Bytecode-Parser – to handle third-party libraries

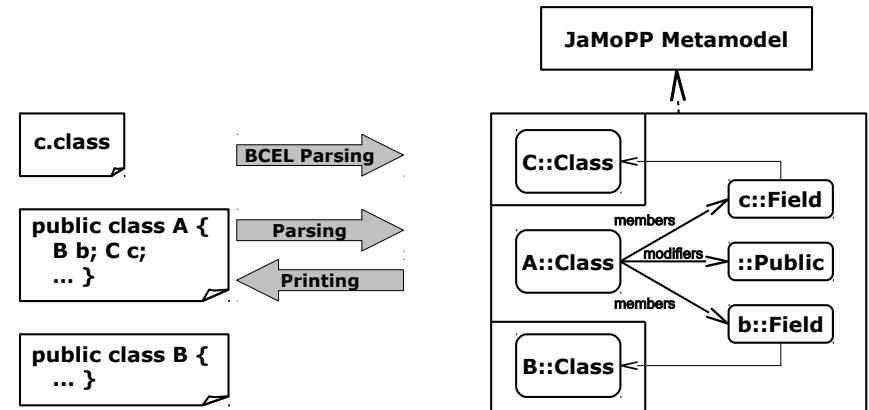

JaMoPP: Lifting Java to TS of DSLs

39

- Ingredients:
- Ecore Metamodel for Java 5 (153 concrete, 80 abstract classes)
- EMFText.cs definition for each concrete class
- BCEL Bytecode-Parser – to handle third-party libraries
- Reference Resolvers that implement java-specific scoping (static semantics)

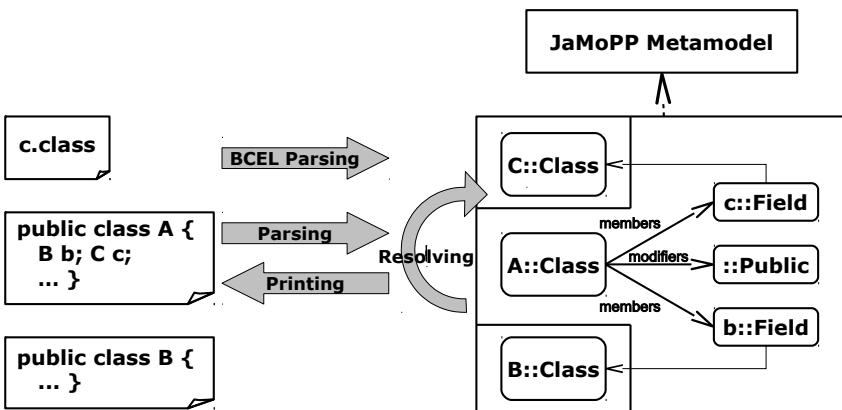

JaMoPP Metamodel


40

commons	Commentable, NamedElement, NamespaceAwareElement
types	Type, TypedElement, TypeReference, ClassifierReference, NamespaceClassifierReference, PrimitiveType, Boolean, Byte, Char, DoubleFloat, Int, Long, Short, Void
arrays	ArrayType, ArrayDimension, ArrayInitializer, ArrayInstantiationBySize, ArrayInstantiationByValues, ArraySelector
parameters	Parameter, Parametrizable, OrdinaryParameter, VariableLengthParameter
annotations	Annotable, AnnotationElementValuePair, AnnotationInstance, AnnotationMethod, AnnotationValue
classifiers	Classifier, ConcreteClassifier, Implementor, Class, AnonymousClass, Interface, Enumeration, Annotation
modifiers	Modifier, Modifiable, AnnotationInstanceOrModifier, AnnotableAndModifiable
containers	Abstract, Final, Native, Public, Protected, Private, Static, Strictfp, Synchronized, Transient, Volatile
statements	ForLoopInitializerStatement, SwitchCase, Assert, Break, Block, CatchClause, Condition, Continue, DefaultSwitchCase, DoWhileLoop, EmptyStatement, ExpressionStatement, ForLoop, ForEachLoop, JumpLabel, LocalVariableStatement, NormalSwitchCase, Return, Switch, SynchronizedBlock, Throw, TryBlock, WhileLoop
literals	Literal, Self, BooleanLiteral, CharacterLiteral, FloatLiteral, DoubleLiteral, DecimalFloatLiteral, DecimalDoubleLiteral, HexFloatLiteral, HexDoubleLiteral, IntegerLiteral, LongLiteral, DecimalIntegerLiteral, DecimalLongLiteral, HexIntegerLiteral, HexLongLiteral, OctalIntegerLiteral, OctalLongLiteral, NullLiteral, Super, This
instantiations	Initializable, Instantiation, NewConstructorCall, ExplicitConstructorCall
members	ExceptionThrower, Member, MemberContainer, AdditionalField, Constructor, EmptyMember, Field, Method, EnumConstant
expressions	Expression, ExpressionList, AssignmentExpression, AssignmentExpressionChild, ConditionalOrExpression, ConditionalOrExpressionChild, ConditionalAndExpression, ConditionalAndExpressionChild, InclusiveOrExpression, InclusiveOrExpressionChild, ExclusiveOrExpression, ExclusiveOrExpressionChild, AndExpression, AndExpressionChild, EqualityExpression, EqualityExpressionChild, InstanceOfExpression, InstanceOfExpressionChild, MultiplicativeExpressionChild, UnaryExpression, UnaryExpressionChild, UnaryModificationExpression, PrefixUnaryModificationExpression, SuffixUnaryModificationExpression, UnaryModificationExpressionChild, CastExpression, PrimaryExpression, NestedExpression
operators	Operator, AdditiveOperator, AssignmentOperator, EqualityOperator, MultiplicativeOperator, RelationOperator, ShiftOperator, UnaryOperator, UnaryModificationOperator, Assignment, AssignmentAnd, AssignmentDivision, AssignmentExclusiveOr, AssignmentMinus, AssignmentModulo, AssignmentMultiplication, AssignmentLeftShift, AssignmentOr, AssignmentPlus, AssignmentRightShift, AssignmentUnsignedRightShift, Equal, NotEqual, GreaterThan, GreatThanOrEqual, LessThan, LessThanOrEqual, Addition, Subtraction, Division, Multiplication, Remainder, Complement, MinusMinus, Negate, PlusPlus, LeftShift, RightShift, UnsignedRightShift
generics	TypeArgument, TypeArgumentable, TypeParametrizable, ExtendsTypeArgument, QualifiedTypeArgument, SuperTypeArgument, TypeParameter, UnknownTypeArgument
variables	Variable, LocalVariable, AdditionalLocalVariable
references	Reference, ArgumentList, ReferenceableElement, IdentifierReference, ReflectiveClassReference, PrimitiveTypeReference, StringReference, SelfReference
imports	Import, StaticImport, ClassifierImport, PackageImport, StaticClassifierImport, StaticMemberImport

JaMoPP Testing

41


- Parsing public class A is easy, but parsing Java 5 is not (Unicode, Generics, Annotations and lots of weird things allowed by the JLS)
- We wanted JaMoPP to be complete

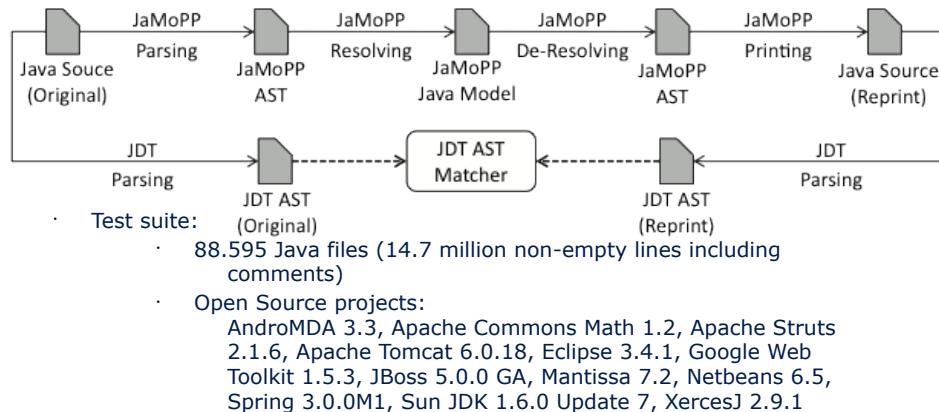

JaMoPP Tool Integration

42


- JaMoPP seamlessly and transparently integrates with arbitrary EMF-based Tools
- Parsing Java files to models and Printing Java Files is simple

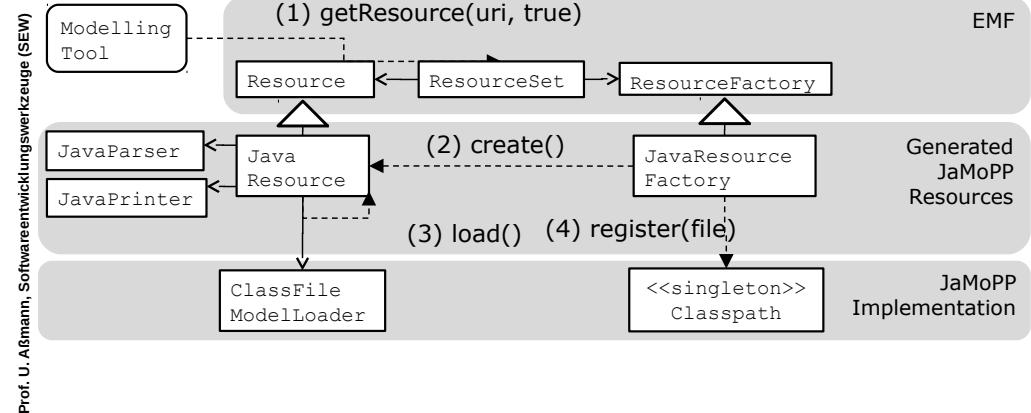

JaMoPP Tool Integration

43

- JaMoPP seamlessly and transparently integrates with arbitrary EMF-based Tools
- Parsing Java files to models and Printing Java Files is simple

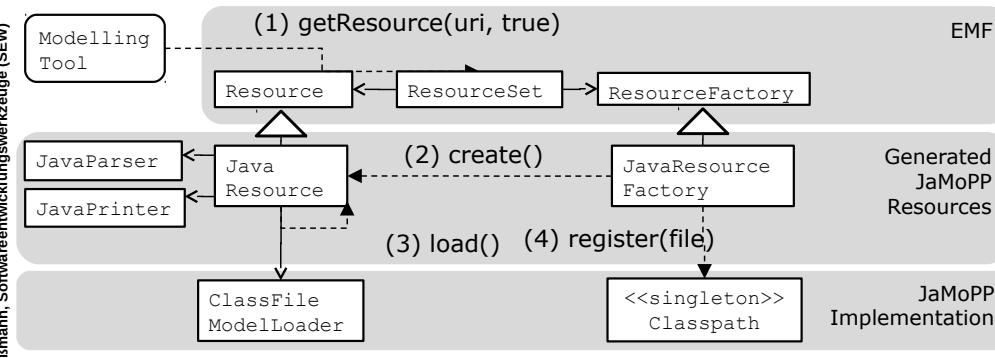


```
ResourceSet rs = new ResourceSetImpl();
Resource javaResource = rs.getResource(URI.createFileURI("A.java"),true); //parsing
javaResource.save(); // printing
```

JaMoPP Application: Code Generation (ATL)

44

- Design UML model, apply M2M transformation, print JaMoPP model
- Syntactic and semantic correctness

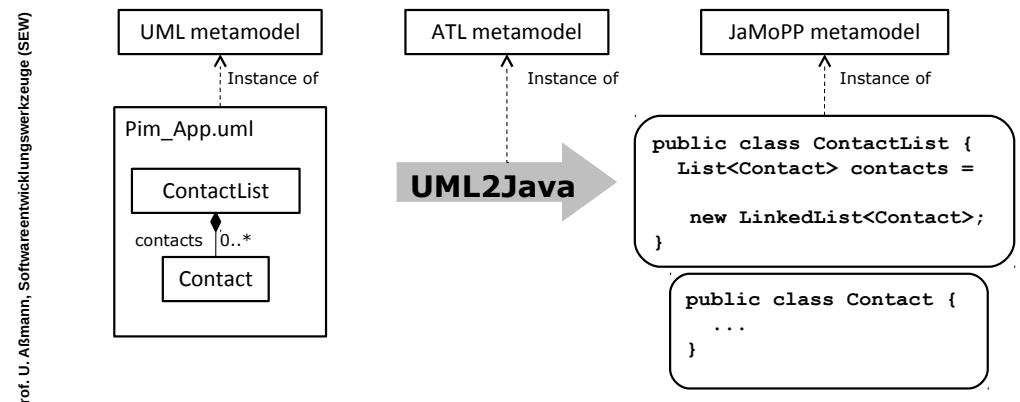

JaMoPP Application: Code Generation (ATL)

45

- ▶ Design UML model, apply M2M transformation, print JaMoPP model

```
rule Property {
    from umlProperty : uml!Property
    to javaField : java!field (
        name <- umlProperty.name,
        type <- typeReference
    ),
    typeReference : java!TypeReference (
        target <- if (umlProperty.upper = 1) then umlProperty.type
        else
            java!Package.allInstances()->any(p | p.name = 'java.lang').compilationUnits->collect(
                cu | cu.classifiers)->flatten()->any(c | c.name = 'LinkedList')
        endif,
        typeArguments <- if (umlProperty.upper = 1) then
            Sequence{} -- empty type argument list
        else
            Sequence{typeArgument}
        endif
    ),
    typeArgument : java!QualifiedTypeArgument (
        target <- umlProperty.type
    )
}
```

Prof. U. Aßmann, Softwareentwicklungswerkzeuge (SEW)

JaMoPP Application: Code Analysis (OCL)

46


- ▶ Parse Java source files to model instances
- ▶ Run OCL queries to find undesired patterns

Prof. U. Aßmann, Softwareentwicklungswerkzeuge (SEW)

```
context members::Field inv:
    self->modifiers->select(m|m.oclIsKindOf(modifiers::Public))->size() = 0
```

JaMoPP Application: Code Analysis (OCL)

47

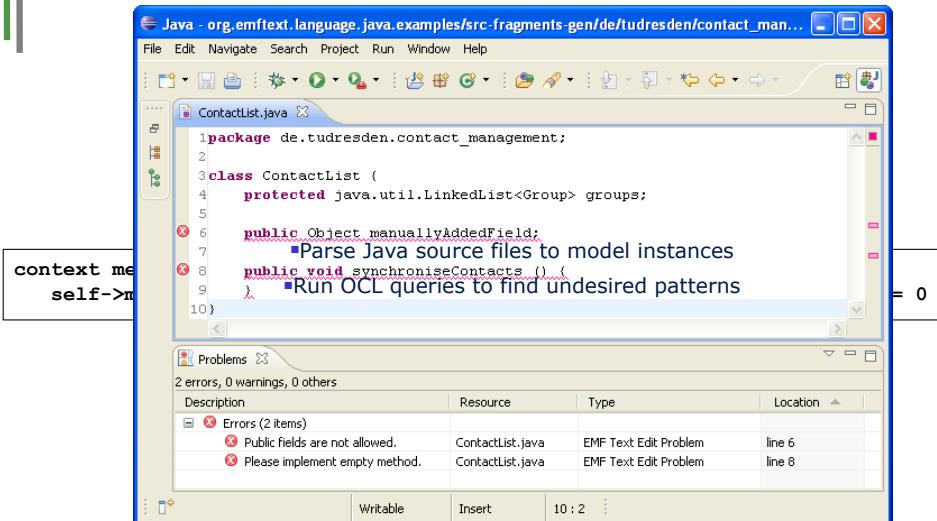


Prof. U. Aßmann, Softwareentwicklungswerkzeuge (SEW)

JaMoPP Application: Code Visualization (GMF)

48

- ▶ Create .gmfgraph, gmftool, and gmfmap model
- ▶ Generate Graphical Editor for Java

Prof. U. Aßmann, Softwareentwicklungswerkzeuge (SEW)

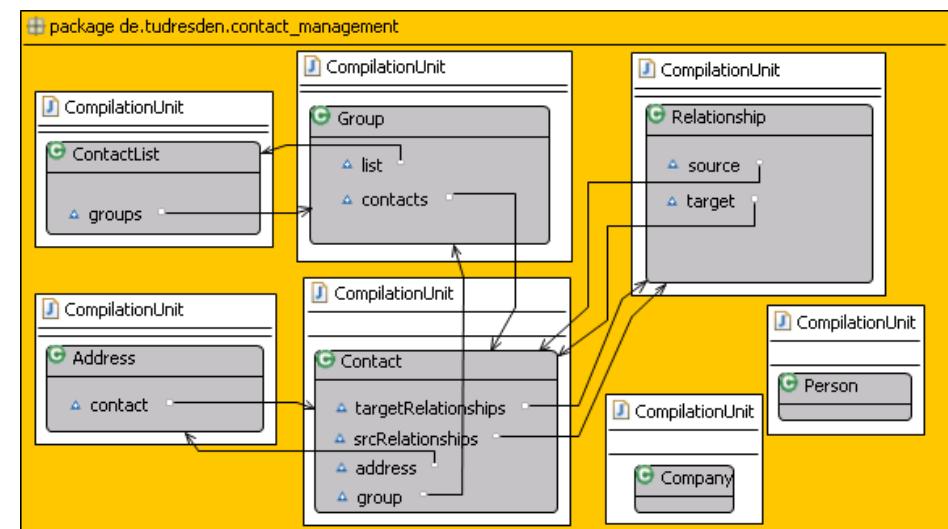

The screenshot shows two windows. On the left, the 'MappingView' window displays a tree structure under 'Feature Contact Management' with nodes like 'Group 0', 'Feature Addresses', etc., and a 'Feature Groups' node which is selected. On the right, the 'ContactList.java' editor window shows Java code for a class named 'ContactList'. The code includes protected fields for linked lists of groups and contacts, a constructor that initializes these lists, and a method 'addContact' that adds a contact to a specific group if it's not already present.

```

public class ContactList {
    protected LinkedList<Group> groups;
    protected LinkedList<Contact> contactsList;

    public ContactList() {
        groups = new LinkedList<Group>();
        contactsList = new LinkedList<Contact>();
    }

    public void addContact(Contact toBeAdded, Group group) {
        if (groups.indexOf(group) == -1) groups.add(group);
        group.getContacts().add(toBeAdded);

        contactsList.add(toBeAdded);
    }
}


```

- ▶ Typesafe Template Languages
 - Same syntax as string-based templates
- ▶ Round-trip Support for template-based code generators
- ▶ Refactoring, Optimization using model transformations
- ▶ Traceability-related activities
 - Certification (Map code to the model elements)
 - Impact analysis (How much of the code will change if I do this?)
- ▶ Model-based compilation to byte code
- ▶ ...

40.4.2 Integrating DSLs and GPLs

- (1) Use EMFText to *lift* GPLs to the technical space of DSLs
- (2) Language integration by metamodel and grammar inheritance

Integrating DSLs and GPLs

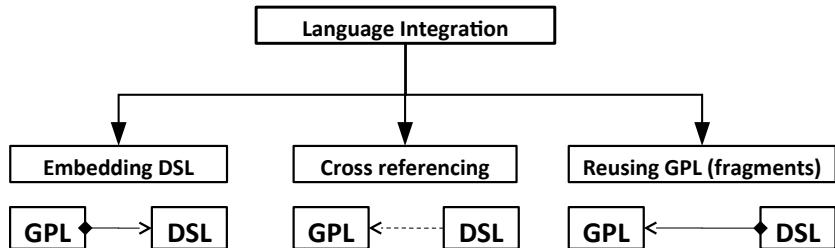

Language Integration Examples

53


- ▶ FormsExtension
- ▶ FormsEmbedded
- ▶ JavaForms

- ▶ eJava
 - Provides metamodels with Operations
 - implementations without touching the generated java files

- ▶ JavaTemplate
 - Syntax safe templates with JaMoPP

- ▶ PropertiesJava
 - Experimental extension for Java to define C# like properties

- ▶ JavaBehaviour4UML
 - An integration of JaMoPP and the UML
 - Methods can be directly added to Classes in class diagrams

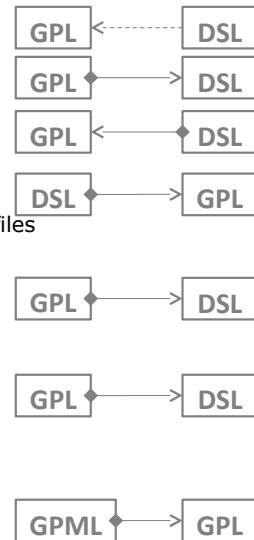

Conclusion

55

- Few concepts to learn before using EMFText
- Creating textual syntax for new languages is easy, for existing ones it is harder, but possible (we did Java)
- Rich tooling can be generated from a syntax definition
- Textual and graphical syntax can complement each other (e.g., to support version control)
- Semantics (Interpretation/Compilation) must be defined manually – At most it can be reused

*Language is the blood of the soul into which thoughts run
and out of which they grow.*

(Oliver Wendell Holmes)

Prof. U. Aßmann, Softwareentwicklungsgerze (SEW)



Prof. U. Aßmann, Softwareentwicklungsgerze (SEW)



40.5. The EMFText Syntax Zoo (>90 residents)

54

- ▶ Ecore, KM3 (Kernel Meta Model)
- ▶ Quick UML, UML Statemachines
- ▶ Java 5 (complete), C# (in progress)

- ▶ Feature Models
- ▶ Regular Expressions
- ▶ OWL2 Manchester Syntax

- ▶ Java Behavior4UML
- ▶ DOT (Graphviz language)

...and lots of example DSLs

<http://emftext.org/zoo>

Prof. U. Aßmann, Softwareentwicklungsgerze (SEW)



Prof. U. Aßmann, Softwareentwicklungsgerze (SEW)



Thank you!

Questions?

<http://www.emftext.org>

emftext